

SECD/SECSD SECURITY BARN LIGHT

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® BarnYard fixtures are an excellent replacement for the traditional HID BarnYard fixtures. They offer great energy savings while delivering brilliant illumination quality. naturaLED® BarnYard fixtures feature a Photocell sensor built-in and IP65 Rated with an optional 16-inch extension arm.



Optional 16-inch Extension Arm Available



Photocell Sensor built-in

Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Alleyways, parking lot, security, pole barn, street, area, driveway lighting

FEATURES

- Energy Star
- IP65 Rated
- ETL Listed
- Built-in photocell
- ColorTemp: 4000K
- Input line voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 25W =1KV / 40W=3.7KV
- CRI: 80
- Operating temperature: (25W) -22°F - 131°F / (40W) - 4°F-122°F
- Recommended 15-30 foot height performance
- Material: (25W)Polycarbonate / (40W) Die cast aluminum
- Net Weight: (25W) 1.5lbs / (40W) 4.95lbs
- 5 Year Warranty
- Finish: Black
- Optional for Purchase: 16" extension arm

ACCESSORIES



Extension arm

SAMPLE NUMBER		LED-FXSECSD25/40K		
STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP
LED led lighting	FX fixture	SECSD security barn lights	25 25 watt	40K 4000K



BARN LIGHT (SECD/SECSD)

WALL & SECURITY LUMINAIRES


ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP65 Rated	Energy Star
24	7790	LED-FXSECD25/40K	4000K	2,246	100	Black	•	•
40	7049	LED-FXSECD40/840	4000K	4,806	200	Black	•	-

ACCESSORIES (Ordered Separately)




Extension Arm
P10054 MT-DEA16
 (Dusk to Dawn 16" Extension Arm Pole)




DIMENSIONS

24W (SECSD)
 1.50-lbs

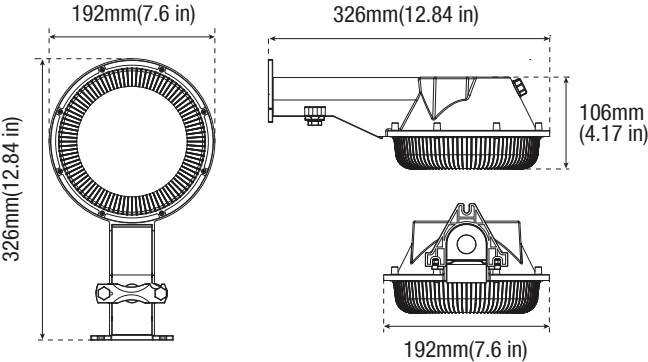


40W (SECD)
 4.95-lbs

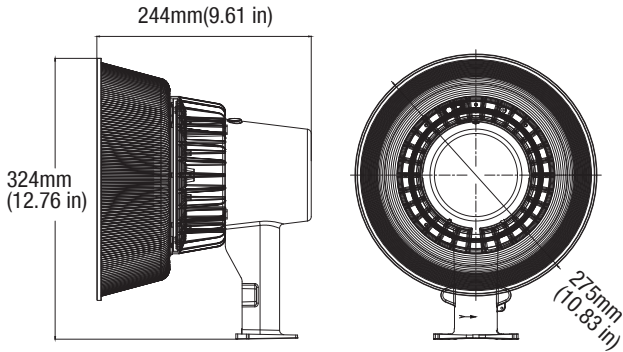

PHOTOMETRICS CHART


24 Watt
 Energy Star

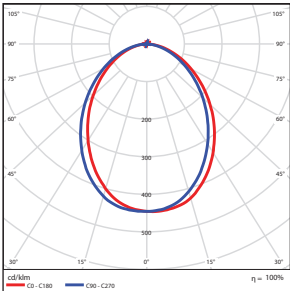

Center Beam fc	Beam Width	
2.5R	16.0 ft	5.0 ft
5.0R	40.0 ft	10.0 ft
7.5R	17.8 ft	15.0 ft
10.0R	10.0 ft	20.0 ft
12.5R	6.40 ft	25.0 ft
15.0R	4.45 ft	30.0 ft

Vert. Spread: 90.0°
 Horiz. Spread: 90.4°

40 Watt

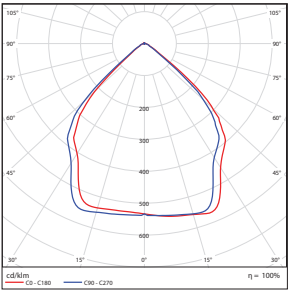

Center Beam fc	Beam Width	
2.5R	37.1 ft	4.9 ft
5.0R	92.8 ft	9.8 ft
7.5R	41.2 ft	14.8 ft
10.0R	23.2 ft	19.7 ft
12.5R	14.8 ft	24.6 ft
15.0R	10.3 ft	29.5 ft

Vert. Spread: 89.1°
 Horiz. Spread: 83.4°

PACKAGE

Case Qty 1 pc

