US-4i SYSTEM
Quick-Connect Installation

1.) HOW TO CONNECT QUICK-CONNECT FITTINGS

Insert tube and push through the o-ring to the tube stop

2.) HOW TO DISCONNECT FITTINGS

Push in collet against face of fitting and hold. Remove tube. Fitting can be reused

To Existing Faucet

⅜" Compression Union

Quick-Connect Fittings

Pressure Reducing Valve

⅜" Tubing

Cold Water Shutoff

US-4i Filter
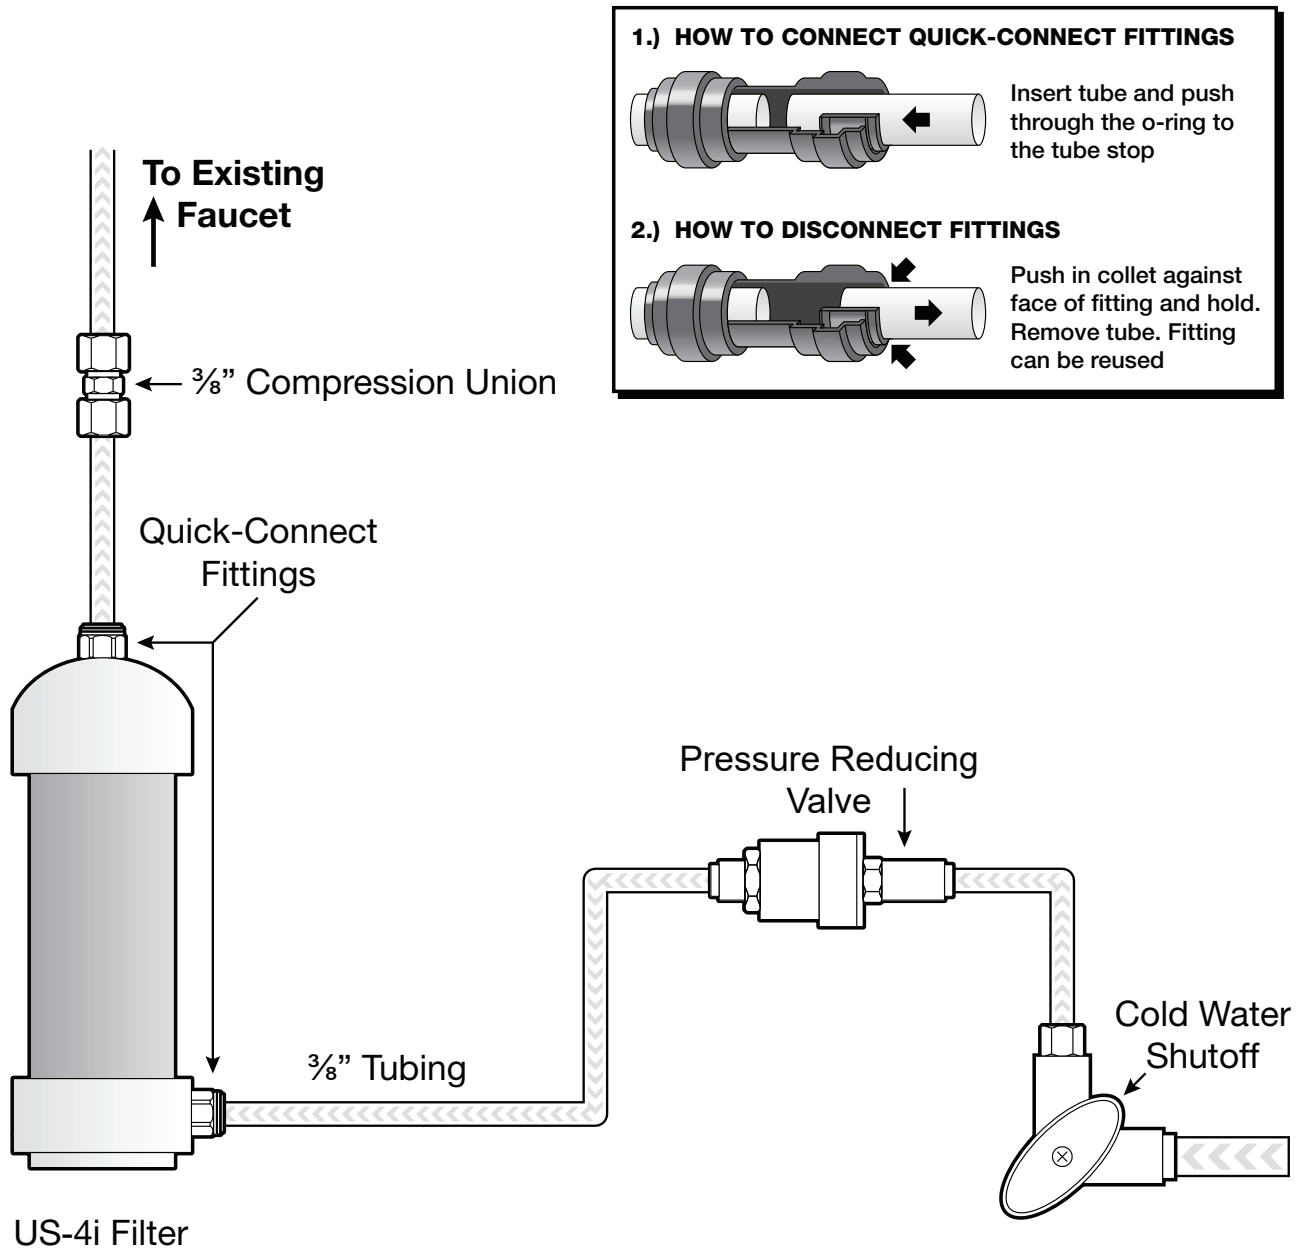
Enclosed Parts List:

(1) 6' × ⅜" Tubing
(1) ⅜" Compression Union
(1) ⅜" Pressure Reducing Valve