


To open the filter chamber



Turn over
the Airpura




Remove the 4
retaining screws



Take off
the cover




Remove
the gasket




Position
the Prefilter
inside the filter
chamber



Place a felt gasket at
the bottom of the
filter chamber




Place the HI-C filter
around the Hepa filter and
Attach the HI-C filter with
the elastic bands




Unfold the filter slider
(Supplied with replacement
filters or on request
Part#6F 001)




Roll it
into a spiral




Insert the tube into
the filter chamber
inside the Prefilter



Let the spiral open to
fill the opening




Open the top of the
spiral to make a
slight funnel




Insert the
Carbon canister
into the funnel and
hold it straight



Let the canister
slide down
the filter slider



Pull the filter slider
up out of the cavity
using both hands
and let the canister
slide to the bottom
of the cavity



Remove the filter
slider and fold it for
further use




Slide in the
Hepa filter

To close the filter chamber



Replace
the gasket



Position the
indentation in the cover
into the center of the
HEPA filter



Replace
the 4 screws
and tighten



Turn the Airpura
back on casters

Airpura 
AIR PURIFIERS

T600

OPERATING
&
FILTER REPLACEMENT
DIRECTIONS

Distributed By:
Pure n Natural Systems, Inc.
1-800-237-9199
www.purenatural.com

TO BEGIN USING YOUR AIRPURA

Inspect the exterior of your Airpura to verify there is no damage from shipping. If any damage is noted, please follow the instructions from the distributor returns policy.


Wipe the unit with a damp cloth to remove any dust from packaging

Plug the unit into a regular grounded 110 volt outlet

Turn on the unit to MAX and allow it to run for a few minutes

Set the variable speed control to the level you wish

The most efficient way to use your Airpura for regular air quality maintenance is to run it at a low speed **24 hours a day 7 days a week.**

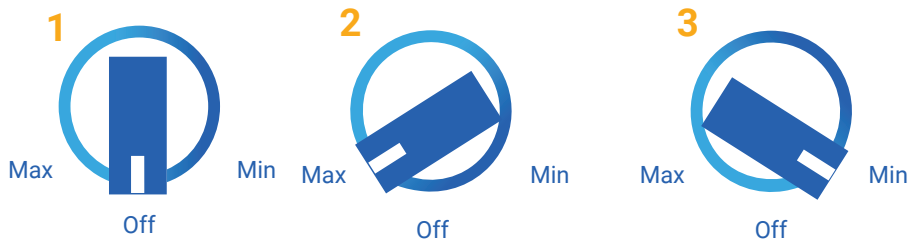

FILTER MAINTENANCE AND REPLACEMENT

The Prefilter


Can be vacuumed from the exterior of the unit once a month or more often. Should be replaced at least after 12 months of use

To vacuum the Prefilter


Use the brush attachment on your vacuum cleaner
Vacuum slowly around the mesh surface of the filter chamber

IMPORTANT SAFETY NOTE


Please ensure air purifier is turned OFF when plugging into a power source. Failure to do so may result in motor potentially stalling and/or burning.



TarBarrier Prefilter
3-6 months



HepaBarrier 600CT Filter
(95 % efficient @ 1 Microns)
12-16 months



26 lbs, Coconut Shell Carbon Filter (100 % Blend), 3 inch
24 months

Technical specifications

Tobacco smoke odor, and chemical control

26 lbs activated Carbon
13"H x 13.25"OD x 7.5"ID

Carbon bed

3 in deep x 570 in² surface

Tar removal

Special TarBarrier filter
570 in² x 1 in deep

Particle suppression

HepaBarrier

Air Flow 560 cfm

More cfm than any other home unit available

Housing

Powder coat steel

Size

23 in x 15 in

Weight

49 lbs total

Watts

120 on high / 40 on low

Sound Level

28.1 db on low (at 6 feet)
62.3 db on high (560 cfm)
(Room level 25.1 db)

ETL Certified

Conforms to CSA C22.2
no 113 ANSI / UL 507



Air purifiers models and filter configurations

	Prefilter	Carbon
Alternates	Cotton Prefilter Poly Prefilter	26 lbs Anthracite Carbon Filter (100% Blend)
Upgrade		26 lbs Impregnated Carbon Filter (17% KI/ Potassium Iodide, 83% Coconut Shell Carbon) 26 lbs Impregnated Carbon Filter (35/65% Blend: KI/ Potassium Iodide, Coconut Shell Carbon)