

Product Specifications

Style Number	VV012
Construction	Waterproof Foamed Core
Edge Profile	Enhanced Painted Bevel
Nominal Dimensions	7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.09"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	23.64 sq ft	2 sq m
Pieces per Box	10 pcs	
Weight per Box	39.68 lbs	17.99 kg
Boxes per Pallet	35 boxes	



753 Axial Oak

Colors

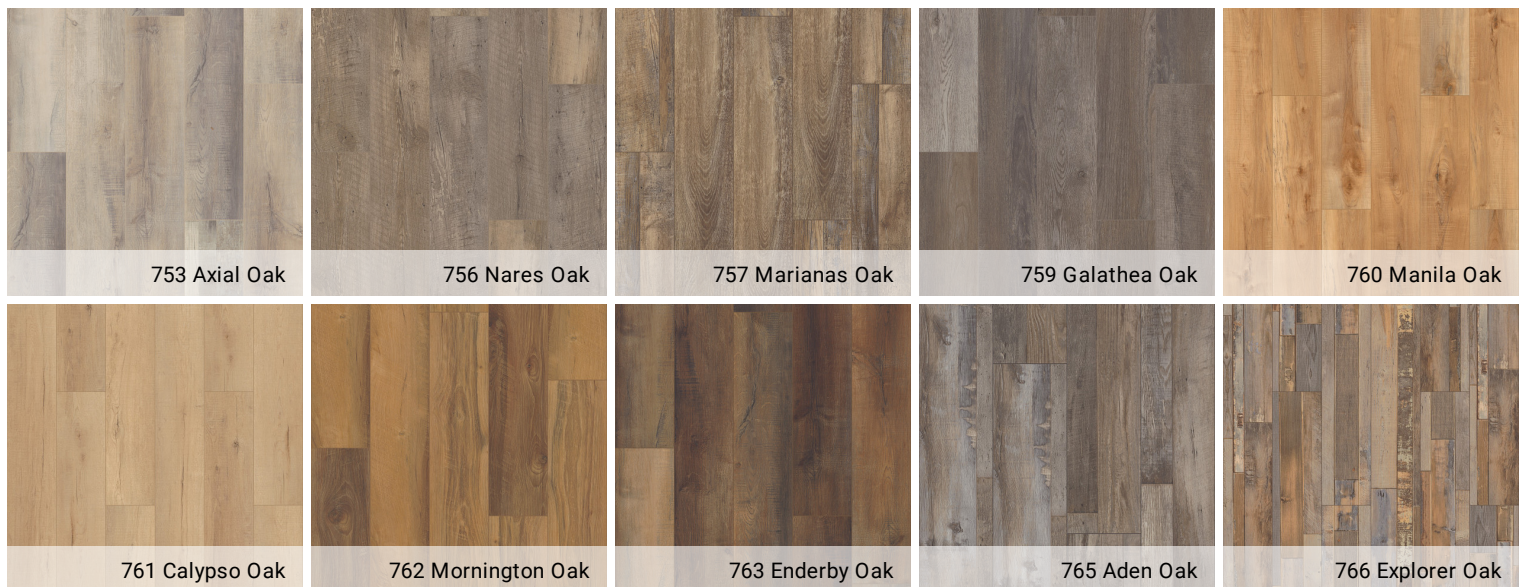

753 Axial Oak

756 Nares Oak

757 Marianas Oak

759 Galathea Oak

760 Manila Oak

761 Calypso Oak


762 Mornington Oak

763 Enderby Oak

765 Aden Oak

766 Explorer Oak

COREtec Plus Enhanced Plank 7"

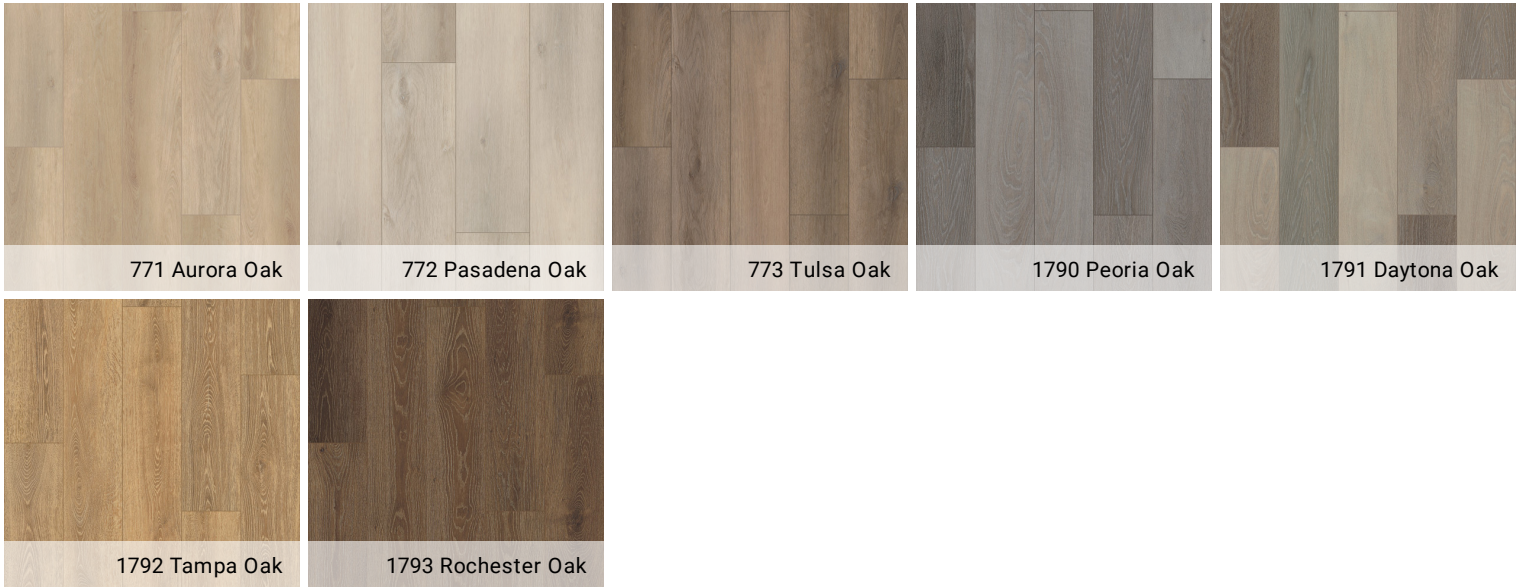

Performance

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- USF 10 Year Medium Commercial

Certifications


GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim




Baby Threshold*

01V19 | 94"
01V20 | 94"




T-Molding*

02V62 | 94"




Quarter Round

01V46 | 94"



Overlap Stairnose*

01V95 | 94"



Flush Stairnose

02V17 | 94"

*Packaged with molding track



COREtec Plus Enhanced Plank 7"

Stair Tread



Stair Tread
03Z70 | 48"