2-Way Shoe Stretcher

HFA111/112



Warning

- Make sure not to hold the long wooden block too tightly when rotating the black metal bar.
- Excessive tension when adjusting the stretcher can cause damage to both the shoe and the stretcher.

Imported by:

KCT Leisure Glebe Farm, Old London Road, Copdock, Ipswich, Suffolk, IP83]N, United Kingdom

User Instructions

- 1. Remove the Shoe Stretcher and Black Adjusters from packaging.
- 2. Insert Shoe Stretcher into the shoe that you want to stretch.
- 3. Ensure that the short wooden block located at the heel of the stretcher is situated at the heel, inside the shoe.
- 4. If you want to stretch particular areas of the shoe even further, loosen the Shoe Stretcher and remove. Then insert the black adjusters to achieve a custom shape to stretch desired areas (See Fig. B) and perform steps 2 and 3 again.

Note: Rotate *clockwise* to expand the shoe stretcher, and *anti-clockwise* to contract the shoe stretcher. (See Fig. C)

Rotate the black plastic knob near the heel to stretch the shoe length-ways, and rotate the metal bar to stretch the shoe width-ways.




Fig. A




Fig. B

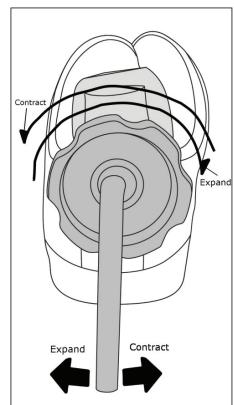


Fig. C