

M2

Professional Passthrough Dishwasher – 500mm Rack W 705mm x D 720mm x H 1530mm

The Washtech Professional Range combines the best of modern technology with an uncompromising use of high quality components and heavy duty stainless steel construction. The result is a machine that you can rely on for great wash results for many years to come.

The Washtech M2 will fit into bench gaps between 595mm and 640mm, and incorporates intuitive electronic controls providing soft wash start, eco power saver system, easy to read temperatures for HACCP reporting, chemical pump adjustments and priming, cycle customisation, immediate fault diagnosis and many other options. All reasons why the M2 remains one of the most popular passthrough dishwashers on the market.

Standard Features

- Autostart on door closure 1, 2 and 3 minute cycles
- Up to 1080 plates per hour
- QuikConnect Installation with everything you need including:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - Unique 595mm to 640mm bench gap compatibility
 - 15 amp plugset (or easy 3 phase connection)
 - No commissioning required
- Reliable results through upper and lower wash and rinse arms with precision moulded jets
- Durable stainless steel construction
- Moffat's Comprehensive 5-2-1 Warranty
- Low cold water consumption of 2.4 litres per cycle
- Assured final rinse ensures the correct temperature and pressures everytime through it's rinse pump and 316 stainless break tank
- Soft start ensures great results through progressively pressurising the cycle to provide a consistent and even clean every time
- EcoPower reduces temperatures and energy consumption when machine is not being used
- Reliable double filtration system via scrap trays and separate wash inlet filter




Includes:

- 2 x 600 70028 – 500mm dish rack
- 1 x 600 70029 – 500mm cup rack
- 2 x C660503 – cutlery container



M2

Professional Passthrough Dishwasher – 500mm Rack
W 705mm x D 720mm x H 1530mm

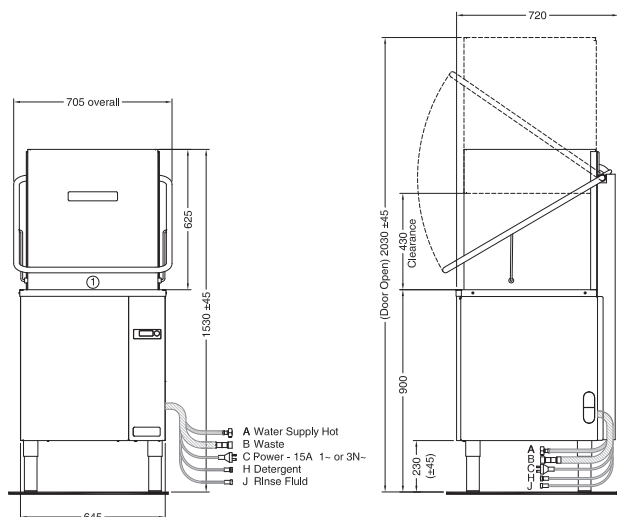

- In-line Installation**
 ① Bench gap is 595 or 640 with bench brackets removed
Corner Installation
 ② wall to front inside corner of wash tank 700
 ③ machine must face left for access to controls
 ④ allow 300 clearance beneath bench to front for service access
 ⑤ splashback return no higher than 150
 ⑥ left side is mirror image

A Hot Water

Temperature	65°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	15 litres per min
Quality	Potable & soft
Backflow Prevention	Dual Check Valve (DCV)
Consumption	2.4 litres per cycle

B Waste

Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
------------	---

C Electrical

Single phase	240V 50Hz 15A
Three phase	415V 50Hz 15A/phase

Maximum Power Consumption

Single phase	3.7kW
Three phase	9.0kW

Heating

Wash	2.5kW
Rinse	3.0 or 6.0kW

Dimensions

Width	705mm
Depth	720mm
Height	1530mm
Weight	94kg

Packed Dimensions

Width	760mm
Depth	830mm
Height	1450mm
Weight	125kg
Cubicmetres	0.91m³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	CL ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions



© Copyright Moffat Ltd
Moffat / 11.16

an Ali Group Company



The Spirit of Excellence