

450 nm Low Noise Blue Laser Diode MLL-III-450

Model #: MLL-III-450

Description: Blue diode laser module at 450 nm MLL-III-450 features ultra compact, long lifetime, low cost and easy operating.

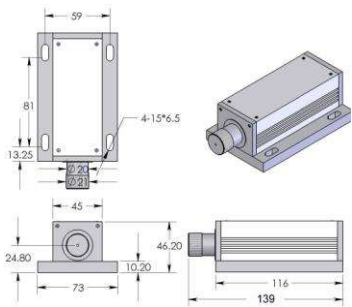

Application: Scientific research, laser pointing, show and RGB mixed laser systems applications, etc.

Specifications

Wavelength (nm)	450 ± 5	
Output Power (mW)	>1, 10, 20, ... 500	>500, 600, ... 1000
Transverse Mode	Near TEM ₀₀	
Operating Mode	CW	
Noise of Amplitude (rms, 1 ~ 20 MHz)	<1%	
Power Stability (rms, over 4 hours)	<1%, 3%, <5%	
Warm-up Time (minutes)	<5	
Beam Divergence, Full Angle (mrad)	<1.5	<3.0 x 0.5
Beam Diameter at the Aperture (mm)	~5.0	~ 2 x 4
Beam Height from Base Plate (mm)	24.8	
Pointing Stability after Warm-up (mrad)	<0.05	
Operating Temperature (C°)	10 ~ 35	
Power Supply (90-264VAC or 5V DC)	PSU-III-LED or PSU-III-FDA	
Expected Lifetime (hours)	10000	
Warranty Period	1 year	

Ordering Information: MLL-III-450-A-B-C

A: maximum output power	B: power stability	C: power driver
200 - 1 - 200 mW	1 - 1%	1 - PSU-III-FDA
500 - 500 mW	3 - 3%	2 - PSU-III-LED
1000 - 1000 mW	5 - 5%	
X - other		

MLL-III-450	PSU-III-LED
 <p data-bbox="446 441 714 472">139(L)×73(W) ×46. 2(H) mm³, 0.6kg</p>	 <p data-bbox="933 441 1209 472">153 (L) ×155(W) ×92 (H) mm³, 1.5kg</p>
	
PSU-III-FDA	
 <p data-bbox="446 1081 722 1102">133 (L) ×130(W) ×65 (H) mm³, 1.2kg</p>	
	

