


**QUICRUN WP 1080 G2**

**QuicRun WP Crawler Brushed**

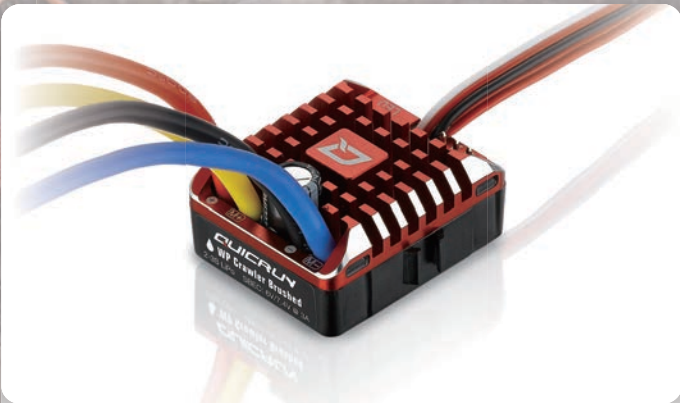

Model	<b>QUICRUN WP 1080 G2 Brushed</b>	<b>QuicRun WP Crawler Brushed</b>
Cont. / Peak Current	80A/400A	80A/400A
Motor Type	Brushed Motor (540 / 550 / 775 size motors)	Brushed Motor (540 / 550 / 775 size motors)
Operating mode	4	3
Applications	1/10 <sup>th</sup> Rock Crawler	1/10 <sup>th</sup> Rock Crawler
Motor Limit	Brushed Motor Limit with 2S LiPo / 6S NiMH: ≥ 10T or RPM<30000@7.4V (540/550 size motors) Brushed Motor Limit with 3S LiPo / 9S NiMH: ≥ 16T or RPM<20000@7.4V (540/550 size motors)	Brushed Motor Limit with 2S LiPo / 6S NiMH: ≥ 10T or RPM<30000@7.4V (540/550 size motors) Brushed Motor Limit with 3S LiPo / 9S NiMH: ≥ 16T or RPM<20000@7.4V (540/550 size motors)
LiPo / NiMH Cells	2-3S LiPo / 5-9S NiMH	2-3S LiPo / 5-9S NiMH
BEC Output	6V / 7.4V / 8.4V @ 4A (Switch-mode)	6V / 7.4V@ 3A (Switch-mode)
Connectors	Input End: XT60; Output End: 4.0mm Bullet Connectors (Female)	Input End: XT60; Output End: No Connectors
Size	37.2 x 31.9 x 18.4mm	36.2 x 31.6 x 17.0 mm
Weight	70.2g (with wires&connectors)	58.5g(with wires&connectors)
Programming Port	Separate Port	Separate Port