

# WATER MY BATTERY

## WATERING WITH A GRAVITY TANK:

Always wear personal protective equipment (goggles, gloves, etc.) to protect yourself from sulfuric acid.

Only water batteries after they have been fully charged or acid spillage may occur.

Read instructions in entirety before beginning the installation.



### Fully charge the batteries.

Only water fully charged batteries or acid spillage may occur during charge.

Remove large white cap and fill tank with distilled water.

Replace cap.



Tank should be positioned 3 feet or more above the batteries to ensure proper water flow.

Remove the small white cap before connecting it to the system.


Tap or shake the line to force air out of the line. This will optimize water flow.



Remove the dust cap from the male connector on the watering system.



Connect by inserting the male connector on the watering system into the female connector on the gravity tank fill line.


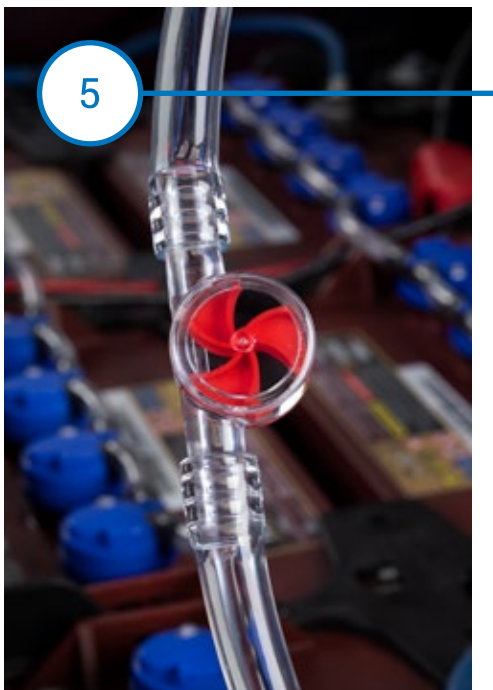


The flow indicator will begin spinning indicating that water is flowing into the battery.



Watering is complete when the flow indicator stops spinning **OR** all of the indicator eyes are up.

Indicator eyes should be viewed from the side, not directly above.

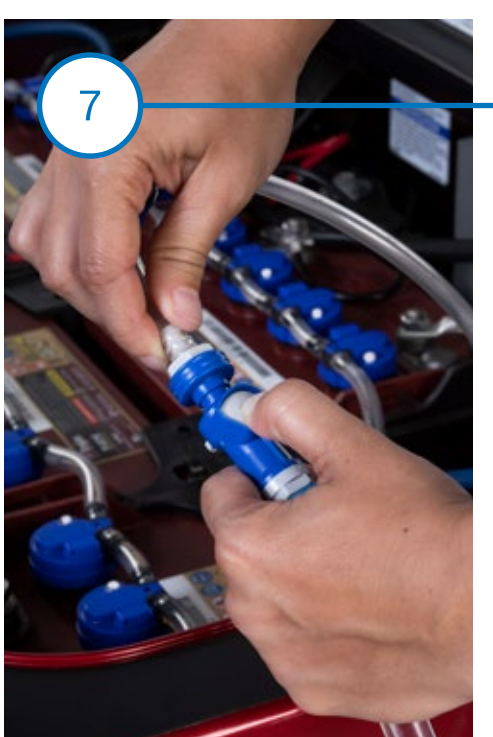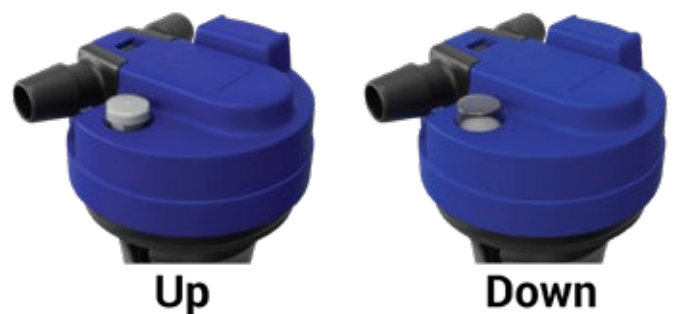

**Always** disconnect the tank after watering.

Press the button on the female connector to disconnect the tank from the watering system.

Replace the dust cap on the watering system to keep dirt and debris from entering the watering system.

**NEVER LEAVE THE WATERING SYSTEM CONNECTED TO THE GRAVITY TANK OR ANY OTHER FILLING DEVICE.**