

WATER MY BATTERY

WATERING WITH A MANUAL PUMP:

Always wear personal protective equipment (goggles, gloves, etc.) to protect yourself from sulfuric acid.

Only water batteries after they have been fully charged or acid spillage may occur.


Do not store the manual pump in the battery compartment.

Read instructions in entirety before beginning the installation.




Fully charge the batteries.

Only water fully charged batteries or acid spillage may occur during charge.

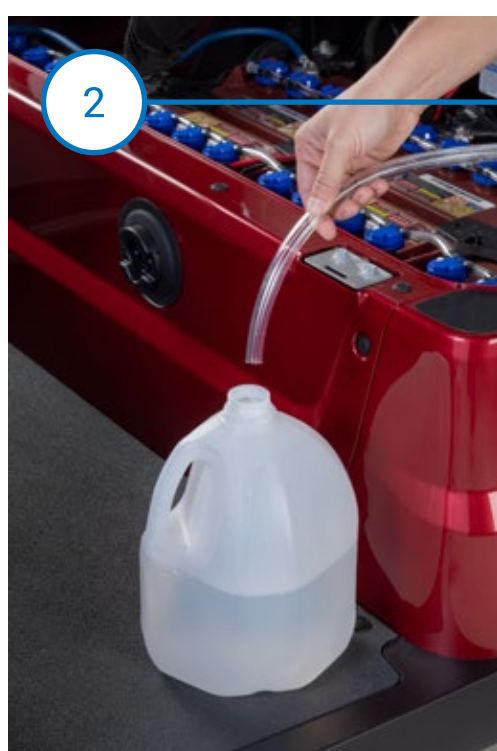


Insert the open end of the pump into a jug of distilled water.

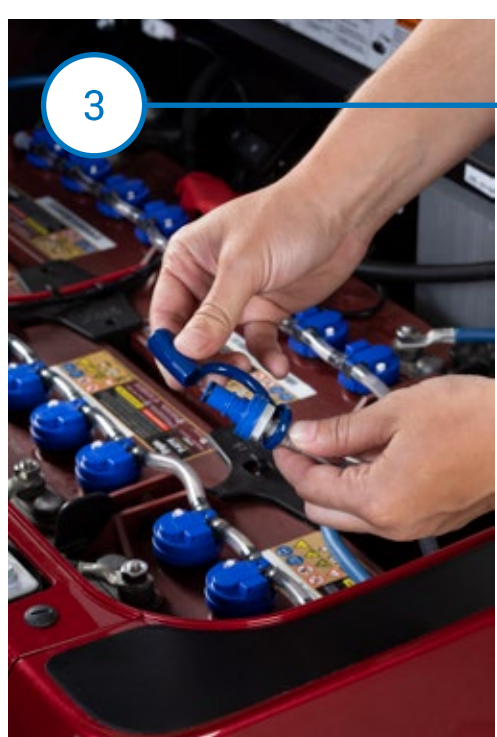

Remove the dust cap from the male connector on the watering system.



Connect by inserting the male connector on the watering system into the female connector on the manual pump.

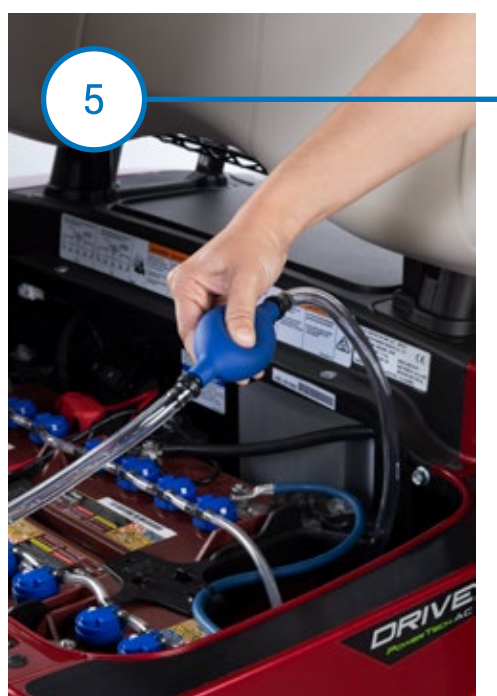

Squeeze the bulb on the manual pump to begin filling the battery cells with water.



Watering is complete when the bulb becomes hard **OR** all of the indicator eyes are up.

Indicator eyes should be viewed from the side, not directly above.



Always disconnect the pump after watering.

Press the button on the female connector to disconnect the pump from the watering system.

Replace the dust cap on the watering system to keep dirt and debris from entering the watering system.

NEVER LEAVE THE WATERING SYSTEM CONNECTED TO THE MANUAL PUMP OR ANY OTHER FILLING DEVICE.