

| PRODUCT | MODEL | RETICLE | SKU# |
|--------------------------------|---------------|------------------|--------|
| CRONUS BTR GEN2 UHD RIFLESCOPE | 4.5-29x56 FFP | APLR5 FFP IR MOA | 210113 |

IDEAL APPLICATION



ALTERNATIVE APPLICATION



TOP FEATURES

UHD GLASS

Extra low dispersion glass gives you an advantage with an image that has little or no chromatic fringe for the ultimate clearest and sharpest image

PRECISION ZERO STOP

Our precision zero stop system allows you to return to your initial zero position with a sharp and precise stop, right on your initial zero.

XPL PROTECTIVE COATING

A protective coating that gives you extra protection on the exterior lenses to prevent the scope from enduring dirt, oil, and potential scratches.

ALL FEATURES


- UHD GLASS
- ADVANCED FULLY MULTI-COATED LENSES
- XPL PROTECTIVE COATING
- ARGON PURGED
- PRECISION ZERO STOP
- HIGH PRECISION ERECTOR SYSTEM
- AIRCRAFT GRADE ALUMINUM TUBE
- ILLUMINATED RETICLE
- ETCHED GLASS RETICLE
- WATERPROOF
- FOG PROOF
- SHOCKPROOF
- ONE PIECE TUBE CONSTRUCTION

SPECS

| | |
|----------------------------|--------------------|
| Power | 4.5-29X |
| Obj. Lens | 56 mm |
| Tube Size | 34 mm |
| Turrets | Exposed |
| Eye Relief | 3.6-3.8" |
| FoV @100Y | 24.8-3.83 ft |
| Click Value | 0.25 MOA |
| Adjustment Per Rotation | 25 MOA |
| Total Elevation Adjustment | 110 MOA |
| Total Windage Adjustment | 64 MOA |
| Parallax Adjustment | Side Focus 25yds-∞ |
| Purging Material | Argon |
| Weight | 35.8 oz |

DIMENSIONS

| L1 | L2 | L3 | L4 | L5 | L6 | D1 | D2 |
|-------|------|------|------|------|------|------|------|
| 14.4" | 4.1" | 6.4" | 3.9" | 2.6" | 2.1" | 1.8" | 2.6" |

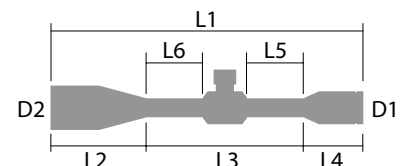

**SHARP, TIGHT
AND PRICED
JUST RIGHT!**