




MODEL LN-PSW: REMOTE PRESSURE SWITCH

To use the pressure switch first remove the battery cap from your infrared illuminator, then replace the pressure switch cap (1) in place of the battery cap. Turn the infrared illuminator ON and press the pressure pad (2). IR illuminator should activate ONLY while the pressure pad button is pressed. This saves the battery time and helps you to stay covert during field use.

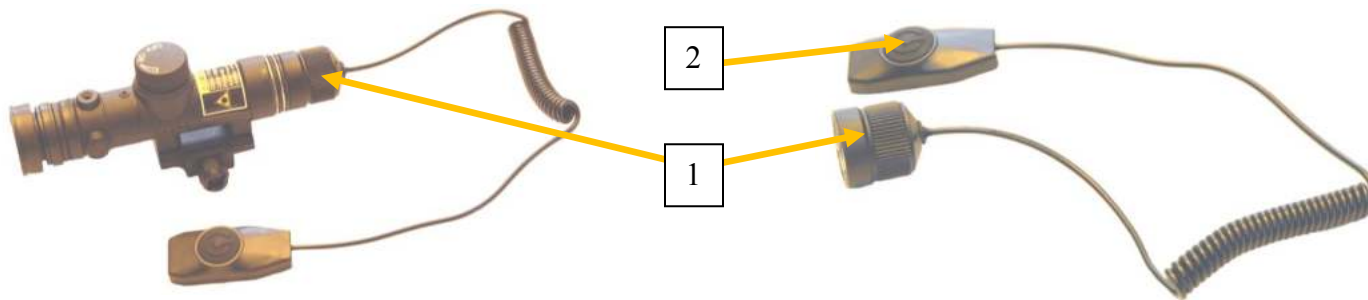

Now attach the Velcro pad onto the bottom (flat) side of the pressure pad. We suggest to attach Velcro the way where the soft side will be on the pressure pad and coarse side will stay on the weapon in order to prevent the weapon side to become dirty during exposure to outside elements.

Position the illuminator and the pad within the comfortable reach and attach the pressure pad onto the surface of the weapon or any device you will be holding. Your illuminator is now ready to operate remotely using the pressure pad.

Should you have any questions regarding operation or mounting of this pressure switch, please do not hesitate to give us a call at 972-722-1100 or e-mail us at: info@lunaoptics.com

