

# 475Be-8/16 1" exit HF driver



## SPECIFICATIONS

Nominal exit diameter	1"/25.4 mm
Rated impedance	8/16 $\Omega$
Power handling <sup>1</sup>	50 W
Continuous program power <sup>2</sup>	100 W
Sensitivity <sup>3</sup>	109 dB
Rated frequency range <sup>4</sup>	1.0 kHz – 25 kHz
Recommended min. XO frequency	1.2 kHz
Re	6.2/12.4 $\Omega$
Minimum impedance	7.6/ 15.0 $\Omega$
Diaphragm material	Beryllium
Voice coil diameter	Proprietary
Voice coil winding	Proprietary
Voice coil wire	Proprietary
Voice coil former	Proprietary
Magnet	Ferrite ring


## Mounting and mechanical parameters


Mounting	2 x 1/4"-20 holes on $\varnothing$ 3.0" (76.2mm)@180° 3x1/4"-20 holes on $\varnothing$ 2.25 (57 mm)@120°
Overall diameter	133.4 mm (5.25 in)
Overall depth	56.0 mm (2.2 in)
Net weight	2.9 kg (6.4 lbs.)

## Optional accessories

Replacement diaphragm assembly	1450PB – binding posts
--------------------------------	------------------------

- Distinguished by transparent, high resolution sound, while effectively minimizing typical compression driver distortion
- designed to withstand long term high stress operation with high peak factor
- ideal for touring sound, stage monitors, high performance installed and portable sound systems
- heat stabilized polymer surround ensures low distortion at high SPL and long term performance stability
- high performance 44.5mm (1.7") edge-wound ribbon wire voice coil with advanced adhesives for maximum reliability
- extended to 25 kHz frequency range
- 100 W continuous program power
- self-aligning diaphragm assembly facilitates service in the field

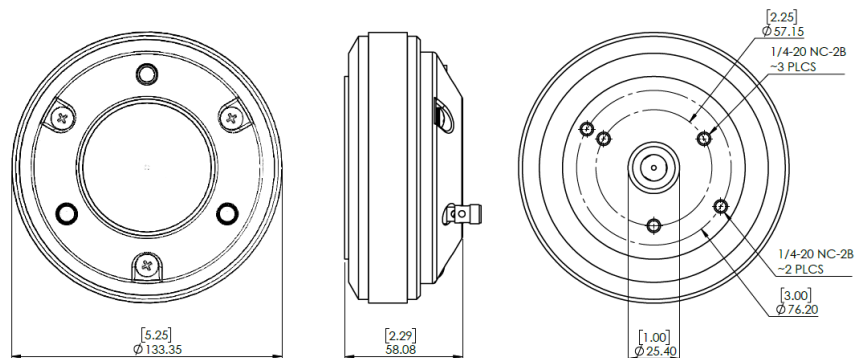

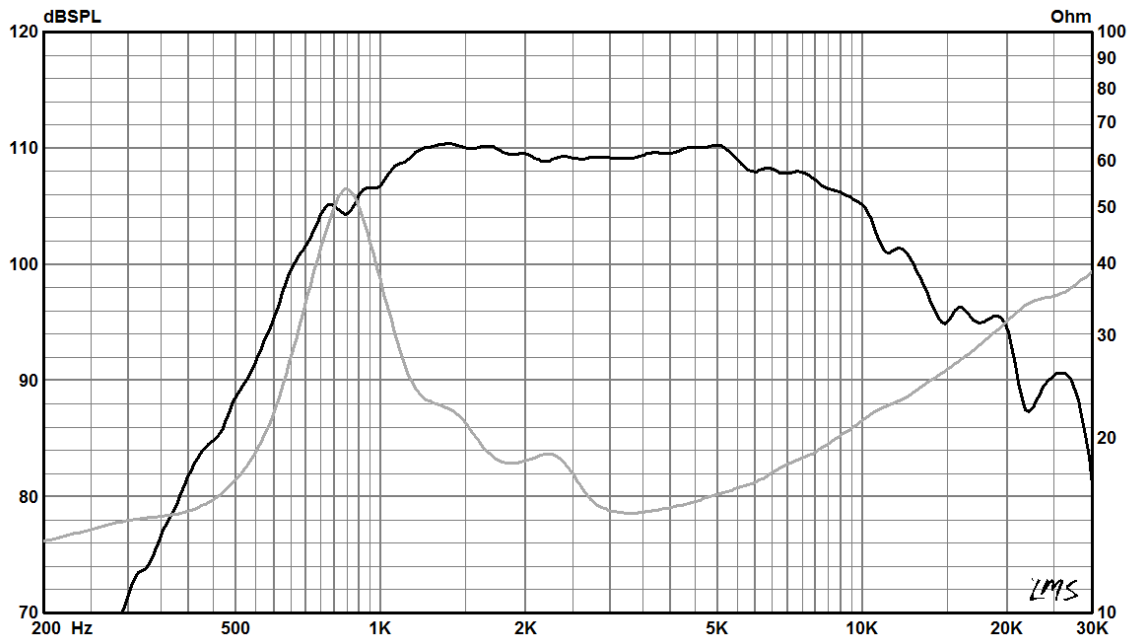

Frequency response and impedance of 475PB-16  
on specified horn, free field <sup>3</sup>.

## Specifications notes

1. As per AES2-1984 Rev.2003. Radian Audio tests power using voltage levels calculated based on rated impedance, according to AES and IEC 60268-5 standards, as better reflecting real life operating conditions. To be distinguished from power specification approach that uses minimum impedance, resulting in inflated power rating.
2. Continuous program power is defined at 3dB higher than AES power and reflects power handling capacity for typical music and cinema content reproduction.
3. Driver mounted on horn with 90°x60° nominal coverage and following dimensions: 203 mm (8") mouth width, 178mm (7") mouth height, 127mm (5") horn depth. Measured at 1W/1m in simulated free field conditions as per AES 2-2012 and IEC 60268-5 (Ed.3.1 2007-09). Sensitivity is calculated based on SPL frequency response at 1W/1m, averaged in 1.0 kHz – 4 kHz band.
4. Specified in accordance with IEC 60268-5 (Ed. 3.1 2007-09). Defines recommended operating frequency band for typical application with 12 dB/Oct. high pass filter. Higher XO frequency and/or higher filter slope rate is recommended, if higher max SPL is required.