2-4 Digital Wireless DVR Quick Start Guide



Please read this quick start guide thoroughly before operating the device, and keep it for future reference.

Parts Identification




Power cable



Installation of U-support Bracket






AUTO BATTERY HARD WIRE CONNECTION SETUP

(most common but could vary based on preference)

Powering Monitor and Digital Camera's

- Only the black (ground) and red (power) is needed for system to work. The colored wires are
 used for a custom install with triggers. (colored wires are not typically used)
- Individually wrap wire tips with electrical tape on all other colored wires so that they do not touch metal and cause interference.
- Connect ground and positive wires to auto battery and connect other end to LCD monitor.
- Connect only the quick disconnect cable to a power source.
- Do not connect the quick connect cable from the camera until instructed below.

Remote Control Functions

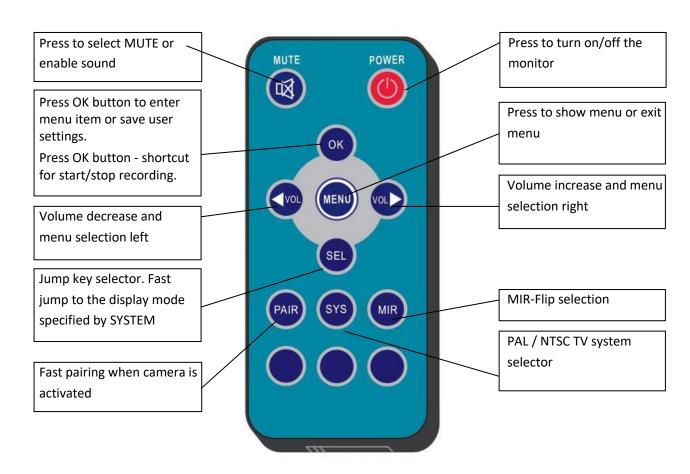

2 Camera Pairing Setup

Using remote: To Enter Menu Settings, You must ALWAYS be in SINGLE CAM View

- 1. Press Menu
- 2. Highlight "Mode" (it will be in yellow when highlighted)
- 3. Press Ok
- 4. Select Split "1-2" Mode
- 5. Press OK and wait until screen is black
- 6. Using the "SEL" button press until you see CAM1 on top left corner of LCD monitor screen.

The screen will be solid black.

- 7. Press "PAIR" on remote and then connect power disconnect cable to camera quick connect cable.
- 8. Once camera is recording, press "SEL" button until you see a black screen that says CAM2 on the top left of screen.
- 9. Press "PAIR" on remote and then connect power disconnect cable to camera quick connect cable.
- 10.Once camera is recording, press "SEL" to navigate between cameras and to display a split screen.

3-4 Camera Pairing Setup

Using remote: To Enter Menu Settings, You must ALWAYS be in SINGLE CAM View

- 1. Press Menu
- 2. Highlight "Mode" (it will be in yellow when highlighted)
- 3. Press Ok
- 4. Using "Vol" right arrow button
- 5. Navigate to highlight "QUAD" Mode
- 6. Press OK and wait until screen is black
- 7. Press the "SEL" button press until you see CAM1 on top left corner of LCD monitor screen.

The screen will be solid black.

- 8. Press "PAIR" on remote and then connect power disconnect cable to camera quick connect cable.
- 9. Once camera is recording, press "SEL" button until you see a black screen that says CAM2 on the top left of screen.
- 10. Repeat for cameras 3 and 4
- 11.Once camera is recording, press "SEL" to navigate between cameras and to display a "QUAD" mode screen