

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400 Fax (03) 9371 2499

TEST REPORT

Client :	Austex Commercial Fabrics	Test Number	:	17-001837
	PO Box 15	Issue Date	:	27/04/2017
	Thomastown VIC 3074	Print Date	:	29/06/2017

Sample Description	Clients Ref :	"Fusion"	
	Woven coated fabric		
	Colour : W	Vhite	
	End Use : U	pholstery	
	Nominal Comp	oosition :	90% Polyester, 10% Polyurethane


ASTM D2261-11

Standard Test Method for Tearing Strength of Fabrics by the Tongue (Single Rip) Procedure (Constant Rate of Extension Tensile Testing Machine)

Specimen	Length	Width				
1	188	392 N				
2	190	420 N				
3	156	438 N				
4	181	428 N				
5	186	413 N				
Mean	180	418 N				

Calculation option: Option 1: Average 5 highest peaks

Tested in conditioned state

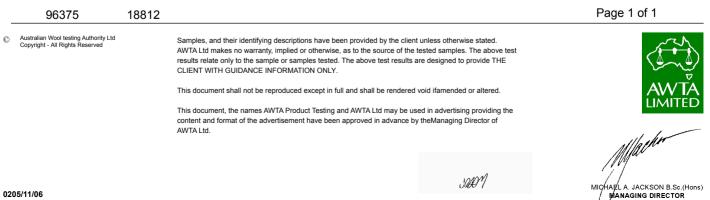

APPROVED SIGNATORY