
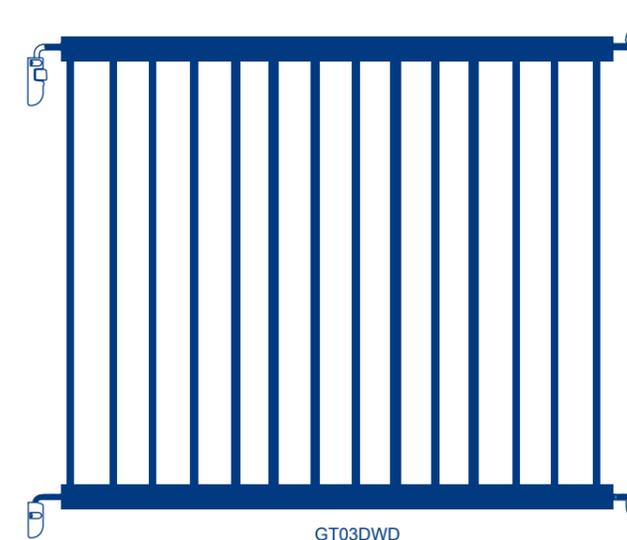


## Extending Metal Gate / Wood Gate

\*For Doorways  
and Stairways

Min. 25" - Max. 41"

Instruction Manual

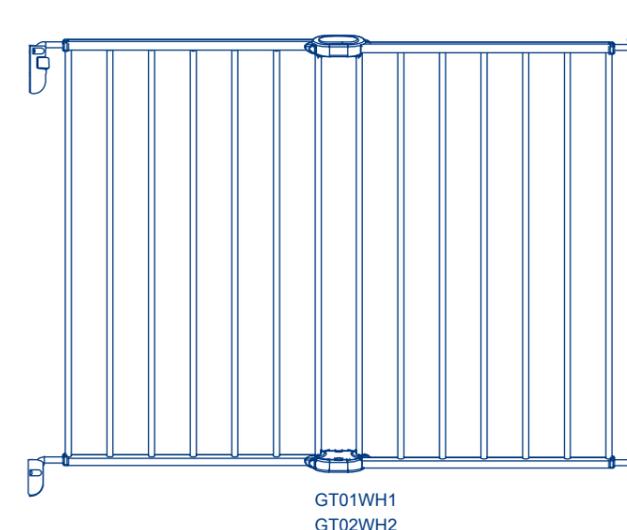

**⚠ WARNING:** Please follow all of these instructions to ensure the safety of your child. Keep these instructions for future reference.

- To prevent serious injury or death, securely install gate or enclosure and use according to manufacturer's instructions.
- This product is intended for use with children from 6 months up to 24 months of age.
- **NEVER** use with a child able to climb over or dislodge the gate or enclosure.
- **NEVER** leave child unattended. Adult supervision is required at all times.
- Install with locking mechanism on side away from child.
- Use only with the locking/latching mechanism securely engaged.
- Never step over gate.
- Adult assembly required. Exercise care when unpacking and assembling product.
- To prevent falls, never use at top of stairs.

If you experience any difficulty with assembly, missing parts or use, please **DO NOT** return this item to the store. Retail stores are unable to properly assist you. Contact our Customer Service Department directly for assistance.  
Call toll-free 1-800-328-7363, Monday - Friday,  
between the hours of 8:00 a.m. and 4:30 p.m. (PST).


GT01WH1  
GT02WH2  
GT03DWD

**baby trend**

[www.babytrend.com](http://www.babytrend.com)

0214

Check that you have all the parts for this model before assembling the gate.

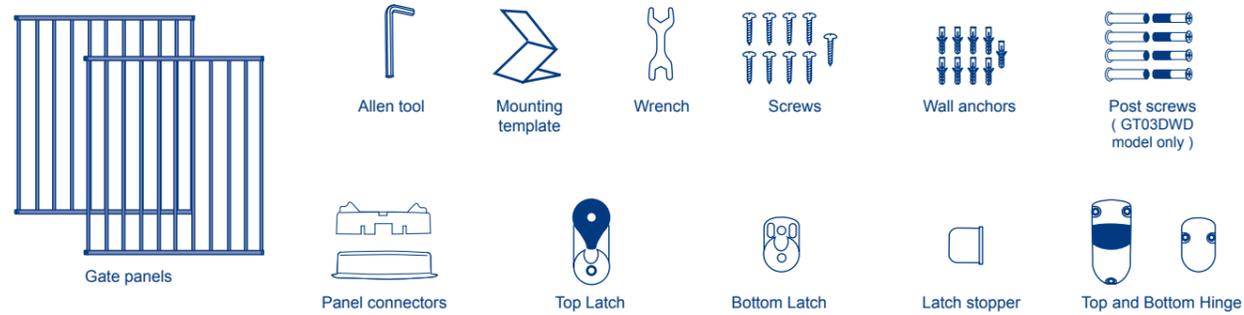



Remove contents from box

### INSTALLATION OF WALL MOUNTS

Make sure the mounting surface is even. The gate will not function properly if mounted onto base boards or moldings.

- Measure the width of the opening where the will be installed.
- Determine which side of the wall will be Hinge side and Latch side. Use the appropriate template for each side.
- Tape the appropriate template to each side of the wall. Make sure the templates are on straight and are in a verticle position. Use a pencil to mark drill hole. Hinge and latch pieces may be placed on either sides depending on direction of opening. (Fig. 1)
- Drill holes following the template. (Fig. 2)
- Remove the Template from the wall and install the Wall Anchors into the holes. (Fig. 3)
- Set the Bottom Latch to the direction of use by inserting the Latch Stopper to the opposite side. The latch stopper will prevent the gate from opening in the opposite direction. (Fig. 4)
- Using the screws provided, screw the wall mounts into the wall anchors. Tighten down the screws until the wall mounts seat flush with the mounting surface.

**Note: If the templates are not straight and vertical, the wall mounts will not be properly aligned. The gate will not open or close correctly.**

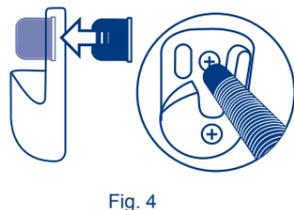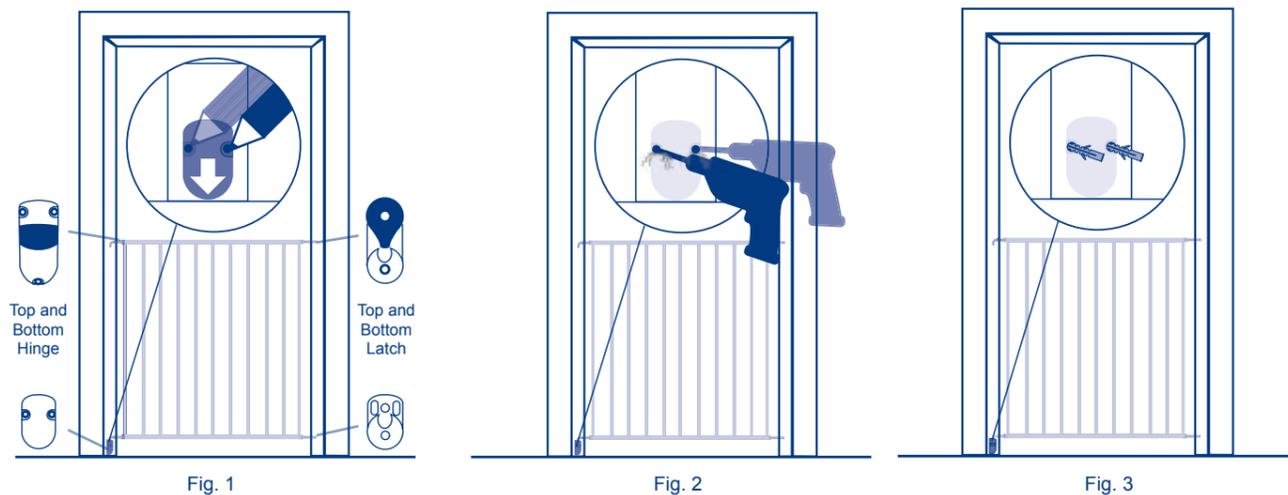

### METAL GATE INSTALLATION (GT01WH1 & GT02WH2)

- Slide each gate panel in the opposite direction to the width of your doorway. Lock panels by snapping connectors at the center of gate on the bottom and fasten screws. Repeat for the top connector (Fig. 5)

### WOODEN GATE INSTALLATION (GT03DWD)

- Slide each gate panel in the opposite direction to the width of your doorway. Lock panels by using accompanied post screws through the holes and fasten panels together. Tighten with screwdriver (Fig.6)

**Note: It is recommended to use a level to ensure the extending gate is perpendicular at a 90 degree angle to the doorway or wall.**

### HINGE INSTALLATION

- Untighten the nut on each of the latch bolt and hinge bolts. Unscrew the latch bolts and hinge bolts so that they are the same distance from the frame. (Fig. 7)
- Make sure both of the curved hinge bolts must point down towards the floor. Insert the heads of the hinges into the hinge wall mounts. Push the button on the top hinge wall mount to fully seat and lock the hinge bolt in place. (Fig. 8)

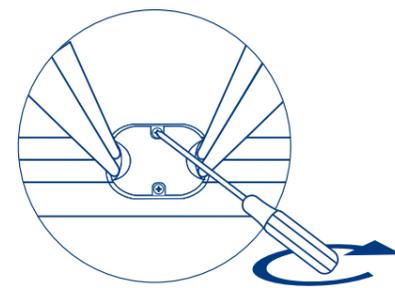
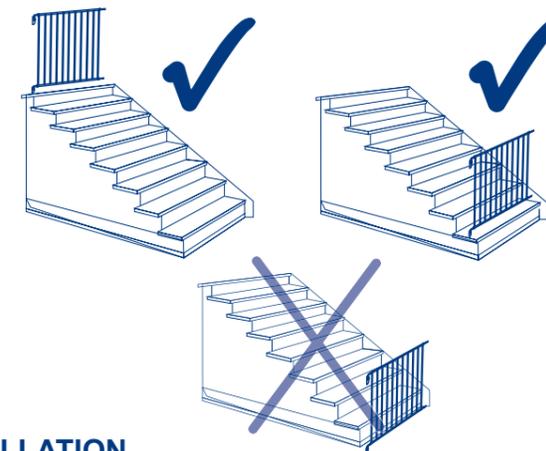


Fig. 5  
(GT01WH1)  
(GT02WH2)

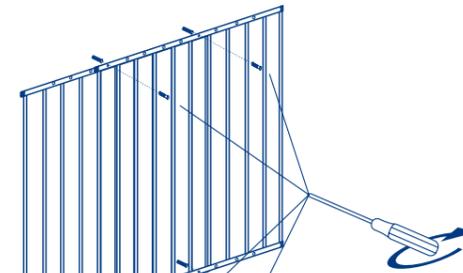


Fig. 6  
(GT03DWD)

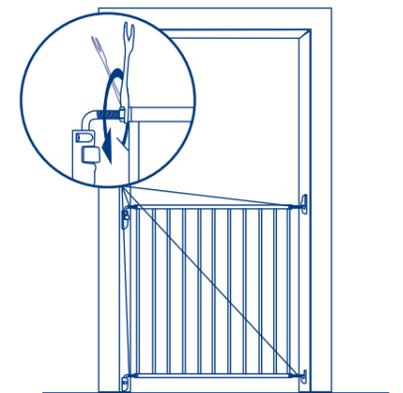


Fig. 7

### VERIFY INSTALLATION

- Push the frame to ensure that it is secure in the opening and then push the gate panel to ensure that the upper and lower latches lock securely in the housing on the frame,

**Note: If necessary, a wrench can be used for final tightening of all four tension nuts. If the gate is too difficult to unlatch, the top tension nuts may be too tight.**

### OPERATION

- To open the gate
  - Pushing the top latch with your thumb and lift gate slightly to open gate.
  - Swing open in opposite direction to door stopper.
- After closing the gate, ALWAYS check that the gate is securely latched.

### MAINTENANCE

- Regularly check gate nuts and bolts to make sure the gate is securely in place.
- Do not use the gate if any components are damaged or missing.

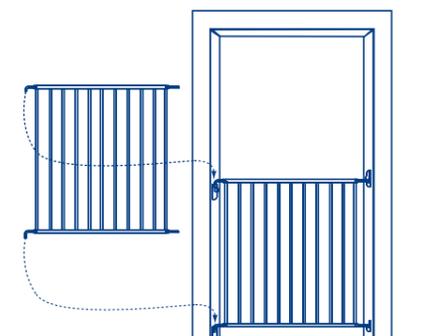


Fig. 8