


Features:



- *2 wire pure copper wire
- *14mm diameter milky transparent cover,UV-resistant,frigid-proof,enviromental-friendly and non-toxic PVC cable
- *Consume 80% less energy than traditional glass neon
- *Bend and cut or anyway you want
- *Selecting high quality LED bulbs
- *IP65,suitbale for outdoor use

SPECIFICATION

Model	Voltage	Bulb Spacing (CM)	LED qty./m	Cutting Unit	Max.current	Power Consumption (W)	Max.Load
SRP360WW-30M	120V	0.4	240pcs	0.5M	1.2A	9W/M	30M
SRP360CW-30M	120V	0.4	240pcs	0.5M	1.2A	9W/M	30M
SRP360BL-30M	120V	0.4	240pcs	0.5M	1.2A	9W/M	30M
SRP360RD-30M	120V	0.4	240pcs	0.5M	1.2A	9W/M	30M

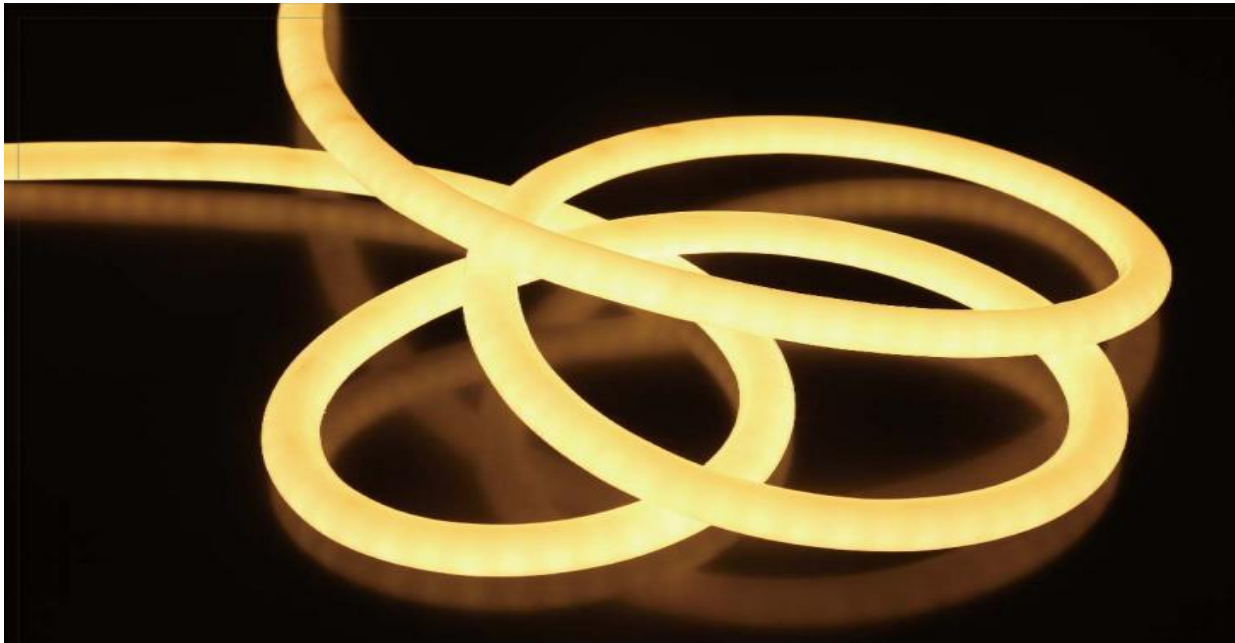

Non-extendible unit with converter assembly

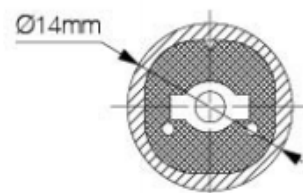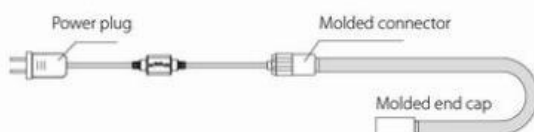

Power cord set:

6ft SJTW UL power cord with 6A rectifier, with PVC connector and UL plug and 1pc male Pin



ACCESSORIES

