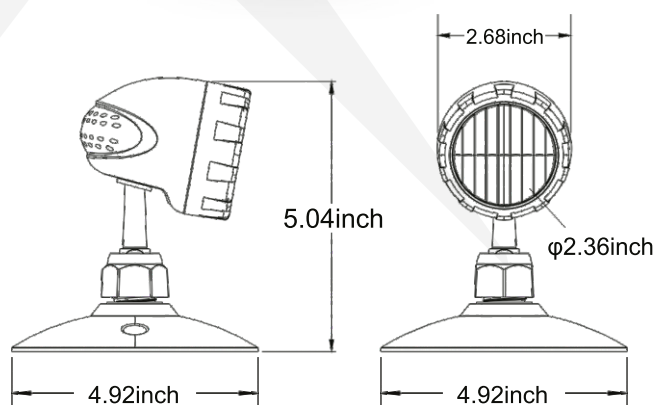
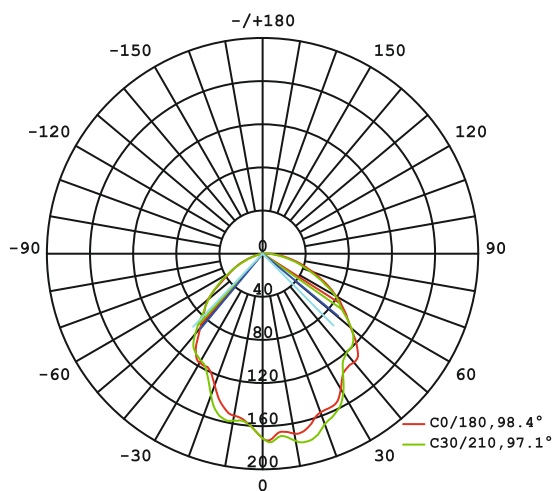
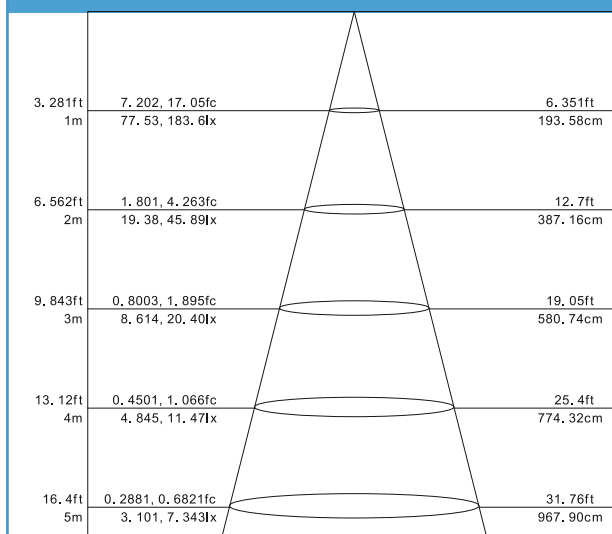


KEX3001-5W

Single LED Remote Head | WH |

**Features and Specifications:**

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and ceiling mounting
- Universal voltage LED remote compatible with any emergency lighting system (5-24VDC)
- Super bright SMD LED 5W
- Suitable for damp locations
- cULus listed

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM****AVERAGE BEAM ANGEL(50%):93.4 DEG****ILLUMINANCE(AT A DISTANCE)****HT EAVG/EMAX ANGLE:88.13DEG DIA**