



Product picture

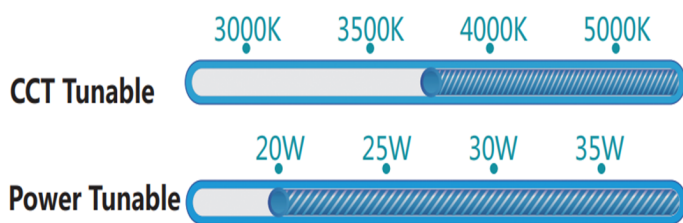



- | | | |
|---|-----------|-----------|
| } | 20W 3000K | 25W 3000K |
| | 20W 3500K | 25W 3500K |
| | 20W 4000K | 25W 4000K |
| | 20W 5000K | 25W 5000K |
| | 30W 3000K | 35W 3000K |
| | 30W 3500K | 35W 3500K |
| | 30W 4000K | 35W 4000K |
| | 30W 5000K | 35W 5000K |


Dimensions

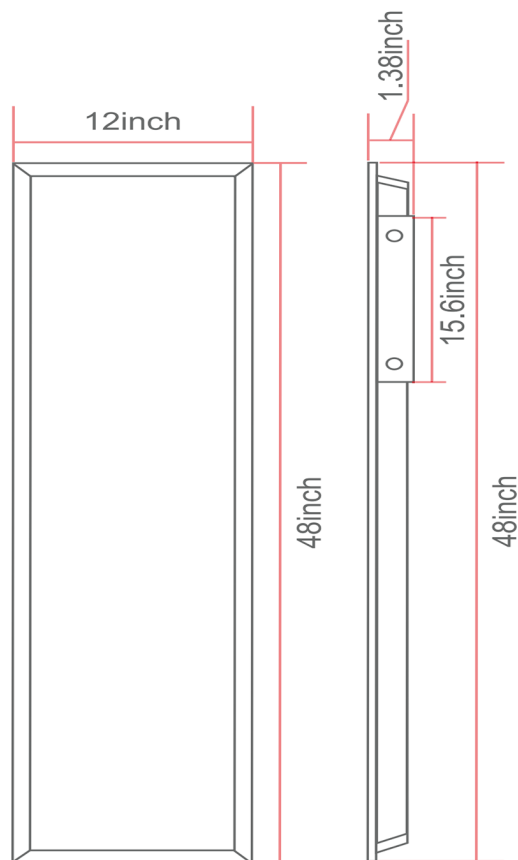


12 X 48inch 35W

- Without LGP, never turn yellow
- Isolated driver, PF>0.9, THD≤15 %
- Super bright SMD2835 LEDs, LM80 rated Ra>80
- Lumen output: 130LM/W
- IP Rating: IP40
- Operating temperature: -20°C to 50°C
- AC120-277V 0-10V dimmable
- Non-flicker, no dark spot, protect your eyes
- Ideal replacement for traditional troffer with over 80% energy saving
- 5 years warranty
- ETL,CETL

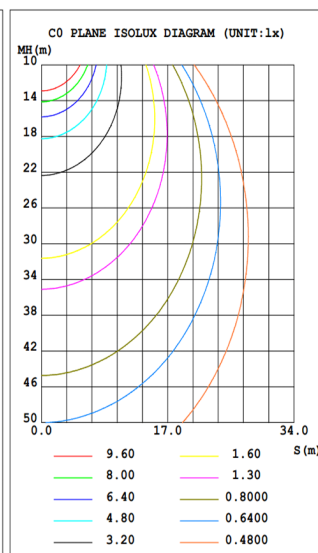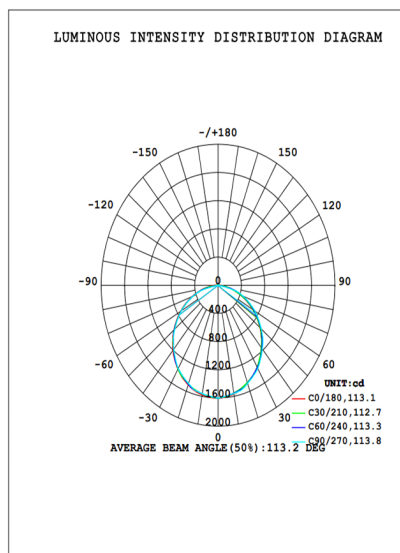


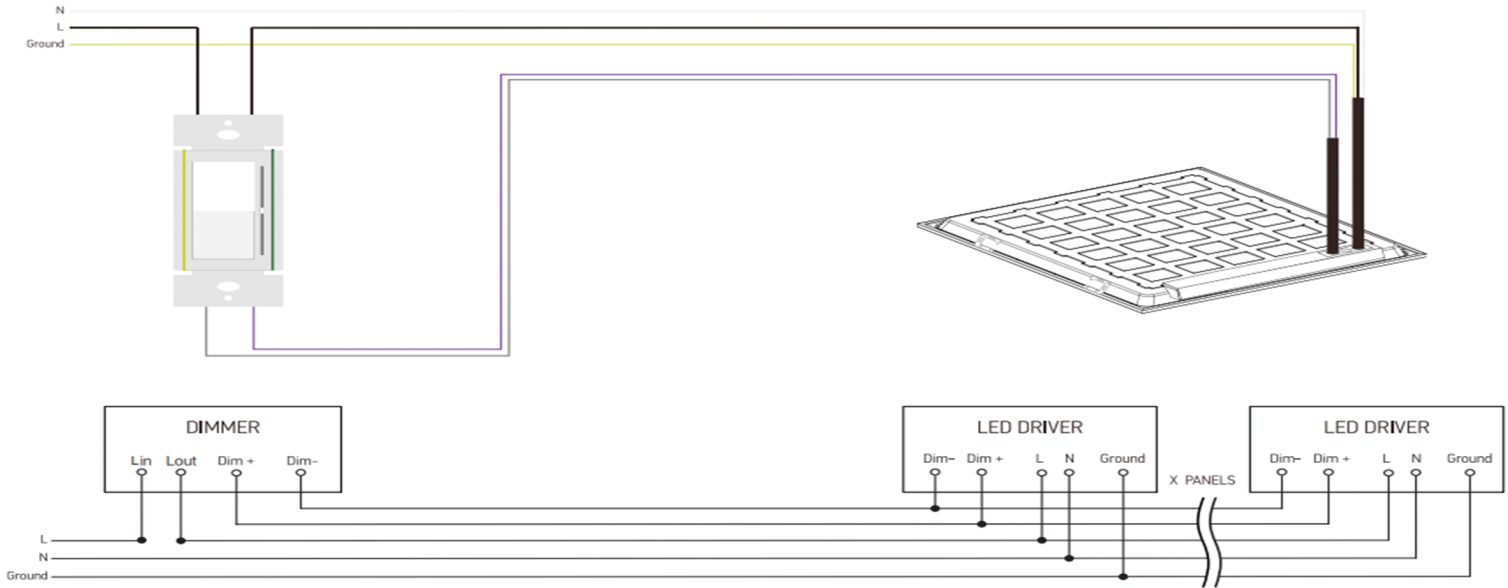

Recessed Mounted Installation

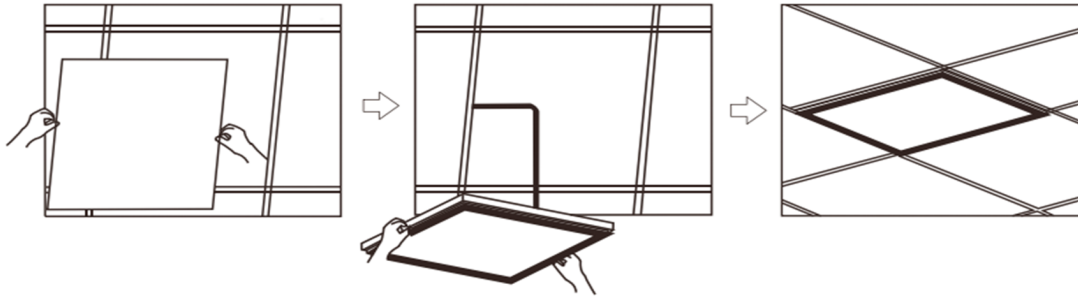

Suspending Installation

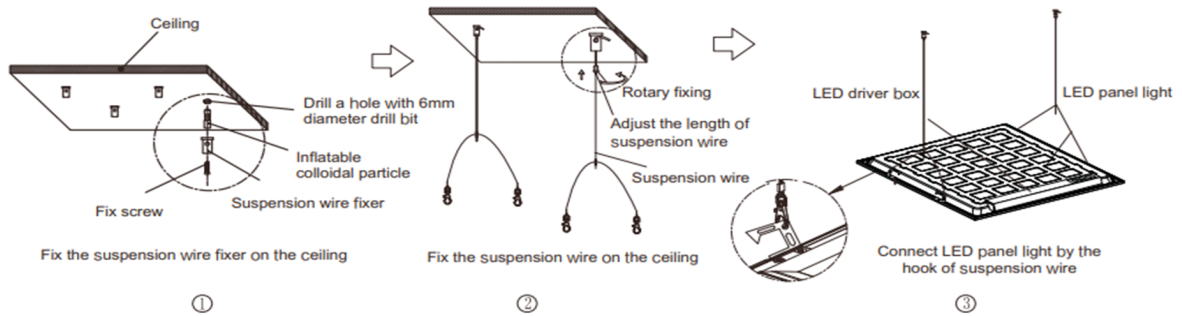

Surface Mounted Installation

