


Product picture




CCT Tunable

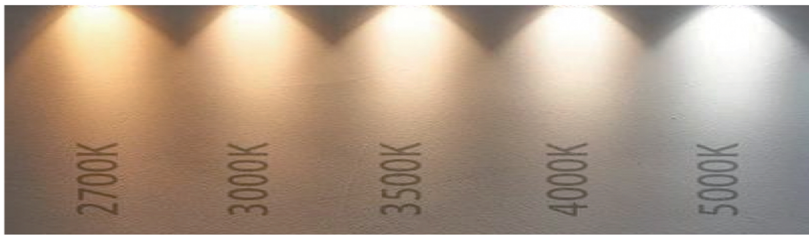

Power Tunable




Dimensions

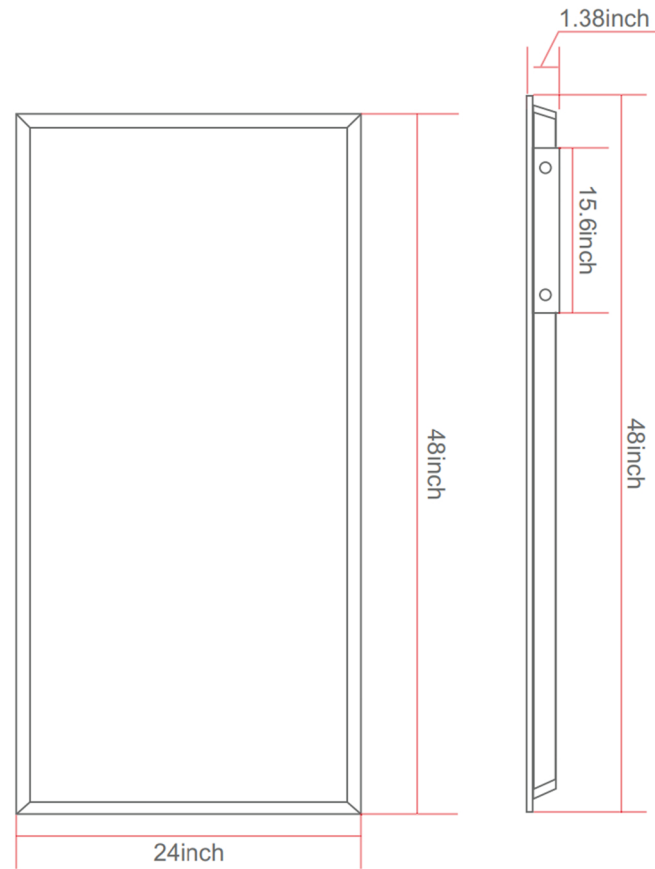


24 x 48inch 50W


- Without LGP, never turn yellow
- Isolated driver, PF>0.9, THD≤15 %
- Super bright SMD2835 LEDs, LM80 rated Ra>80
- Lumen output: 130LM/W
- IP Rating: IP40
- Operating temperature: -20°C to 50°C
- AC120-277V 0-10V dimmable
- Non-flicker, no dark spot, protect your eyes
- Ideal replacement for traditional troffer with over 80% energy saving
- 5 years warranty
- ETL,CETL

LLUMINOUS INTENSITY DISTRIBUTION DIAGRAM

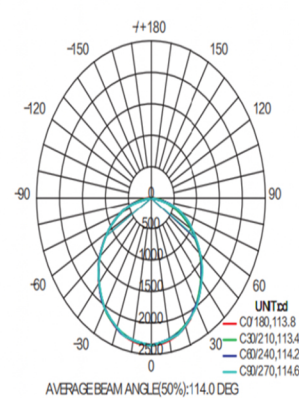


CO PLANE ISOLUX DIAGRAM (UNIT:lx)

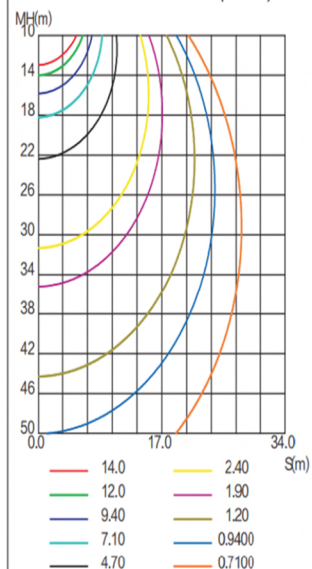


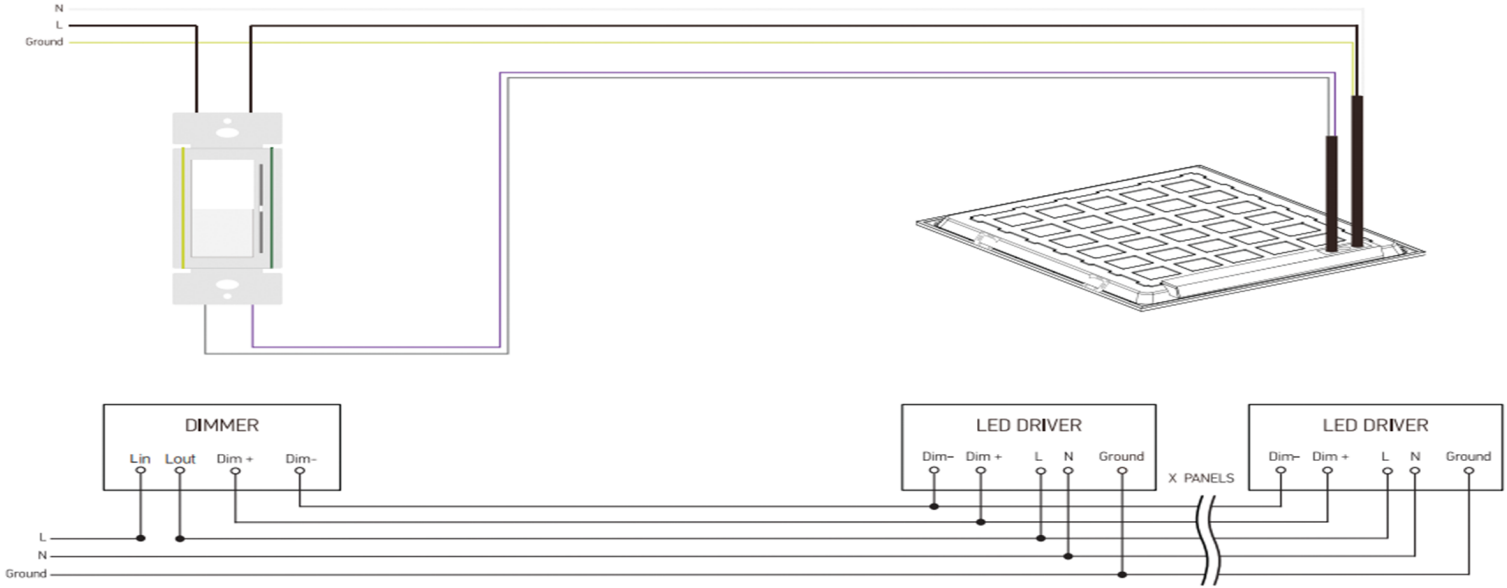

Recessed Mounted Installation

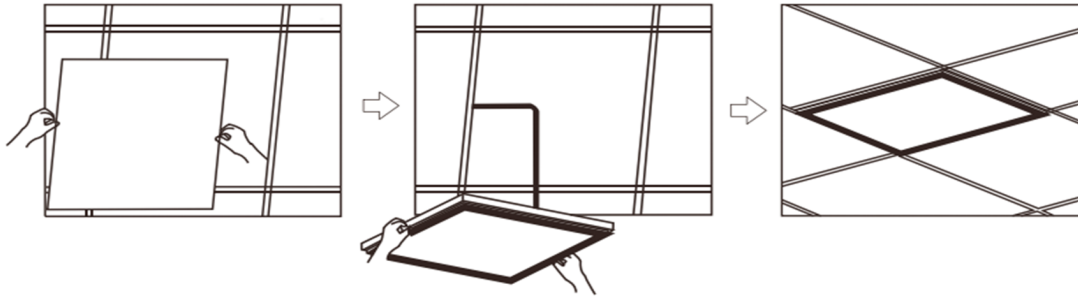

Suspending Installation

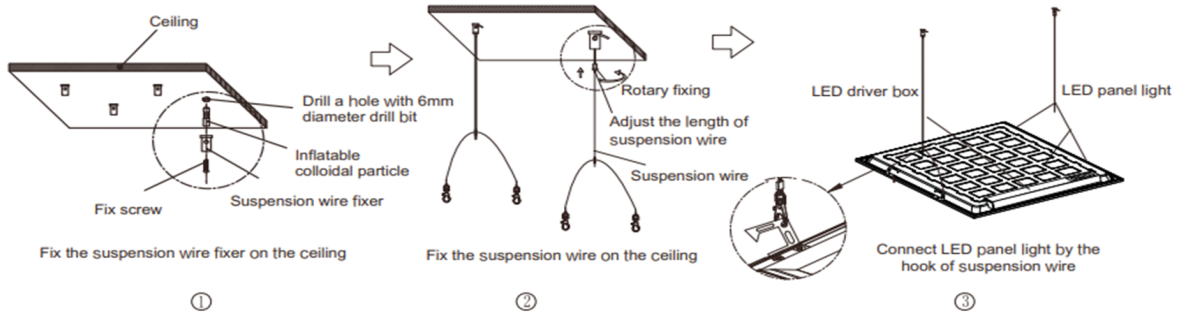

Surface Mounted Installation

