

RWF | PULSAIR™

WALL FAN HEATER



PULSAIR™

THE CLASSIC FAN HEATER

You won't find anything better than this efficient, durable and low noise fan heater. The Pulsair is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). It can also be mounted vertically or horizontally so that air can flow either up and down or right and left. Finally, the slim-line Pulsair can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for hallways or bathrooms, it can also be installed anywhere in the house, such as the office, or in commercial spaces. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 347 V, the Pulsair is recognized and recommended by those in the know.

■ VERY QUIET FAN HEATER

■ THE MOST RESISTANT GRILLE ON THE MARKET

■ INSTANT HEAT NICHROME ELEMENT

■ MULTIPLE INSTALLATION OPTIONS RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

■ ADAPTS TO MULTIPLE MARKETS AVAILABLE IN: 120 V, 208 V, 240 V AND 347 V

COLOURS

- **standard:** white, soft white
- **Orora (optional):** refer to www.stelpro.com/en-CA/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan – 40 CFM (500 W to 1000 W models) – 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

- built-in thermostat (optional), 3 control knobs included (white, soft white and black)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended


INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions

WARRANTY

- five years

FOUR INSTALLATION OPTIONS

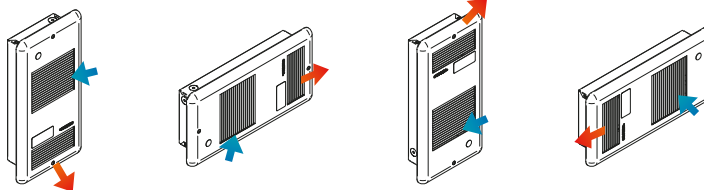

IDEAL FOR:

hallway, bathroom, locker room, office

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.



TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	VOLTAGE	FLOW	THROW DISTANCE		HEAT RISE		WEIGHT	
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS	VOLTS	CFM	M	FT.	°C	°F	KG	LB
RWF0501	214.00	---	---	---	---	500	120	40	2	6'6"	22	39	2.7	6
RWF0508	212.00	---	---	---	---	500	208	40	2	6'6"	22	39	2.7	6
RWF0502	212.00	---	---	---	---	500/375	240/208	40	2	6'6"	22	39	2.7	6
RWF0503	268.00	RWF0503T	304.00	RWF0503C24	332.00	500	347	40	2	6'6"	22	39	2.7	6
RWF0751	226.00	---	---	---	---	750	120	40	2	6'6"	33	59	2.7	6
RWF0758	223.00	---	---	---	---	750	208	40	2	6'6"	33	59	2.7	6
RWF0752	223.00	---	---	---	---	750/563	240/208	40	2	6'6"	33	59	2.7	6
RWF0753	279.00	RWF0753T	315.00	RWF0753C24	342.00	750	347	40	2	6'6"	33	59	2.7	6
RWF1001	230.00	---	---	---	---	1000	120	40	2	6'6"	44	79	2.7	6
RWF1008	225.00	---	---	---	---	1000	208	40	2	6'6"	44	79	2.7	6
RWF1002	225.00	---	---	---	---	1000/750	240/208	40	2	6'6"	44	79	2.7	6
RWF1003	282.00	RWF1003T	318.00	RWF1003C24	346.00	1000	347	40	2	6'6"	44	79	2.7	6
RWF1251	243.00	---	---	---	---	1250	120	75	2.1	6'10"	29	53	2.7	6
RWF1258	237.00	---	---	---	---	1250	208	75	2.1	6'10"	29	53	2.7	6
RWF1252	237.00	---	---	---	---	1250/938	240/208	75	2.1	6'10"	29	53	2.7	6
RWF1253	294.00	RWF1253T	331.00	RWF1253C24	358.00	1250	347	75	2.1	6'10"	29	53	2.7	6
RWF1501	248.00	---	---	---	---	1500	120	75	2.1	6'10"	35	63	2.7	6
RWF1508	243.00	---	---	---	---	1500	208	75	2.1	6'10"	35	63	2.7	6
RWF1502	243.00	---	---	---	---	1500/1125	240/208	75	2.1	6'10"	35	63	2.7	6
RWF1503	298.00	RWF1503T	334.00	RWF1503C24	361.00	1500	347	75	2.1	6'10"	35	63	2.7	6
---	---	---	---	---	---	2000	120	75	2.1	6'10"	47	89	2.7	6
RWF2002	264.00	---	---	---	---	2000/1500	240/208	75	2.1	6'10"	47	89	2.7	6
RWF2008	264.00	---	---	---	---	2000	208	75	2.1	6'10"	47	89	2.7	6
RWF2003	321.00	RWF2003T	357.00	RWF2003C24	384.00	2000	347	75	2.1	6'10"	47	89	2.7	6

Add W for white or SW for soft white (consult the optional colours chart or contact your Stelpro representative for all other colours).
Models also available in 277 V. --- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
RWFT1*	built-in single pole thermostat [120 V-347 V]	38.00
RWFT2	built-in double pole thermostat [120 V-347 V]	51.00
RWFSA*	surface adapter	56.00

* Add W for white or SW for soft white.

TECHNICAL DRAWINGS

