



Q3_r











500 LUMENS

SPECIFICATIONS

 Li-Ion 2200 mAh	 245 m	 139 g	 10° - 70°
---	--	--	--

WHAT'S IN THE BOX

TORCH	POUCH	STRAP	ADAPTER	CHARGER	USB-CABLE	BATTERIES	MANUAL
							

UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.


USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A-230VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.

SPARE BATTERY - 18650

With two 2200 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption, and you won't have to worry about discontinuing the use of the torch to charge the battery.

LIGHT CURVE AND RUNTIMES

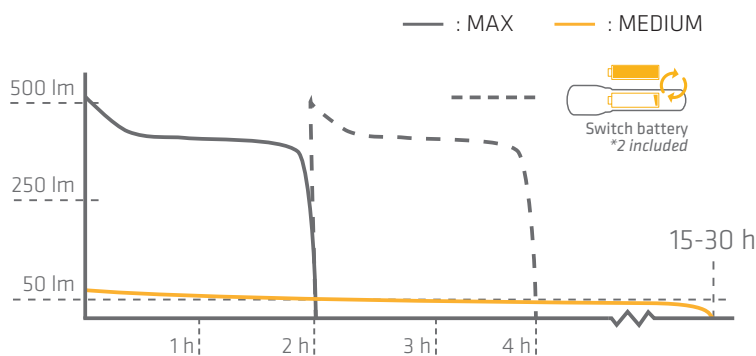

MAX	500 LUMENS 50	2 _h	x2
HIGH	250 LUMENS 25	3 _h	x2
MEDIUM	50 LUMENS 5	15 _h	x2
LOW	15 LUMENS 1.5	89 _h	x2

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Switch With Touch Function - Switch At Rear
Dimensions:	L: 127.7mm, ø: 26.5mm
Weight incl. battery:	139g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +35°C

ELECTRONICS

Built in Controller:	Yes, 5-step controller by press or touch
Standard Power Source:	Li-ion 18650 (2200 mAh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / 245 Meters
Luminous Flux:	Max: 500 lm / High: 250 lm / Medium: 50 / Low: 15 Lumen / Stroboskop 10 Hz
Lighting Time:	Max: 2h / High: 3h / Medium: 15h / Low: 89h
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 18650 Charger

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 9,7 cm / 390 g
Master Box Content / Size / Weight:	32 pcs, 41 x 41 x 39.5 cm / 14.5 kg
Order's Address:	info@suprabeam.com

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



EXTERNAL FAST CHARGING + SPARE BATTERY

Charge one battery externally while using the other in the torch



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere