


Drywall PRO Model Specification Sheet

Perspective View

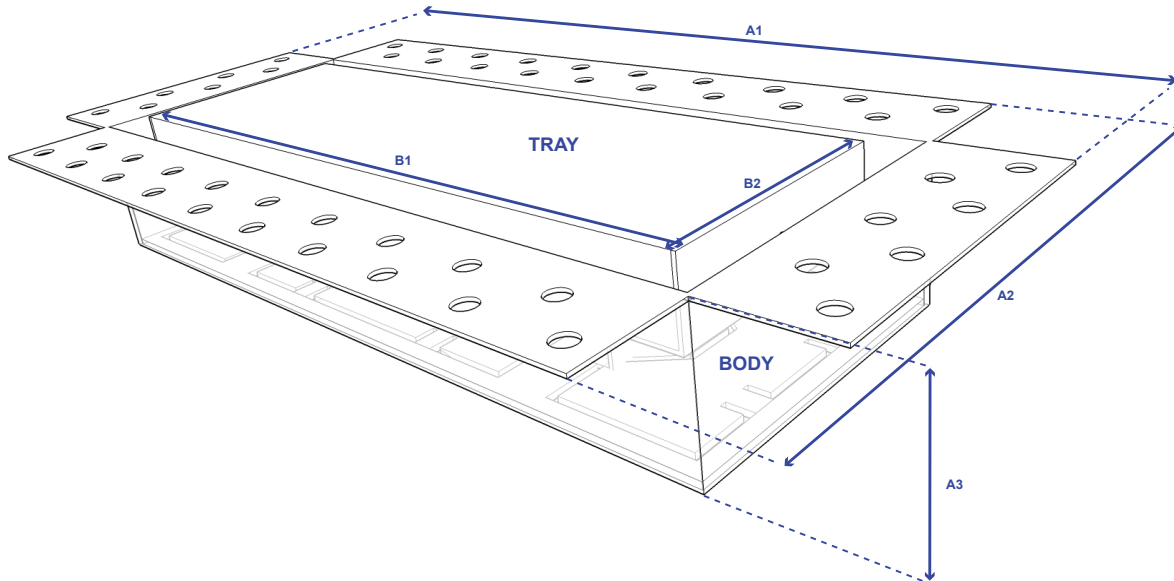


Component Dimensions

Imperial

| DRYWALL PRO | 4"X10" | 4"X12" | 6"X10" | 14 1/4"X10" | 30 1/4"X10" |
|-------------|---------|---------|---------|-------------|-------------|
| A1 | 12 1/4" | 14 1/4" | 12 1/4" | 16 3/4" | 32 3/4" |
| A2 | 6 3/16" | 6 3/16" | 8 3/16" | 12 1/2" | 12 1/2" |
| A3 | 1 3/4" | 1 3/4" | 1 3/4" | 1 3/4" | 1 3/4" |
| B1 | 8 7/8" | 10 7/8" | 8 7/8" | 12 1/2" | 28 1/2" |
| B2 | 2 7/8" | 2 7/8" | 4 7/8" | 8 1/4" | 8 1/4" |

Side View

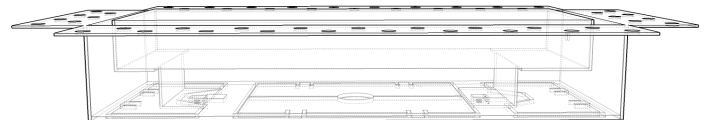

Metric

| DRYWALL PRO | 4"X10" | 4"X12" | 6"X10" | 14 1/4"X10" | 30 1/4"X10" |
|-------------|--------|--------|--------|-------------|-------------|
| A1 | 311mm | 362mm | 311mm | 425mm | 832mm |
| A2 | 158mm | 158mm | 209mm | 317mm | 317mm |
| A3 | 44mm | 44mm | 44mm | 44mm | 44mm |
| B1 | 226mm | 276mm | 226mm | 317mm | 724mm |
| B2 | 73mm | 73mm | 124mm | 209mm | 209mm |

COMPONENTS

Tray: Powder coated surface to be finished with paint or wallpaper. Can slide and remove to access air flow flanges.

Body: Corner bead edge to be fastened to surface and finished with drywall mud.

AIR FLOW CONTROL

Air flow can be controlled at any time after install. Slide tray to access flanges. For optimal airflow open all flanges beyond 90°.

| SIZE & COLOUR | 4"X10" | 4"X12" | 6"X10" | 14 1/4"X10" | 30 1/4"X10" |
|---------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| SATIN WHITE | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |