




Flushmount Pro Installation Guide

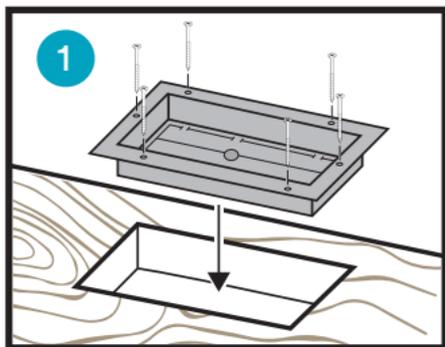


Drop in base piece onto subfloor and fasten with screws in holes.

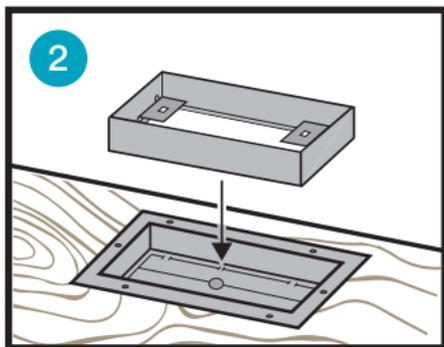


Dry fit body into base.

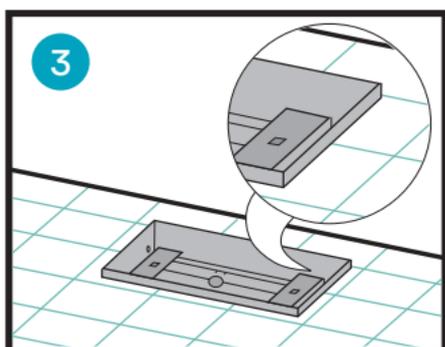


Install surface material on top of base piece so that it is flush to the body.

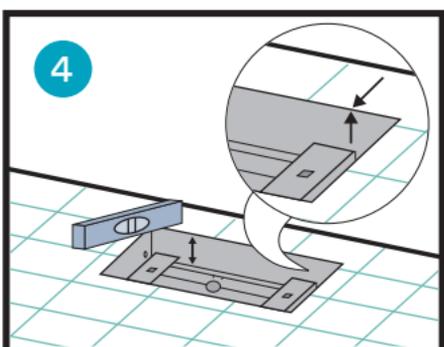


Place body piece into base. With the resistance from the flange, adjust body up and down until it's flush with the top of surface.

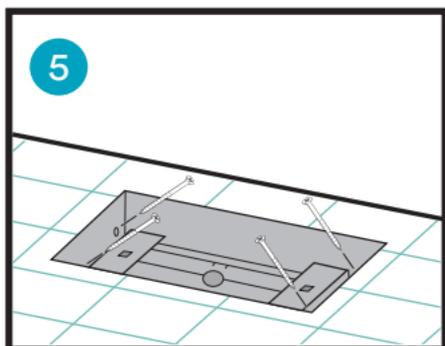


Once adjusted to preferred height, use 4 screws to fasten body to base piece.

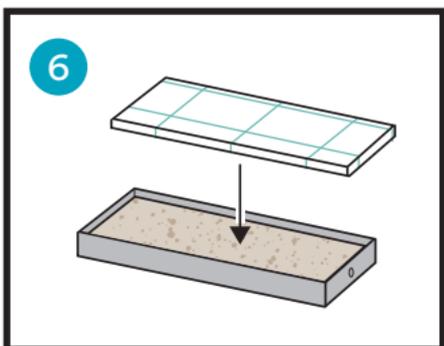

Backfill tray with bonding material and place precut piece of surface material inside tray.

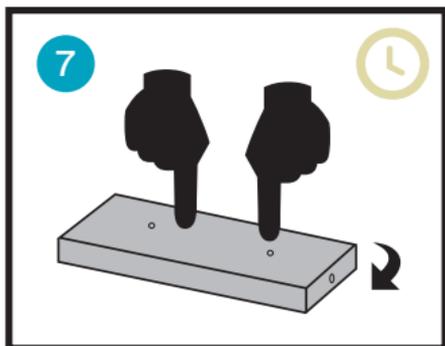

Hold in place and flip tray. Apply even pressure until surface material lies flat with the rim of tray. Leave to cure.

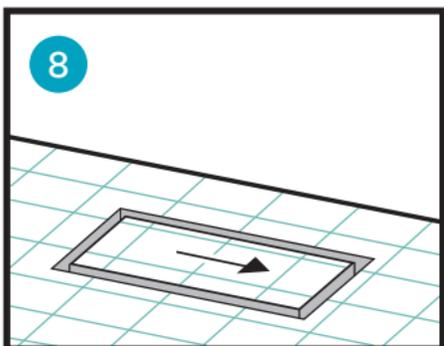

Insert and slide tray in place. Enjoy!

Control Air Flow

Slide to remove tray and adjust flange open and closed. For optimal air flow, push flanges past 90°.

Additional Support

support@ariavent.com / www.ariavent.com