



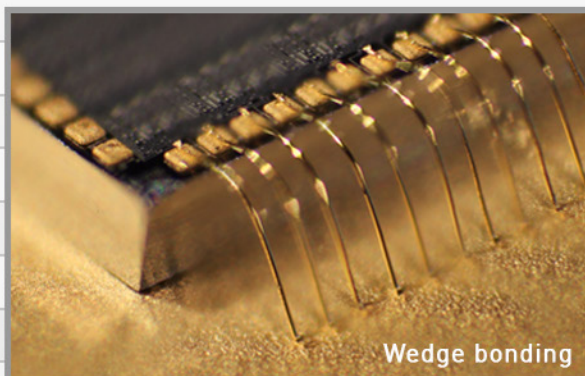

# HB16 Wedge & Ball Bonder

Motorized Z- & Y- Axes

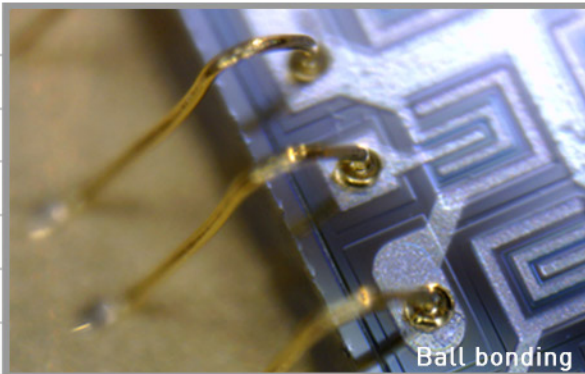

- + Wedge, Ball, Bump and Ribbon bonding
- + 17 $\mu$  to 75 $\mu$  Wire and 25 $\mu$  x 250 $\mu$  Ribbon
- + 6,5" TFT Touch Screen
- + Deep-Access Wedge 16mm / Ball 13mm
- + Bond Arm Length 165mm
- + 100 Program Storage Capacities
- + Motorized Z- & Y-Axis
- + Programmable Loop Profile
- + USB Backup
- + Electronic Ball Size Control
- + Pick & Place Option
- + Pull Tester Option
- + Copper Bonding Option

## HB16 Thermosonic Wire Bonder for Wedge & Ball Bonding

The HB16 is a **Bench Top Size Wire Bonder**, ideal for laboratories, pilot and small scale production lines. **One Bond Head** for bonding in Ball/Wedge or Wedge/Wedge bonding mode. Only tool change necessary. Easy operation with **TFT Touch Screen** and direct access and simple adjustment of all bond parameters.

### Technical Specifications

Bonding Methode	Wedge-Wedge, Ball-Wedge, Ribbon- & Bumb- bonding
Gold wire diameter	17 - 75µm ( 0,7 - 3" )
Aluminium wire diameter	17 - 75µm ( 0,7 - 3" )
Ribbon size	max. 25 x 250µm ( 1 x 9,8" )
Ultrasonic system	63,3 kHz Transducer PLL Control
Ultrasonic power	0 - 10 Watt Output
Bond time	0 - 10 sec.
Bond force	5 - 150 cNm (350cNm option)
Bonding tool	1,58 Ø 19 mm length (0,0624" x 0,750")
Motorised Wire Spool	50,8 mm ( 2" )
Wire termination	Bond Head Tear / Clamp Tear
Wire feed angle	90°
Clamp movement	Motorized, Up / Down
Ball size control	Electronic
Motorized Z travel	17mm (0,67")
Motorized Y travel	10mm (0,39")
Throat depth	165mm ( 6,5" )
Fine Table motion	10mm (0,39")
Mouse ratio	6:1
Temperature controller	up to 250°C +/- 1°C
Electrical Requirements	100 - 240V +/-10% 50/60 Hz 10A max.
Physical Dimensions	680 (27") x 640 (25") x 490mm (19")
Weight	Net 42 kg
Industry Standards	CE standards


### Accessories:



H26 Heater Stage  
with Pick & Place



Bond Starter Kit

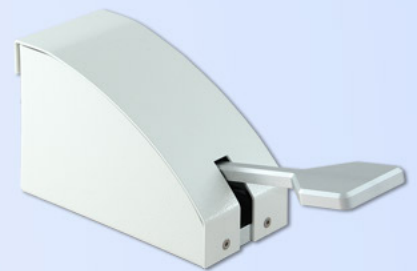

Manual Z-Axis Control



H21 Heater Stage  
100 x 100mm



Spotlight Targeting System



Video Targeting System



TPT Wire Bonder GmbH & Co.KG  
Nussbaumstr. 1 D-85757 Kartsfeld  
Tel.: +49 (0) 8131 / 58604  
www.tpt.de / info@tpt.de

Made in Germany