

Polarshine® 3

Technical data sheet




Product information

Technologically advanced ultra fine polish containing carnauba wax. This formula with antistatic properties gives a hologram free and high gloss finish. Polarshine 3 conserves and protects all paint and lacquer surfaces, top coats and gelcoats.

Product advantages

- Creates a dust repellent surface
- Leaves a long lasting surface protection
- Silicone free

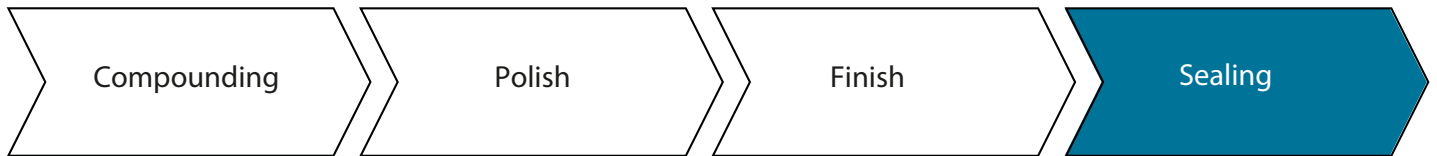

Surfaces

- Clear coats
- Top coats
- Gel coats

Polishing machine

- Random orbital polisher 6000 - 10000 rpm
- Manual application
- Rotary polisher 800 – 1100 rpm

Polishing pad

- Black foam pad
- Microfibre cloth

Product properties

Polish, gloss:



Work instruction

1. Shake or stir polishing compound before use
2. Do not use too much compound at a time. Use a small amount which is consumed on a focused area - less messing and clean up!
3. Clean thoroughly before application
4. Work focused on an area of 40x40 cm at a time
5. Polish until final gloss is achieved
6. Wipe surface with microfibre cloth after application
7. Keep the pads clean, a dirty pad causes deep swirls and scratches

Technical specifications

Density: 0,95 kg/l
 Viscosity: 20,5 Pas
 Colour: White
 pH: 8,5

Distributed by:
 Specialty Marine Solutions, Inc.
 www.SMSDistributors.com * Sales@SMSDistributors.com * 888-385-9026

Storage recommendations

Recommended storage temperature:
 15° - 25° C / 59° - 77° F
 Keep from freezing