
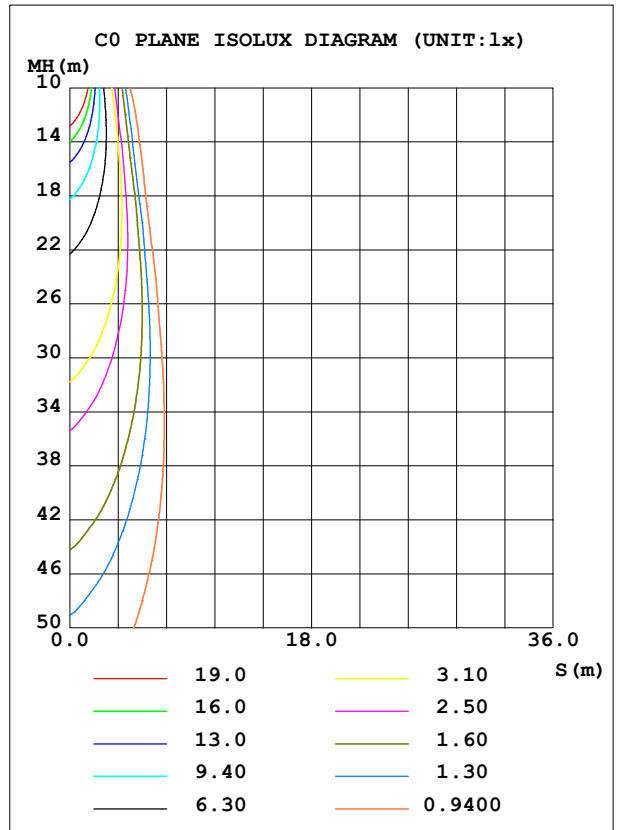


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
Near Scope Downlight-4000K		Imax(cd)	3339	S/MH(C0/180)	0.48
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	0.50
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	702.15	η UP, DN(C0-180)	0.4,34.0
NOMINAL FLUX(lm)	702.152	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.4,65.2
LAMPS INSIDE	1	η up(%)	0.7	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	99.3	CIBSE SHR MAX	0.30

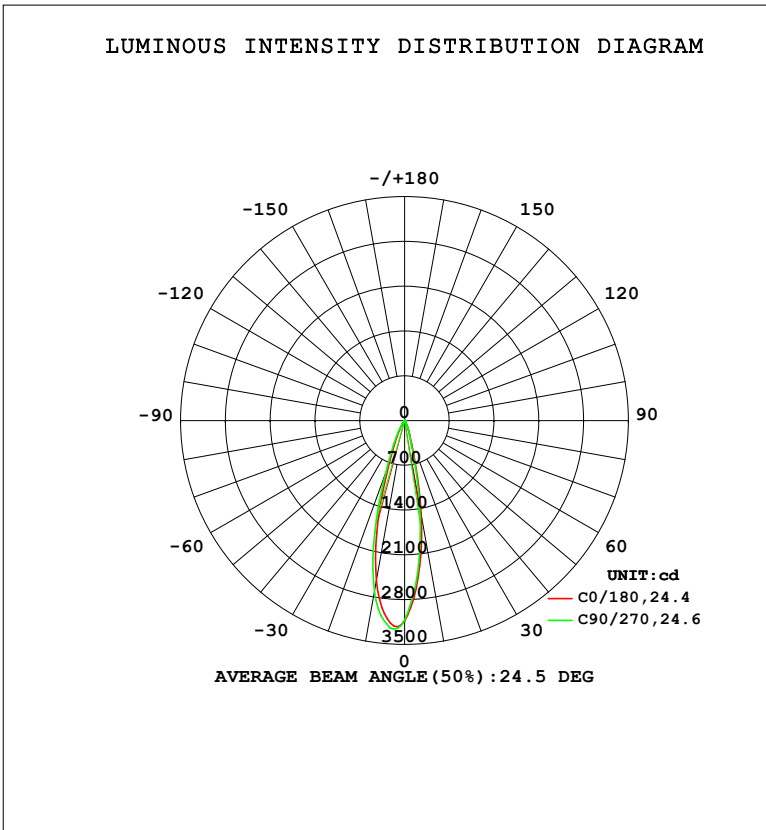

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1508	1221	1370	1887	2550	2983	2717	2078	0- 10	242.0	242.0	34.5,34.5
20	235.3	185.5	210.4	343.2	705.4	1074	857.3	425.3	10- 20	310.3	552.4	78.7,78.7
30	45.21	33.09	38.41	69.04	140.4	224.4	174.8	84.37	20- 30	111.9	664.3	94.6,94.6
40	7.556	6.729	6.747	9.195	15.01	24.65	18.87	10.79	30- 40	26.23	690.5	98.3,98.3
50	2.160	2.159	2.174	2.350	2.953	3.833	3.418	2.354	40- 50	4.561	695.1	99,99
60	0.4965	0.4805	0.5215	0.6493	0.9600	1.309	1.064	0.5948	50- 60	1.427	696.5	99.2,99.2
70	0.1208	0.1094	0.1321	0.1890	0.2271	0.2725	0.2134	0.1271	60- 70	0.3796	696.9	99.2,99.2
80	0.0023	0.0046	0.0160	0.0342	0.0158	0.0408	0.0249	0	70- 80	0.0848	697.0	99.3,99.3
90	0	0	0	0	0	0	0	0	80- 90	0.0047	697.0	99.3,99.3
100	0	0	0	0	0	0	0	0	90-100	0.0009	697.0	99.3,99.3
110	0.0431	0.0568	0.0522	0.0295	0.0023	0.0000	0.0023	0.0046	100-110	0.0144	697.0	99.3,99.3
120	0.1091	0.1341	0.1204	0.0932	0.0501	0.0365	0.0411	0.0661	110-120	0.0499	697.0	99.3,99.3
130	0.2998	0.4019	0.3247	0.1931	0.2690	0.1914	0.2166	0.3738	120-130	0.1423	697.2	99.3,99.3
140	1.174	1.467	1.260	0.7425	1.235	0.9592	1.066	1.537	130-140	0.4938	697.7	99.4,99.4
150	2.946	3.255	2.993	2.304	3.059	2.686	2.820	3.357	140-150	1.245	698.9	99.5,99.5
160	4.116	4.142	4.316	3.888	4.467	4.270	4.331	4.474	150-160	1.682	700.6	99.8,99.8
170	3.590	3.499	3.785	4.026	4.345	4.468	4.389	4.127	160-170	1.203	701.8	99.9,99.9
180	3.487	3.698	3.668	3.700	3.505	3.693	3.675	3.691	170-180	0.3660	702.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 693.57 lm

%lum = 98.8%

%lamp = 98.8%

Conical surface Flux(120deg): 696.49 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

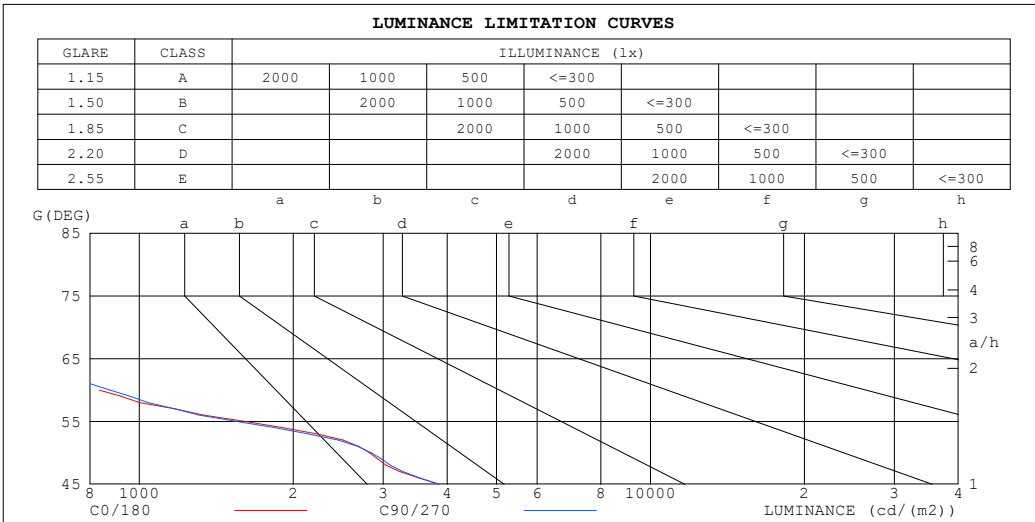

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	11	77
75	148	192
70	297	325
65	507	548
60	834	876
55	1613	1553
50	2824	2842
45	3858	3857

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.137	.078	.025	.131	.075	.024	.118	.068	.022	.106	.061	.020	.095	.055	.018	
2.0	.127	.070	.021	.122	.067	.021	.111	.062	.019	.101	.057	.018	.092	.052	.016	
3.0	.119	.063	.019	.114	.061	.018	.105	.057	.017	.097	.053	.016	.089	.050	.015	
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.086	.047	.014	
5.0	.105	.054	.016	.102	.052	.015	.095	.050	.015	.089	.047	.014	.084	.045	.013	
6.0	.100	.050	.014	.097	.049	.014	.091	.047	.014	.086	.045	.013	.081	.043	.013	
7.0	.095	.047	.013	.092	.046	.013	.087	.044	.013	.083	.042	.012	.078	.041	.012	
8.0	.090	.044	.012	.088	.043	.012	.084	.042	.012	.080	.040	.012	.076	.039	.011	
9.0	.086	.042	.012	.084	.041	.012	.080	.040	.011	.077	.039	.011	.073	.037	.011	
10.0	.083	.040	.011	.081	.039	.011	.077	.038	.011	.074	.037	.010	.071	.036	.010	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.114	.114	.114	.066	.066	.066	.021	.021	.021	
1.0	.174	.163	.154	.149	.140	.132	.102	.096	.091	.059	.056	.053	.019	.018	.017	
2.0	.156	.138	.124	.134	.119	.107	.092	.082	.075	.053	.048	.044	.017	.016	.014	
3.0	.141	.119	.101	.121	.103	.088	.083	.071	.062	.048	.042	.036	.015	.014	.012	
4.0	.129	.104	.085	.110	.090	.073	.076	.062	.052	.044	.037	.031	.014	.012	.010	
5.0	.118	.091	.072	.102	.079	.062	.070	.055	.044	.041	.032	.026	.013	.011	.009	
6.0	.109	.081	.061	.094	.071	.053	.065	.049	.038	.038	.029	.022	.012	.009	.007	
7.0	.102	.073	.053	.088	.064	.046	.061	.045	.033	.035	.026	.020	.011	.009	.006	
8.0	.095	.067	.047	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
9.0	.090	.061	.041	.077	.053	.036	.054	.037	.026	.031	.022	.015	.010	.007	.005	
10.0	.085	.056	.037	.073	.049	.032	.051	.034	.023	.030	.020	.014	.010	.007	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.8	6.5	6.0	6.6	6.8	5.2	5.9	5.5	6.1	6.2
3H	5.7	6.3	5.9	6.5	6.7	5.1	5.7	5.4	5.9	6.1
4H	5.6	6.2	5.9	6.4	6.6	5.0	5.6	5.3	5.8	6.1
6H	5.5	6.0	5.8	6.3	6.5	5.0	5.5	5.3	5.7	6.0
8H	5.5	6.0	5.8	6.2	6.5	4.9	5.4	5.2	5.7	6.0
12H	5.4	5.9	5.7	6.2	6.5	4.9	5.4	5.2	5.6	5.9
4H 2H	5.6	6.2	5.9	6.4	6.6	5.1	5.6	5.3	5.9	6.1
3H	5.5	6.0	5.8	6.2	6.5	4.9	5.4	5.2	5.7	6.0
4H	5.4	5.8	5.7	6.1	6.4	4.8	5.3	5.2	5.6	5.9
6H	5.3	5.7	5.6	6.0	6.4	4.7	5.1	5.1	5.5	5.8
8H	5.2	5.6	5.6	5.9	6.3	4.7	5.0	5.1	5.4	5.8
12H	5.1	5.5	5.6	5.9	6.3	4.6	5.0	5.0	5.3	5.7
8H 4H	5.2	5.6	5.6	5.9	6.3	4.7	5.0	5.1	5.4	5.8
6H	5.1	5.4	5.5	5.8	6.2	4.5	4.9	5.0	5.3	5.7
8H	5.0	5.3	5.5	5.7	6.2	4.5	4.8	4.9	5.2	5.6
12H	5.0	5.2	5.4	5.7	6.1	4.4	4.7	4.9	5.1	5.6
12H 4H	5.1	5.5	5.6	5.9	6.3	4.6	5.0	5.0	5.3	5.7
6H	5.0	5.3	5.5	5.7	6.2	4.5	4.8	4.9	5.2	5.6
8H	5.0	5.2	5.4	5.7	6.1	4.4	4.7	4.9	5.1	5.6

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 3.5 / - 8.1	+ 3.3 / - 7.3
1.5H	+ 5.1 / - 6.2	+ 4.7 / - 5.8
2.0H	+ 4.2 / - 6.9	+ 4.2 / - 6.7

CIE Pub.117, 702.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)
 Area: 0.00119 m2

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Temperature:25.3℃	Humidity:65.0%
Operators:001	Test Distance:7.580m [K=1.0000]
Test Date:2023-09-05	Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:001
 Test Date:2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

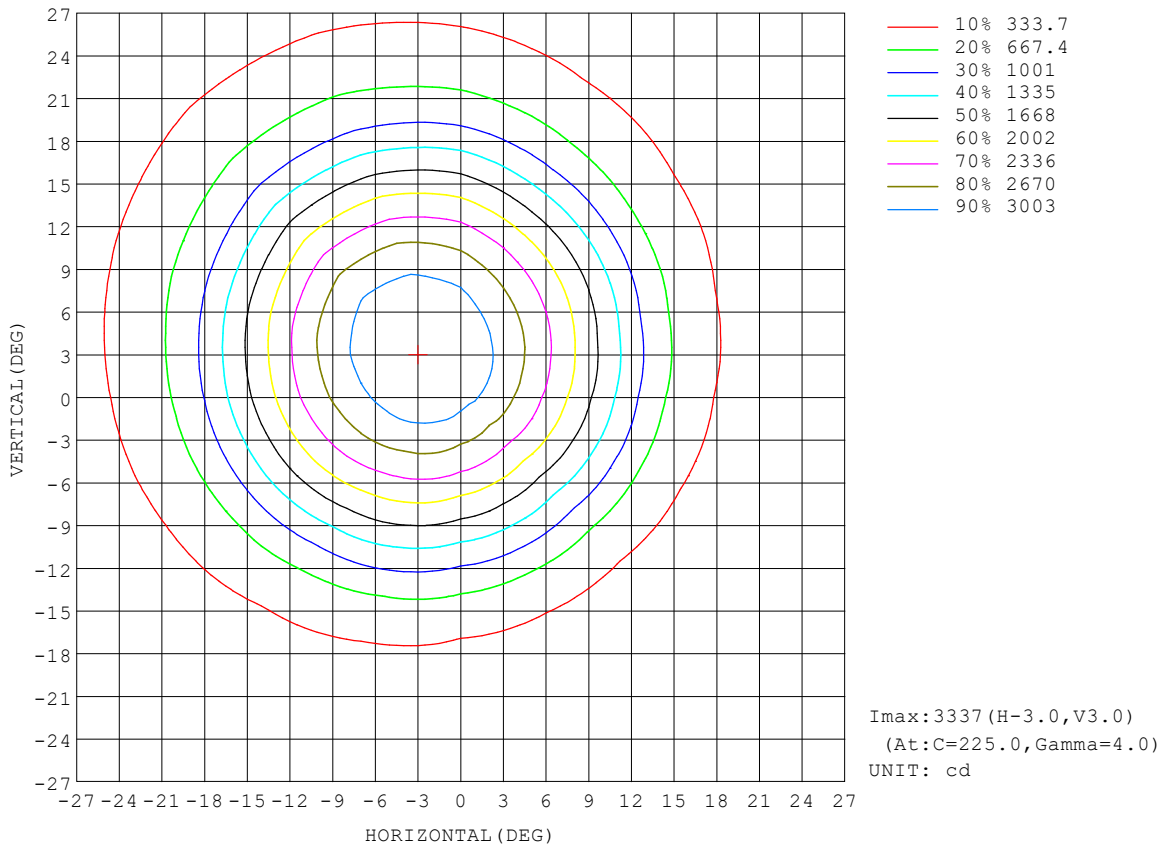


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: 001
 Test Date: 2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

Flux out:357.0 lm

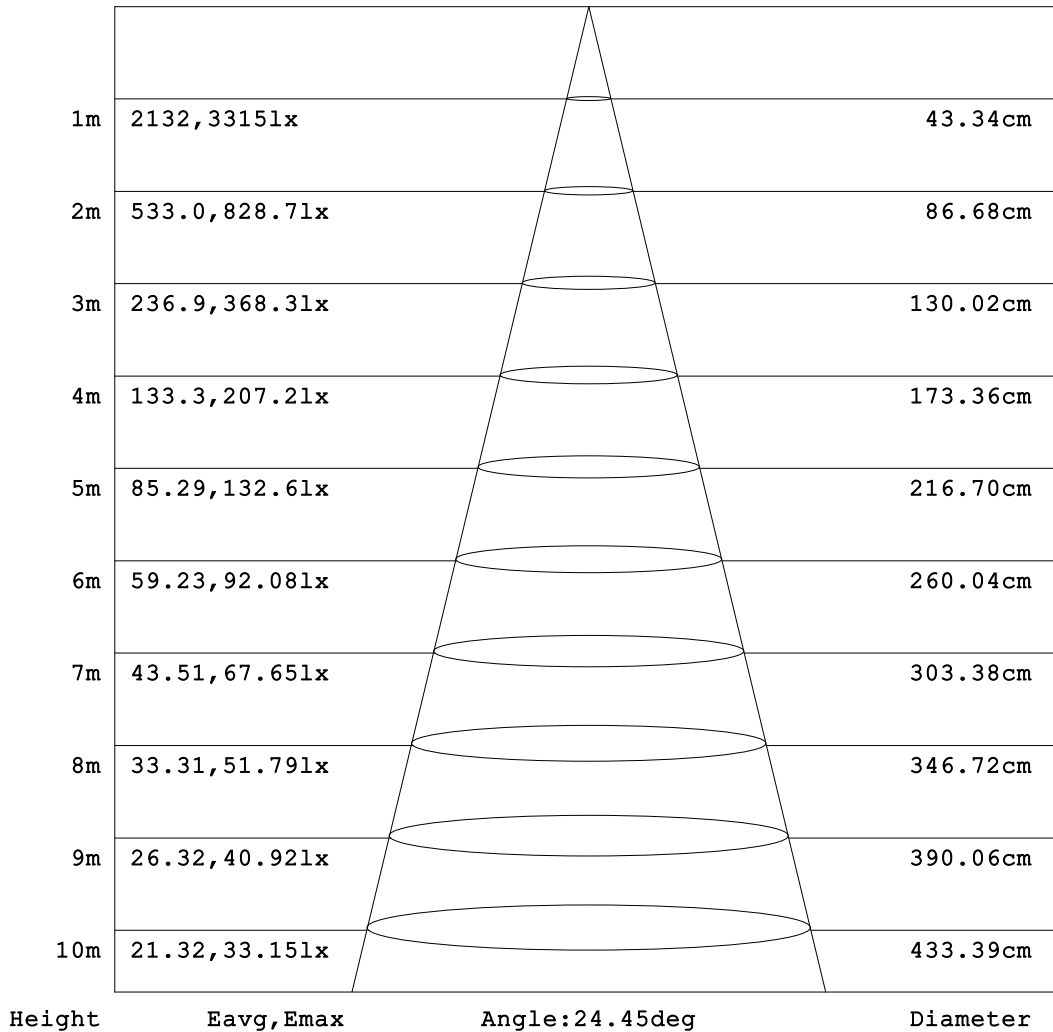


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:001
Test Date:2023-09-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:7.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

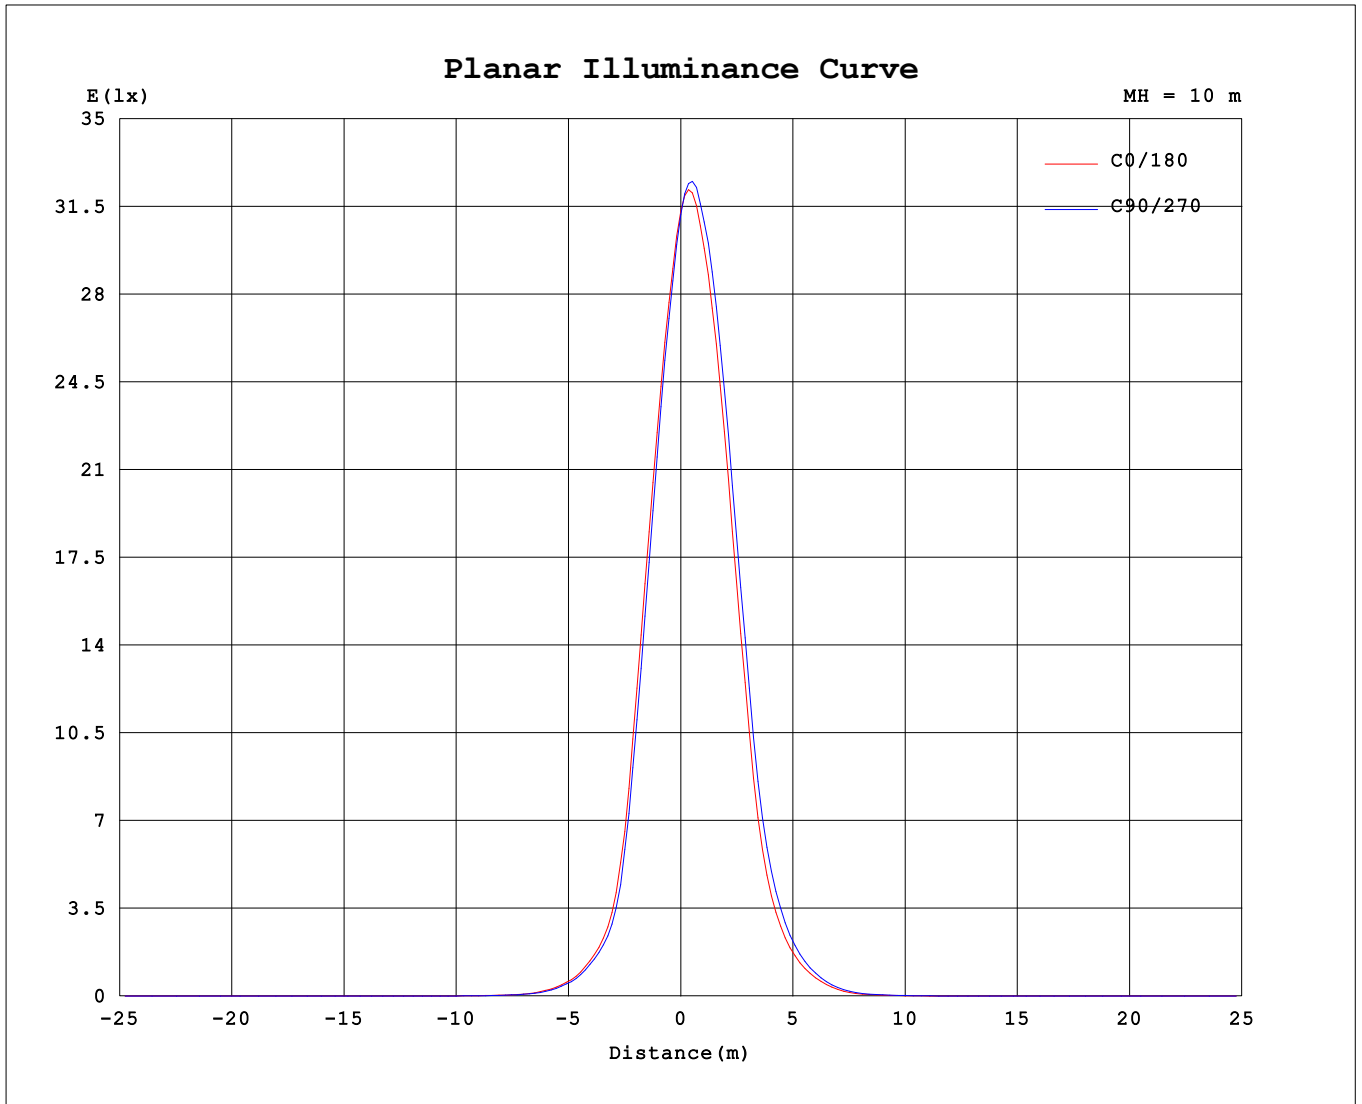

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: 001
 Test Date: 2023-09-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 7.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.63V I:0.0787A P:10.866W PF:0.6255 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:702.152x1 lm		
NAME: Near Scope Downlight-4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: VJC Lighting	SUR.: 39	Shielding Angle:

Table--1

UNIT: cd

C (DEG)\ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3131	3134	3113	3127	3119	3134	3135	3137	3131	3134	3113	3127	3119	3134	3135	3137			
5	2460	2351	2263	2302	2378	2547	2726	2942	3108	3257	3330	3305	3197	3018	2827	2625			
10	1508	1337	1221	1268	1370	1611	1887	2233	2550	2818	2983	2931	2717	2391	2078	1747			
15	592	465	404	427	494	672	906	1262	1606	1910	2113	2039	1809	1436	1093	773			
20	235	202	186	191	210	261	343	504	705	912	1074	1021	857	621	425	301			
25	107	91.6	82.4	85.6	95.0	120	161	227	313	414	500	483	393	278	197	138			
30	45.2	37.5	33.1	34.1	38.4	50.3	69.0	99.4	140	185	224	216	175	120	84.4	59.0			
35	16.2	14.5	13.5	13.4	14.0	17.1	22.2	34.0	49.5	70.6	88.1	82.4	63.6	41.9	28.0	19.5			
40	7.56	7.06	6.73	6.53	6.75	7.76	9.20	11.9	15.0	19.6	24.6	23.9	18.9	14.0	10.8	8.37			
45	3.25	3.19	3.18	3.24	3.25	3.51	4.04	5.18	6.29	8.11	10.0	9.51	7.93	5.76	4.48	3.61			
50	2.16	2.15	2.16	2.17	2.17	2.22	2.35	2.66	2.95	3.34	3.83	3.87	3.42	2.74	2.35	2.19			
55	1.10	0.99	0.95	0.97	1.06	1.27	1.56	1.85	1.97	2.11	2.17	2.13	2.05	1.87	1.61	1.27			
60	0.50	0.46	0.48	0.48	0.52	0.55	0.65	0.80	0.96	1.17	1.31	1.19	1.06	0.78	0.59	0.52			
65	0.26	0.22	0.24	0.23	0.28	0.29	0.36	0.39	0.45	0.52	0.53	0.52	0.44	0.37	0.29	0.26			
70	0.12	0.09	0.11	0.09	0.13	0.13	0.19	0.20	0.23	0.28	0.27	0.27	0.21	0.19	0.13	0.12			
75	0.05	0.02	0.04	0.02	0.06	0.05	0.09	0.08	0.10	0.14	0.12	0.14	0.09	0.09	0.04	0.05			
80	0.00	0.00	0.00	0.00	0.02	0.00	0.03	0.02	0.02	0.06	0.04	0.06	0.02	0.03	0.00	0.01			
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.02	0.00	0.02	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.01	0.04	0.03	0.05	0.02	0.03	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.04	0.07	0.06	0.08	0.05	0.06	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.08	0.11	0.09	0.11	0.08	0.10	0.06	0.07	0.02	0.00	0.01	0.00	0.01	0.00	0.02	0.01			
120	0.11	0.15	0.13	0.16	0.12	0.13	0.09	0.10	0.05	0.01	0.04	0.01	0.04	0.03	0.07	0.07			
125	0.17	0.23	0.22	0.23	0.18	0.17	0.13	0.14	0.12	0.07	0.08	0.07	0.10	0.10	0.16	0.20			
130	0.30	0.38	0.40	0.41	0.32	0.27	0.19	0.18	0.27	0.19	0.19	0.17	0.22	0.26	0.37	0.50			
135	0.60	0.74	0.79	0.77	0.64	0.50	0.36	0.30	0.62	0.49	0.45	0.44	0.51	0.63	0.81	1.05			
140	1.17	1.37	1.47	1.40	1.26	0.97	0.74	0.59	1.23	1.05	0.96	0.96	1.07	1.27	1.54	1.86			
145	2.01	2.23	2.35	2.27	2.06	1.74	1.42	1.15	2.10	1.88	1.75	1.76	1.89	2.14	2.44	2.80			
150	2.95	3.15	3.26	3.19	2.99	2.66	2.30	1.97	3.06	2.83	2.69	2.70	2.82	3.07	3.36	3.66			
155	3.74	3.89	3.94	3.91	3.90	3.52	3.25	2.90	3.91	3.70	3.58	3.59	3.70	3.88	4.09	4.27			
160	4.12	4.14	4.14	4.18	4.32	4.09	3.89	3.70	4.47	4.33	4.27	4.25	4.33	4.40	4.47	4.49			
165	4.00	3.90	3.94	4.00	4.13	4.16	4.14	4.11	4.58	4.58	4.57	4.56	4.55	4.52	4.44	4.37			
170	3.59	3.48	3.50	3.62	3.79	3.91	4.03	4.07	4.35	4.47	4.47	4.47	4.39	4.29	4.13	4.03			
175	3.30	3.29	3.35	3.42	3.50	3.62	3.77	3.83	3.87	4.05	4.12	4.09	4.00	3.94	3.81	3.69			
180	3.49	3.58	3.70	3.68	3.67	3.67	3.70	3.65	3.50	3.60	3.69	3.68	3.68	3.68	3.69	3.64			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:001
 Test Date:2023-09-05
 γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.456
 Humidity:65.0%
 Test Distance:7.580m [K=1.0000]
 Remarks: