



Plasma &

Reactive Gas
Solutions

WWW.MKSINST.COM

DI-SOLVER CO₂

COMPACT SYSTEM TO DELIVER CARBONATED ULTRAPURE WATER

The DI-SOLVER CO₂ is used in single substrate cleaning tools for rinsing steps to prevent ESD effects and/or corrosion by creating UPW with precisely defined conductivity. It is a compact system for tool integration, providing conductive DI-CO₂ water (carbonated ultrapure water) with closed loop controlled conductivity. The conductivity is kept at a constant value under changing flow conditions by control of the CO₂ concentration in the DI-CO₂ water.

Several process steps in the semiconductor industry require de-ionized (DI) water with precisely defined conductivity. The DI-SOLVER CO₂ meets this demand.


Features & Benefits

- Closed-loop conductivity control
- Small, compact module for integration
- Low cost of ownership, no CO₂ and no UPW consumption at process pauses
- Maximum conductivity at physical limits
- Highest accuracy
- Flow is allowed to change between 0.5 – 90 L/min to keep conductivity stable (up to ± 3%)
- Maintenance-free contactor



Specifications and Ordering Information

Specification	Description
Conductivity / Resistivity Range for System Pressure ≥ 2 bar_g	Min. conductivity 5 $\mu\text{S/cm}$, max. resistivity 200 $\text{k}\Omega\cdot\text{cm}$ Max. conductivity 50 $\mu\text{S/cm}$, min resistivity 20 $\text{k}\Omega\cdot\text{cm}$
DI-CO₂ Flow Rate	Min. total flow: 0.5 L/min (0.1 gpm) / Max. total flow: 90 L/min (15.8 gpm)
Control Accuracy for Conductivity	Typical maximum deviation from setpoint: Steady state flow: $\pm 3\%$ Fluctuating flow: $\pm 10\%$ for flow changes < 4 L/min per sec
DI-CO₂ Outlet Pressure	1.0 - 3.0 bar _g (0.1 - 0.3 MPa _g , 14.5 - 43.5 psi _g), depending on UPW supply pressure
UPW Temperature Range	20 - 50 °C
Plumbing Materials	Liquid contacted surfaces: PFA, PVDF
Communication	Binary in/out (dry contacts), RS232, analog out, USB
Cabinet Material, Dimensions	PVDF or C-PVC or FRPP, approx. 386 mm x 650 mm x 232 (WxHxD)
Weight	Approx. 17.3 kg (empty) / 23.3 kg (filled with water)
Electrical Supply	24 VDC/ 60 W

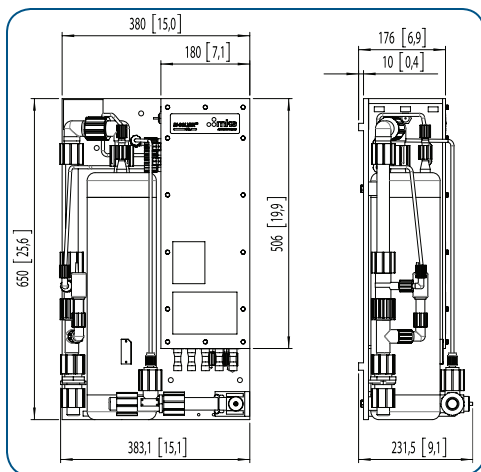

Dimensional Drawing – Flaretek® Fittings

Note: Unless otherwise specified, dimensions are nominal values in millimeters (inches referenced).

Ordering Code Example: 16-001A-BCDEF	Code
DI-SOLVER CO₂	16-001
Conductivity Range (A-)	
Conductivity Range 5 - 40 $\mu\text{S/cm}$ (200 - 25 $\text{k}\Omega\cdot\text{cm}$)	0-
Conductivity Measurement (B)	
Integrated Sensor	0
External Sensor	1
Connection (C)	
Super 300 Type Pillar Fitting	0
Flaretek®	1
Housing Material (D)	
PVDF	0
C-PVC	1
FRPP	2
Currently Not Defined (E)	
Standard	0
Customer Specific Features (F)	
Standard	0



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in USA)
Web: www.mksinst.com

MKS Instruments, Inc. Plasma & Reactive Gas Solutions

90 Industrial Way
Wilmington, MA 01887
Tel: 978.284.4000

MKS Instruments Deutschland GmbH Plasma & Reactive Gas Solutions

Wattstr. 11-13
13355 Berlin, Germany
Tel: +49.30.464.0030