

LED Loading Dock Lighting

LED Loading Dock Light Heads

YouLumi Series LED loading dock lights require 94% less electricity, far less energy than traditional fixtures while accomplishing the same lighting task. It combine energy savings with maintenance free longevity and quality. Low maintenance costs coupled with our advanced thermal management techniques ensure the YouLumi Series will perform over time where many competing offerings will not.

- YouLumi Series fixtures are perfect for industrial, manufacturing and warehousing
- Designed to illuminate tractor trailers up to 53 ft for loading and unloading
- Excellent for any application requiring long life and low maintenance costs
- 50,000 hrs LED life for using wet locations



Heavy Duty LED Lamp Head (Frosted glass)

Frosted tempered glass is Better anti glare, more comfortable to use



Virtually indestructible! The Dock light is designed for the most demanding environments including wet and damp locations.

- 4 different wattages to suit your needs.
- 94% less energy than a traditional incandescent bulb, yet provides almost 1800 ~ 6000 lumens of light
- IP65 rated light head; dust tight and able to withstand water spray
- IK08 rugged cast aluminum housing and thick tempered glass, with heavy duty crash-proof lamp cover prevents from accidental impact.
- Yellow powder coated for high visibility and excellent corrosion resistance
- The manual adjustment screws' design lets you easily adjust the angle of the light head without using tools
- You can not only control the light by a wall switch, but also by manual control thanks to the switch on the back of the light
- available for 120V, 240V & low voltage applications
- ETL, CE Certification
- 5-Year Warranty

Heavy Duty LED Lamp Head (Clear glass)

Clean tempered glass is Perfect optical cup design, Better focus, Farther away



LED Loading Dock Light Arms (IP65 waterproof version)

YouLumi LED Loading Dock Light is a wet location task light that is ideal for outdoor use or in wet indoor environments. Heavy Duty LED dock head delivers an instant-on, bright, uniform light. Powered by 20~50W, it offers an 89% energy savings over an incandescent head using a 150~750W lamp.



Single Strut Swing Arm (A1 24in)

The A1 (24inch) series is an economical lighting solution for low to mid volume loading docks.

Single Strut Swing Arm (A1 40in ; A2 40in/60in)

The A1 (40inch) , A2 (40inch / 60inch) series is an economical lighting solution for low to mid volume loading docks. The arm features a hinge that allows both vertical and horizontal adjustment of the arm.




Double Strut Arm (B1 40in/60in)

The B1 (40inch / 60inch) series is the standard in loading dock light arms. Dual struts give this arm the strength to survive in the busiest and most demanding warehouses.

Double Strut Swing Arm (C1 40in/60in)

The C1 (40inch / 60inch) series provides the double strut design of the A2 series along with the vertical and horizontal adjustability of the B1 series for a great combination of strength and versatility.

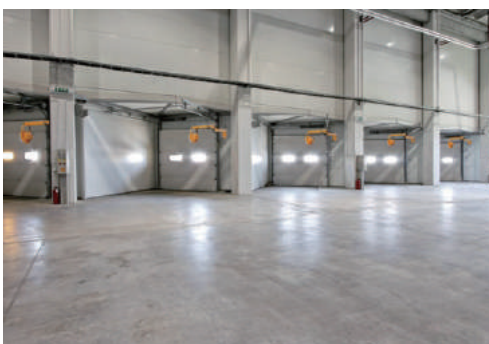

LED Loading Dock Light Arms (IP65 connector version)



Single Strut Swing Arm (A1 24inch)






Single Strut Swing Arm (A2 40inch)



Single Strut Swing Arm (A1 40inch)



Single Strut Swing Arm (A2 60inch)

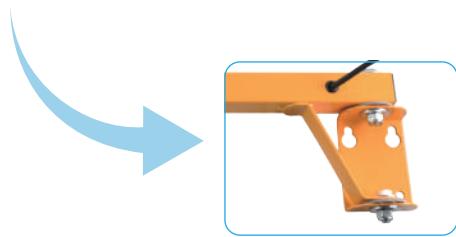

Double Strut Arm (B1 40inch)




Double Strut Swing Arm (C1 40inch)



Double Strut Arm (B1 60inch)



Double Strut Swing Arm (C1 60inch)

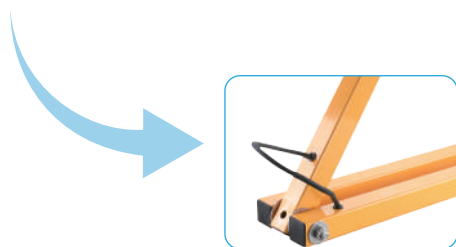

TECHNICAL SPECIFICATIONS

Model No.	Power (W) ±5%	Lumens ±10%	CCT.	Dimensions (ϕ xH)	ARM	Connector	Certificate
YL-DLA01-20W-M-XXK-2R-S	20W	1800-2400	2700-6500K	ϕ 155*173mm ϕ 6.10 "x6.81"	A1 (24in/40in)	IP65 waterproof connector	ETL,CE
YL-DLA01-30W-M-XXK-2R-S	30W	2700-3600			A2 (40in/60in)		ETL,CE
YL-DLA01-40W-M-XXK-2R-S	40W	3600-4800		ϕ 200*180mm ϕ 7.87 "x7.09"	B1 (40in/60in)		ETL,CE
YL-DLA01-50W-M-XXK-2R-S	50W	4500-6000			C1 (40in/60in)		ETL,CE