

# **ALL FITTING INSTRUCTIONS**

**Please scroll down for**

**-One piece covers**

**-Two piece covers**

**-Rear covers**

**-Maintenance and  
cleaning instructions**

# FRONT FITTING ONE PIECE

Is your front seat cover in  
one piece?

Use this fitting instruction



Fitting Time  
20 Minutes.



## FITTING INSTRUCTIONS

Part Number: **XXX-XXXXX** Model: **XXX**  
Seatcover Variant: **XXX**

Thank you for purchasing a RB Genuine Accessory.  
For proper installation and use of this product please read this publication carefully.  
Keep this publication for reference when maintenance is required.

### Attention

#### Disclaimer

This document provides additional information that facilitates installation work and care.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact the Razorback team or your dealer for clarification.

#### Safety Notes.


- Check that all installation work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.



#### Parts Supplied.



Headrest Cover x2



Seat Cover x2

#### Important



Pictures shown in the following steps are for illustrative purposes only. Steps apply to both driver and passenger side seats.


**RAZORBACK4X4.COM.AU**

6 West Court, Coolaroo, VIC 3048


## HEADREST REMOVAL

1. Remove the headrest by pressing the release button and sliding the headrest upwards (Fig 1). While fitting the Ranger, you will need to push a pin into the small hole at the base of the headrest pole (Fig 2).

(Fig 1)




(Fig 2)

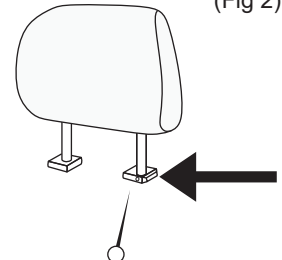


## BACKREST COVER

1. **IMPORTANT:** Check care label inside the seat base, it will identify driver and passenger side (Fig 3).

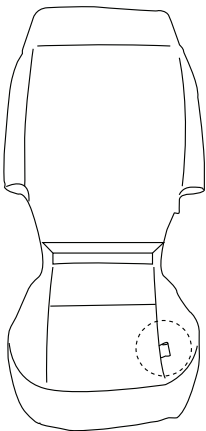


(Fig 3)

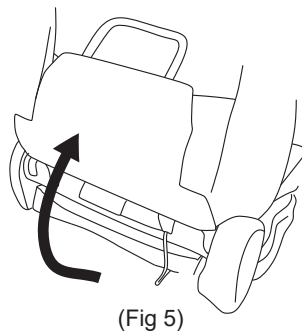

(Fig 5)

2. Lift the fabric flap from behind and/or beneath the front seats if applicable (Fig 5).

3. Ensure the airbag tag is facing outward from the centre of the car as this will ensure correct fitment (Fig 4).

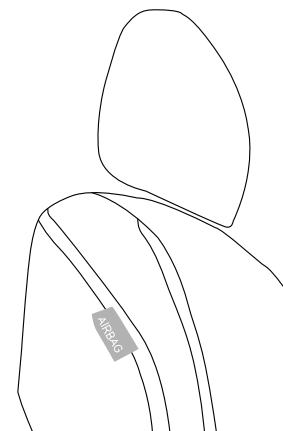


(Fig 4)

### **WARNING:**


Improper installation of this component will result in failing of car safety systems. Ensure proper installation.\*1

4. Turn seat cover inside out, align holes to the headrest points, and slide the backrest cover from both sides over seat backrest (Fig 6).

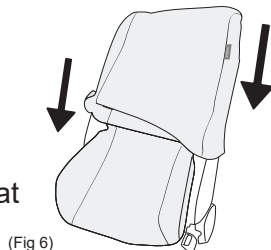

(Fig 6)

5. Using your fingers, push the backrest cover under headrest guide mechanisms to hold the backrest cover in place and ensure it is centrally aligned (Fig 7).




(Fig 7)


\*1 See warnings and maintenance document.

## CUSHION COVER

1. Feed the central seatcover rod in between the seat backrest and base.

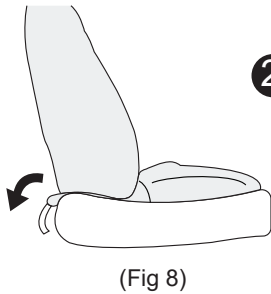


2. Roll cushion cover over the seat base and align to seat contours. From the back of the seat, pull central rod through gap in seat backrest and base to hang out the back (Fig 8).

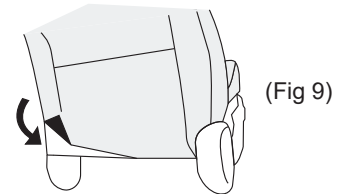

3. From the rear of the seat, gently pull the soft fabric tapes (if applicable) through and connect to the hard hook tapes behind the backrest cover (Fig 9). Do not pull velcro tabs, as they are not engineered for this purpose.
4. Where possible, tuck the sides of the base cover in-between the seat base and plastic trimming surrounding the base.

## HEADREST COVER

1. Turn the headrest covers inside out and roll the covers down on top headrest. Proceed to wrap the headrest cover over the headrest by rolling it down evenly. To make sure the headrest cover is being fitted correctly, ensure the seams are aligned before rolling it down (Fig 10) .
2. Re-insert the headrest to the seat.
3. Repeat steps 1-9 for remaining side cover.

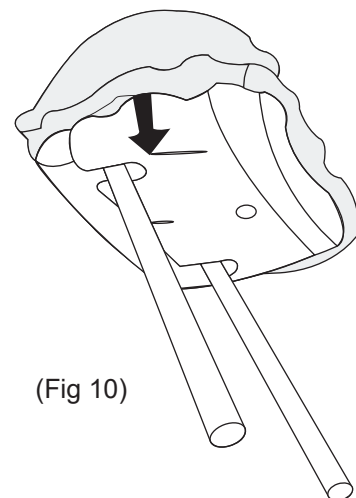



# **FRONT FITTING TWO PIECES**

**Is your front seat cover in  
two pieces  
(back & cushion)?**

**Use this fitting instruction**



Fitting Time  
20 Minutes.



## FITTING INSTRUCTIONS

Part Number: **XXX** Model: **XXX**  
Seatcover Variant: **Neoprene Fronts**

Thank you for purchasing a RB Genuine Accessory.  
For proper installation and use of this product please read this publication carefully.  
Keep this publication for reference when maintenance is required.

### Attention

#### Disclaimer

This document provides additional information that facilitates installation work and care.


- Failure to follow these instructions not only prevents the product from working properly but may lead to trouble with the vehicle. Be sure to follow all instructions carefully.
- If there is anything unclear about the installation, handling and/or usage of the product, contact the Razorback team or your dealer for clarification.

#### Safety Notes.


- Check that all installation work practices comply with safety standards.
- Please wear appropriate clothing and use safety equipment.




#### Parts Supplied.



Headrest Cover x2



Backrest Cover x2



Cushion Cover x2

#### Important




Pictures shown in the following steps are for illustrative purposes only. Steps apply to both driver and passenger side seats.

**RAZORBACK4X4.COM.AU**

6 West Court, Coolaroo, VIC 3048

## HEADREST REMOVAL


1. Remove the headrest by pressing the release button and sliding the headrest upwards (Fig 1).



(Fig 1)


## CUSHION COVER

1. Check care label inside the seat base to identify driver and passenger side (Fig 2).

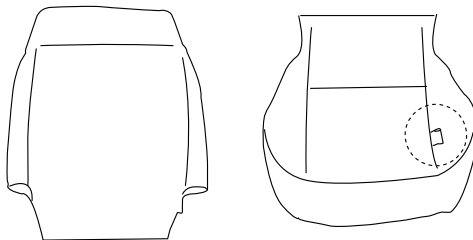


(Fig 2)

2. Turn base cover inside out, place and align over seat cushion (Fig 3).

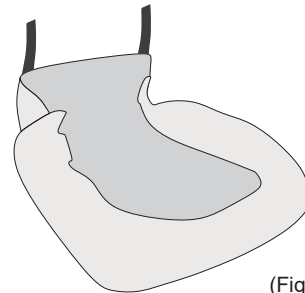


(Fig 3)

3. Set seat incline to as far forward as possible and feed the back of the cover in between the seat backrest and base (Fig 4).

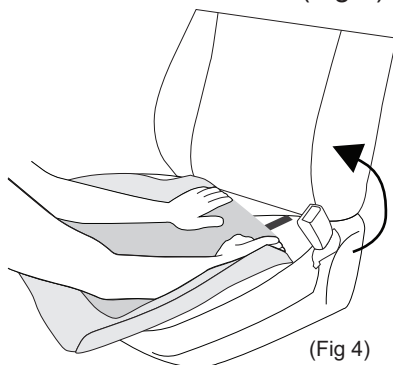

(Fig 4)

4. Roll base part of the cover over the seat base and align to seat contours (Fig 5).

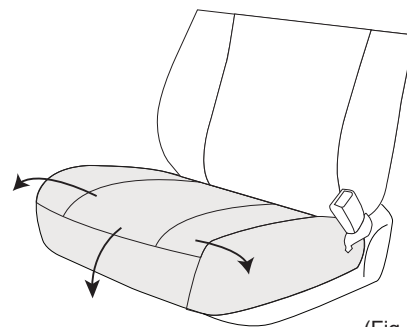


(Fig 5)




## BACKREST COVER

1. Slide backrest cover down evenly from both sides over seat backrest (Fig 6).

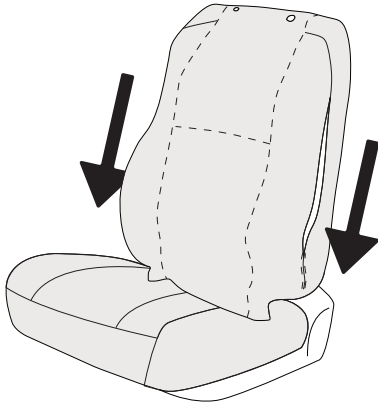

(Fig 6)

2. Push bottom of backrest cover through in between the backrest and the base. From the back of the seat, pull middle part of the backrest cover through in between the seat backrest and base to hang out the back (Fig 7).

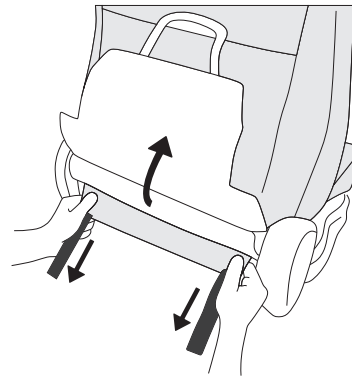


(Fig 7)

**DO NO PULL FROM VELCRO.**

Use fingers to hold from fabric securely and finess the cover through the gap.

## HEADREST COVER


1. Turn the headrest covers inside out and lay the cover on top of the headrest. Proceed to wrap the headrest cover over the headrest by rolling it down evenly. To make sure the headrest cover is being fitted correctly, ensure the seams are aligned before rolling it down (Fig 8).
2. Re-install the headrest to the seat.
3. Repeat steps 1-9 for remaining side cover.

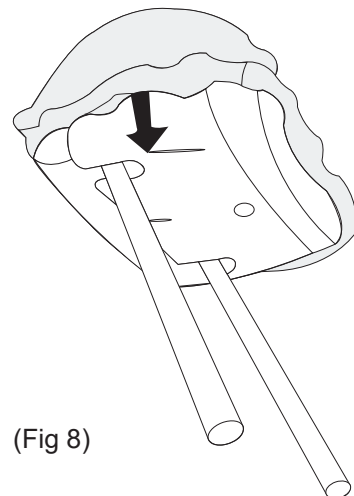

(Fig 8)


## CUSHION COVER

**1**

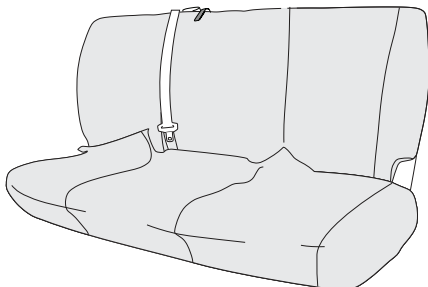

Place the cushion cover over the seat base. Align to the seats contours and roll around the edge of the seat.


**2**

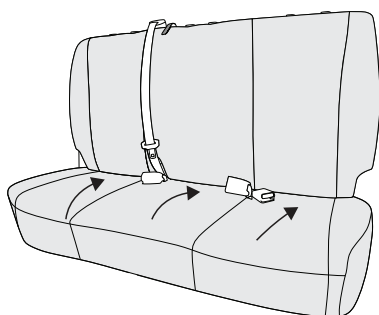

Push the middle part of the base cover through in between the seat base and backrest. Then fit the cover to the seat base and attach the hook & loop strips to the carpet under the seat.

## HEADREST COVER


**1**

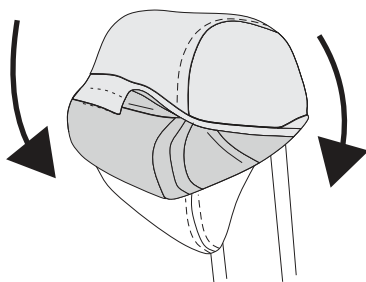

With headrest cover turned inside out:  
Starting from the top, line the seams up then roll cover down slowly.

Note: The headrest covers are tight, be careful not to force and stretch the cover

**2**

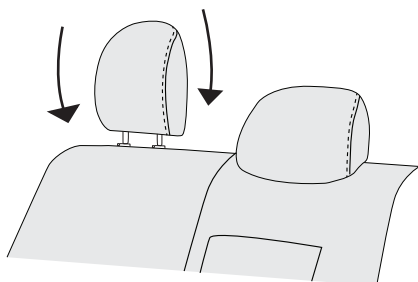

Re-install 3 headrests to the seat backrest and check it is secure.



## SAFETY AND MAINTAINANCE DOCUMENT

### SAFETY INFORMATION

#### WARNING

\*1 Razorback 4x4 pass strict Australian Design Rules safety testing and standards. If car seat covers are not installed exactly as instructed Razorback 4x4 accepts no liability for any injuries or damages that occur as a result of improper fitment.



- Do not fit car seat covers to wrong seats or incorrect vehicle.
- Only install car seat covers on clean car seats.
- If you encounter any issues with your installation, contact the Razorback 4x4 team for assistance.



Operation, maintenance, and service requirements are covered in the instruction manual. Read the entire instruction manual before fitting seats.



Do not expose product to naked flames.



Do not use any sharp implements when installing seat covers, only hands.



The seatcovers are UV rated, however try to avoid prolonged sun exposure to extend product life.



Do not spray chemicals or solvents on or near seat covers.

## **MAINTAINANCE AND CLEANING INFORMATION**

### **Avoid Machine Washing Razorback Products**

Razorback seat covers are impregnated with specialised dyes and solutions. When machine washed, particularly at temperature, this will reduce the functionality of these material properties. For the longevity of your purchase, **DO NOT MACHINE WASH**. Please follow the below instructions to ensure the product's longevity.

The process for cleaning your Razorback 4x4 product:

- Vacuum all surfaces paying particular attention to the seams to remove all loose dust, dirt and grime.
- Use a damp cloth (neoprene) or sponge (canvas) to wipe the surface, removing any remaining dust, dirt and grime.
- With a new clean cloth, wipe down all surfaces to ensure that it is sufficiently dry.



It is essential to regularly clean your covers using the above methods to ensure that they do not become compromised through wear.

**DO NOT DRYCLEAN.** Due to the dyes and solutions used during this product's manufacture this cleaning process will destroy the product.

Depending on care taken during cleaning process, the product surface may fade slightly after cleaning.