PRODUCI

CONTENTS

ABOUT US

01 WHO WE ARE 02 WHAT WE DO 03 PRODUCT FEATURES **MORE FEATURES** 04

PAYMENT & DELIVERY 05

THE BASICS

06-07 FABRIC & COLOURS

08 **OPERATION**

AUTOMATION 09

OUR PRODUCTS

COMPARE PRODUCTS

PIVOT ARM AWNING 11

THE RETRACTABLE 12

13 TWIST LOCK CHANNEL

STRAIGHT DROP CRANK 14

15 **HEAVY DUTY CHANNEL**

WIRE GUIDE 16

ZIPLOCK® (SIDE RETAINED) 17-18

19-20 **ACCESSORIES & OPTIONS**

HOW TO

21-23 **MEASURING GUIDE**


24-25 **MEASURING SHEET**

26 **EXAMPLE**

27 **HOW TO ORDER**













WHO WE ARE

Ozrite is a national manufacturer and distributor of the highest-quality custom made Outdoor Blinds; We have over **20 Years of Experience** and have supplied more than **50,000 Outdoor Blinds.**

We offer **Unbeatable Prices**, **Free Delivery**, and back our products with an industry-leading **5 Year Warranty**.



WHAT WE DO

We recognised the need for a costeffective alternative for those that want to **DIY and Save** on custommade Outdoor Blinds and still get a high-quality product at an affordable price.

We combine quality with great value and endeavour to make sure our outdoor blinds are available at the best price possible – every time!







5 YEAR WARRANTY



MADE IN AUSTRALIA



FREE DELIVERY
AUSTRALIA WIDE



LOWEST PRICE
GUARANTEE




THE ULTIMATE OUTDOOR BLINDS

BLIND FEATURES

Make the most of your outdoor living space all year round; Our custom made Outdoor Blinds can create a weatherproof barrier keeping you protected from the Sun, Wind, Rain & Insects.







99% WIND PROTECTION



99% RAIN PROTECTION





A FEW MORE FEATURES

MORE FEATURES

LARGER EXPANSES

UP TO 6M WIDE & 4M HIGH

PAYMENT & DELIVERY

SECURE AT ANY HEIGHT

LOCKING MECHANISMS AS STANDARD







ALUMINIUM & STAINLESS STEEL PARTS



PAYMENT INFO

DELIVERY

CURRENT LEAD TIME

We strive to ship your order as quickly as possible; our current lead time is **2-3 Weeks** on all products.

DELIVERY AREAS

We offer Free Delivery Australia
Wide, with a few obvious
exceptions
(islands etc.)

PAYMENT

We accept the following payment options:

Bank Deposit, PayPal,
Visa & Mastercard

SECURITY

We treat the security of your information very seriously. For this reason, we have chosen to use **PayPal** to process payments.







FINANCE AVAILABLE

UP TO 36 MONTHS INTEREST-FREE

Buy Today, Pay Over Time — no interest ever with Humm Finance.

Apply for a Humm account and get approved for up to \$7500; it only takes a few minutes and is available at the checkout or by giving us a call.



When choosing a fabric for your new outdoor blinds the amount and type of protection will dictate which material is best.

Our fabrics are made to world-leading standards designed to tackle the harsh Australian climate and best of all they are backed by our 5-year warranty.



SUNSCREEN 95

The Sunscreen Range Blocks 95% of Sun, Wind and Rain. It keeps in winter warmth and allows you to keep your view whilst reducing glare and creating privacy from the outside looking in.

It's a great all year round fabric, making it the most popular fabric choice in our range.

SUNSCREEN 95 COLOURS



PRIVACY 99%

The Privacy Range Blocks 99% of Sun, Wind and Rain.

As the name suggests, it's designed to create more privacy but is harder to see out; and the tighter weave gives that little bit of extra protection.

This is the ideal fabric choice when privacy is the primary purpose of the blind.





POWDER COATED **HARDWARE**



OPERATING YOUR OUTDOOR BLINDS


There are **three ways** to operate your outdoor blinds; Manual control is cost-effective and available in two configurations: **Spring Assisted** & **Gearbox Operated**, or you can control your blinds from afar by **Remote Control**.

SPRING ASSISTED

A pre-tensioned spring sits hidden inside the top roller; you simply pull the blind up and down to the desired position.

Quick and easy to use.

RECOMMENDED FOR BLINDS UP TO 3.5M IN WIDTH.




GEARBOX OPERATION

Wind up and down using the removable handle. This simple design is easy to use and allows for fabric tensioning.

Ideal for outdoor blinds that are too high to reach.

SUITABLE FOR ALL BLIND SIZES.



REMOTE CONTROL

As simple as pressing a button on the remote control, the blind can be positioned at any height.

Whisper quiet.

Ideal when operating more than one blind at a time.

SUITABLE FOR ALL BLIND SIZES.



SMART HOME READY

AUTOMATION

As simple as pressing a button on the remote, motorised blinds can be positioned at any height and can be paired with optional Sun & Wind sensors for peace of mind or controlled by your smartphone with the Neo Smart Box.



NEO SMART BOX

Seamlessly integrates with your home automation system, voice control assistants via WiFi and uses a smartphone app to control your blinds from anywhere in the world.

GOOGLE HOME, AMAZON ALEXA & SIRI COMPATIBLE.



SUN & WIND SENSOR

Automatically adjusts the position of an outdoor blind based on wind speed and / or a preset amount of sunlight.



5 YEAR WARRANTY



EASY TO SETUP





COMPARE PRODUCTS

COMPARE PRODUCTS

USE THIS PAGE TO COMPARE PRODUCTS & SPECS
















and the same				No. of Control of Cont			- C
PRODUCT	PIVOT ARM AWNING	THE RETRACTABLE	TWIST LOCK CHANNEL	STRAIGHT DROP CRANK	HEAVY DUTY CHANNEL	WIRE GUIDE	ZIPLOCK®
MAX WIDTH (MM)	3900	3000	3000	5500	5500	5500	6000
MAX HEIGHT (MM)	2700	2400	2400	3000	3000	3000	4000
MAX AREA (M2)	10 M2	7.2 M2	7.2 M2	16.5 M2	16.5 M2	16.5 M2	16.5 M2
FITTING OPTIONS	FACE FIT	FACE FIT REVEAL FIT	FACE FIT REVEAL FIT	FACE FIT REVEAL FIT	FACE FIT REVEAL FIT	FACE FIT REVEAL FIT	FACE FIT REVEAL FIT
STANDARD OPERATION	GEARBOX	SPRING ASSIST	SPRING ASSIST	GEARBOX	GEARBOX	GEARBOX	SPRING ASSIST / GEARBOX
LOCKING MECHNISM	SPRING-ARM	SNAP LOCKS	SIDE CHANNELS	SNAP LOCKS	LOCKING PINS	GUIDE WIRES	SIDE RETENTION
WIND RATING	NOT RATED	NOT RATED	NOT RATED	50KM/H *	50KM/H *	50KM/H *	70KM/H *
CAN BE MOTORISED	YES	NO	NO	NO	YES	YES	YES

^{*}ALWAYS PUT YOUR BLIND UP DURING HIGH WINDS OR SEVERE STORMS.

PIVOT ARM AWNING





PRODUCT DESCRIPTION

Ideal for sliding doors or windows, the arms pivot from the centre to easily create overhead shade or completely cover the opening.

The inclination of the spring-loaded arms provides precisely the right angle to allow for shade while permitting light and airflow, creating a larger area between the awning and the window or opening.

OPERATION

- Gearbox Operation
- Remote Control

SPECIFICATIONS

MAX WIDTH: 3900mm
MAX HEIGHT: 2400mm


MAX m2: 10m2






THE RETRACTABLE



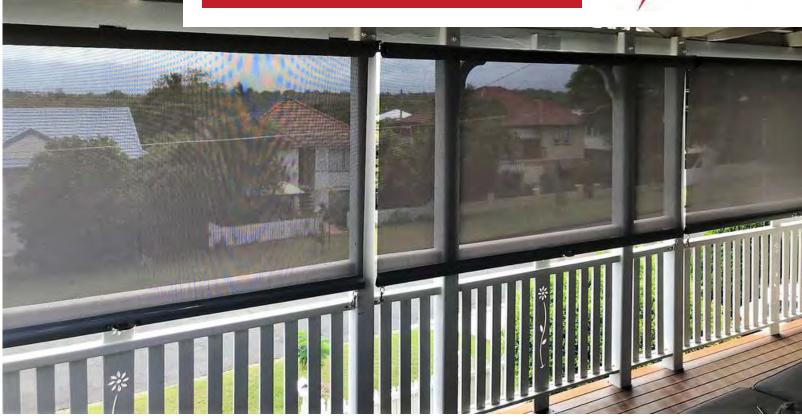





PRODUCT DESCRIPTION

Quick and easy to use, the Retractable is suited to smaller openings.

Easy to pull up and down and comes as standard with grab handle & Stainless Steel Snap Locks to secure in multiple positions.

OPERATION

Spring Assisted

SPECIFICATIONS

MAX WIDTH: 3000mm
MAX HEIGHT: 2400mm

MAX m2: 7.2m2





TWIST LOCK CHANNEL









PRODUCT DESCRIPTION

The Twist Lock is easy to use and can be secured at any height by simply pulling the base-rail down and twisting to lock.

The Side Channels cover the gap between the post/wall and the fabric.

OPERATION

Spring Assisted

SPECIFICATIONS

MAX WIDTH: 3000mm
MAX HEIGHT: 2400mm

MAX m2: 7.2m2






STRAIGHT DROP CRANK









PRODUCT DESCRIPTION

The Straight Drop Crank is our most versatile blind, suited for larger expanses or windy areas.

It can be installed between posts/walls, on the face of a beam or to the underside of a ceiling and comes with stainless steel snap locks to secure at any height and tension.

OPERATION

Gearbox Operation.

SPECIFICATIONS


MAX WIDTH: 5500mm
MAX HEIGHT: 3000mm





HEAVY DUTY CHANNEL



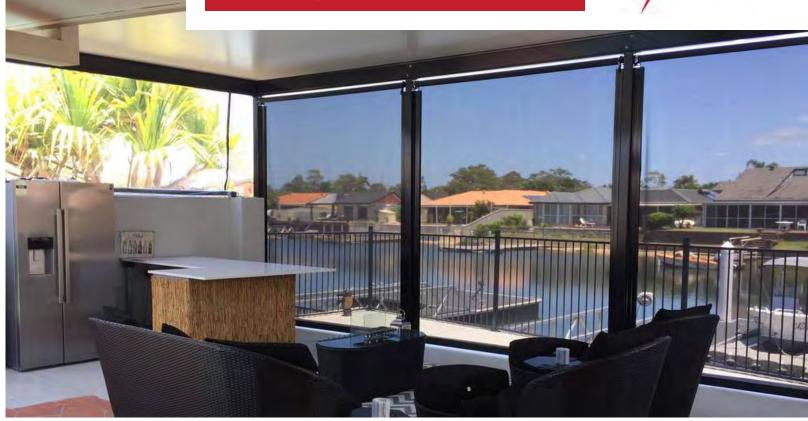





PRODUCT DESCRIPTION

The Heavy Duty Channel is suited to larger expenses or windy areas; the powder-coated aluminium side channels cover the gap between the inside of the post/wall and the fabric.

The blind can be secured using the locking pins at adjustable levels, which allow for fabric tensioning.

OPERATION

- Gearbox Operation
- Remote Control

SPECIFICATIONS

MAX WIDTH: 5500mm

MAX HEIGHT: 3000mm





WIRE GUIDE









PRODUCT DESCRIPTION

The Wire Guide is ideal for scenarios with no posts or walls to secure the blind; the pre-tensioned wires act as a guide for the base rail; this means the blind can be positioned at any height.

OPERATION

- Gearbox Operation
- Remote Control

SPECIFICATIONS

MAX WIDTH: 5500mm
MAX HEIGHT: 3000mm





ZIPLOCK ® SIDE-RETAINED OUTDOOR BLIND





PRODUCT DESCRIPTION

Ziplock® creates a weatherproof barrier keeping you protected from the Sun, Wind, Rain & Insects.

The unique side retention system keeps the fabric locked in on the sides while still allowing it to guide at every position.

Ziplock® is designed to handle the harshest Australian conditions,

and being an Aluminium system, means it's perfectly suited to coastal conditions.

OPERATION

- Spring Assisted
- Gearbox Operation
- Automation

SPECIFICATIONS


MAX WIDTH: 6000mm
MAX HEIGHT: 4000mm





ZIPLOCK [®] SIDE-RETAINED OUTDOOR BLIND



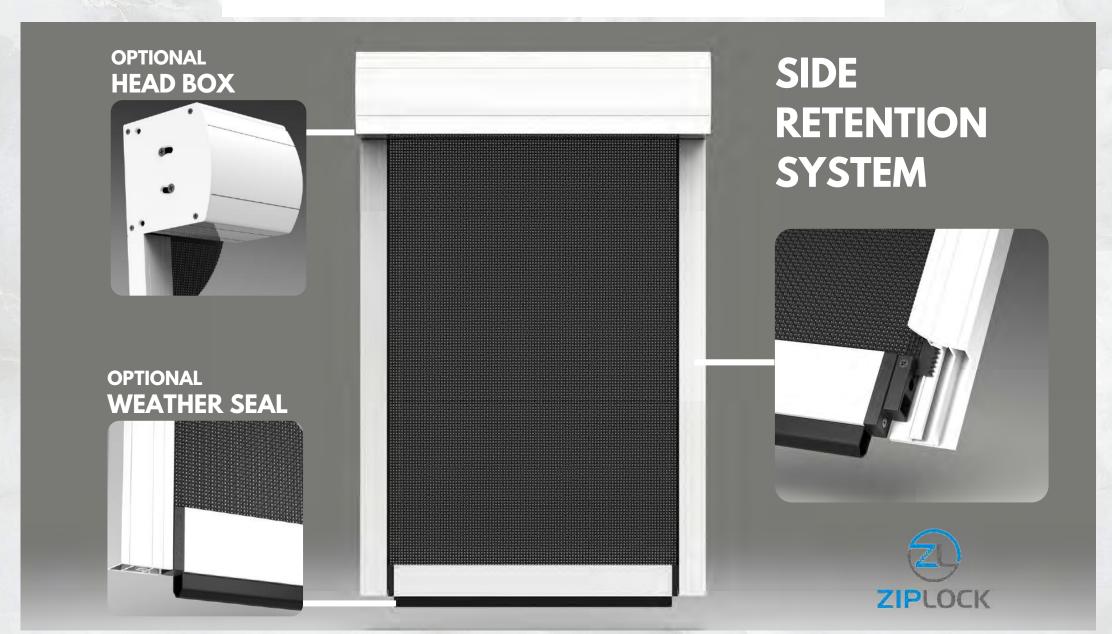

ACCESSORIES & OPTIONS

We offer a wide range of optional extras to help complete your project, add functionality & style to your chosen product.

CRANK HANDLE

Crank Handles are used wind a Gearbox Operated blind up and down; It simply hooks into the loop on the end of the gearboxes shaft and is turned to move the blind.

The length is determined by measuring from the top of the blind to somewhere between shoulder and waist height for optimal use.



PULL STICK

Use a Pull Stick to reach the base rail on an out of reach Spring Assisted blind; simply hook and pull.

1200mm in length as standard.



HEADBOX

Headbox is an extruded aluminium enclosure designed to hide the top roller and is 140x140mm in overall dimensions.

There are two available variations:

Fully Closed - for Spring Assisted or Motorised blinds.

Semi Closed - for Gearbox Operated blinds.

COMPATABLE PRODUCTS:

ANY OZRITE OUTDOOR BLIND




WEATHERSEAL

This 20mm rubber strip slots into the underside of the base rail.

Its primary purpose is to cushion the base rail from impact and close small gaps under the blind due to sloping floors.

COMPATABLE PRODUCTS:

WIRE GUIDE, HEAVY DUTY CHANNEL & ZIPLOCK

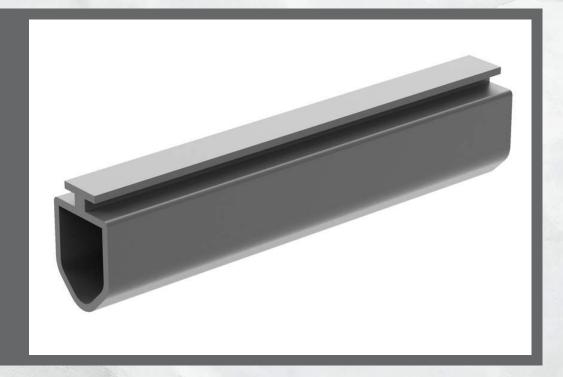

MEASURING GUIDE

It won't take long; just follow these simple instructions.

WHAT YOU NEED



TAPE MEASURE

OR LASER MEASURING
TOOL IF YOU HAVE ONE



PEN/PENCIL

TO NOTE DOWN YOUR SIZES



MEASURING SHEET


THE BACK PAGE
OF THIS BOOKLET

REVEAL OR FACE FIT?

There are two ways to Measure & install Outdoor Blinds:

Reveal Fit: inside a recess or between posts.

Face Fit: on the face of a beam, post or wall.

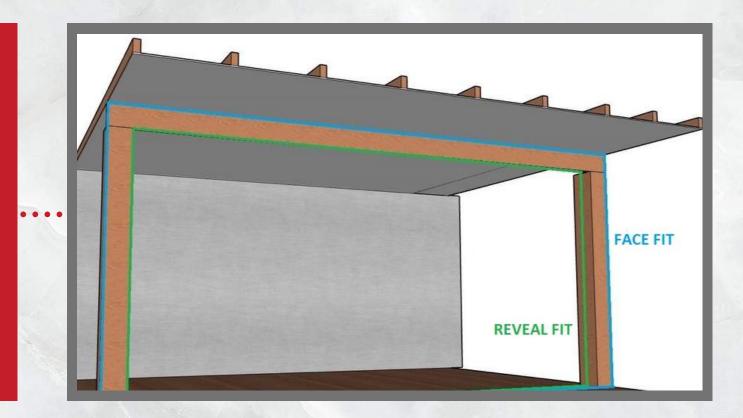

HOW TO MEASURE REVEAL FIT

WIDTH


- Measure from one side of the opening to the other at the top - note this measurement.
- Measure from one side of the opening to the other at the bottom - note this measurement.
- Use the smallest size for your order.


Note: If the difference between these widths is greater than 10mm, then some packing or levelling will be required to ensure a snug fit for your blinds.

HEIGHT

- Measure from the top left side of the opening to the point you want your blind to stop - note this measurement.
- Measure from the top right side of the opening to the point you want your blind to stop - note this measurement.
- Use the longest size for your order.

Note: It is normal to have some variation in the height, usually to allow water to run away from the house.

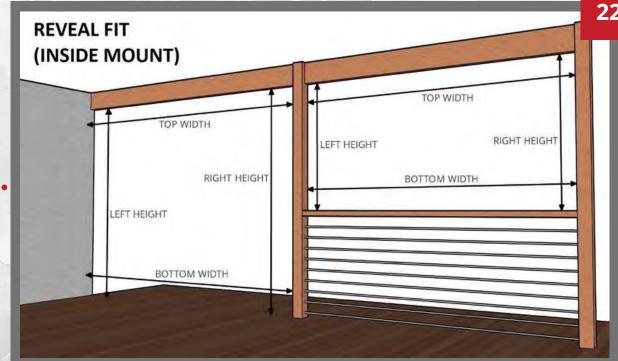

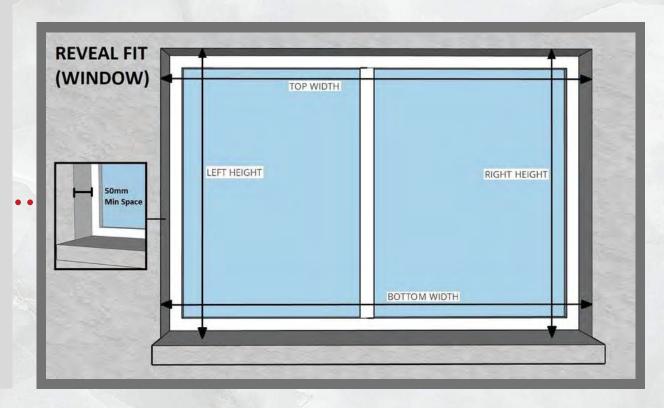

HOW TO MEASURE FACE FIT

WIDTH


- Measure from one side of the opening to the other at the top - note this measurement.
- Measure from one side of the opening to the other at the bottom - note this measurement.
- Add 100mm (50mm on each side) to these measurements to allow for sufficient overlap for installation.
- Use the smallest measurement as the actual width.


Note: Overlap the opening by more than 50mm on each side if you have enough room to minimise light gaps and hide installation hardware from the inside.

HEIGHT

- Measure from the highest point on the face of your beam on the left side of the opening to the point you want your blind to stop - note this measurement.
- Measure from the highest point on the face of your beam on the right side of the opening to the point you want your blind to stop - note this measurement.
- Use the longest measurement for your order.

Note: A minimum of 100mm is required to install the brackets. It is normal to have some variation in the height, usually to allow water to run away from the house.

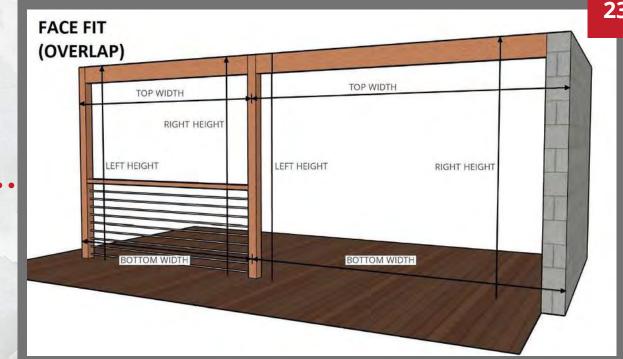

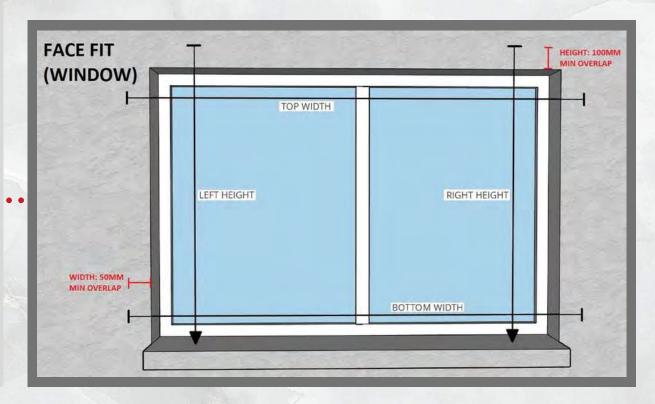



MEASURING SHEET

USE THIS SHEET TO LAYOUT AND NOTE YOUR MEASUREMENTS, THE SIZES WE REQUIRE ARE THE OVERALL BLIND SIZES, AND WE WORK EVERYTHING OUT TO FIT WITHIN THIS SPACE.


WHEN MEASURING, ALWAYS LOOK FOR OBJECTS LIKE AIR CONDITIONERS OR DOWNPIPES, AND TAKE THEIR POSITION INTO ACCOUNT TO ENSURE YOU HAVE A CLEAR SPAN.

BLIND No.	WIDTH (IN MM)	HEIGHT (IN MM)	BLIND TYPE	FABRI	C OPERATION (+ CONTROL SIDE)	NOTES/COMMENTS
1	TOP BOTTOM	LEFT RIGHT		TYPE COLOUR	SPRING GEARBOX L R	
			9997	1	MOTOR L R	
2	TOP	LEFT		TYPE	SPRING GEARBOX L R	
	воттом	RIGHT		COLOUR	MOTOR L R	
	TOD	LEFT.		TVDE	SPRING	
3	TOP	LEFT		TYPE	GEARBOX L R	
	BOTTOM	RIGHT		COLOUR	MOTOR L R	•
	TOP	LEFT	1000	TYPE	SPRING	
4					GEARBOX L R	
	BOTTOM	RIGHT		COLOUR	MOTOR L R	
			and a fire plant of		SPRING	
5	TOP	LEFT		TYPE	GEARBOX L R	
	BOTTOM	RIGHT		COLOUR	MOTOR L R	



FLOOR LAYOUT

USE THIS GRID TO SKETCH OUT A BIRD'S EYE VIEW OF YOUR AREA, THEN ADD YOUR
MEASUREMENTS ALONG WITH ADDITIONAL DETAILS OR OBSTRUCTIONS TO GET A CLEAR PLAN TO
WORK OFF.

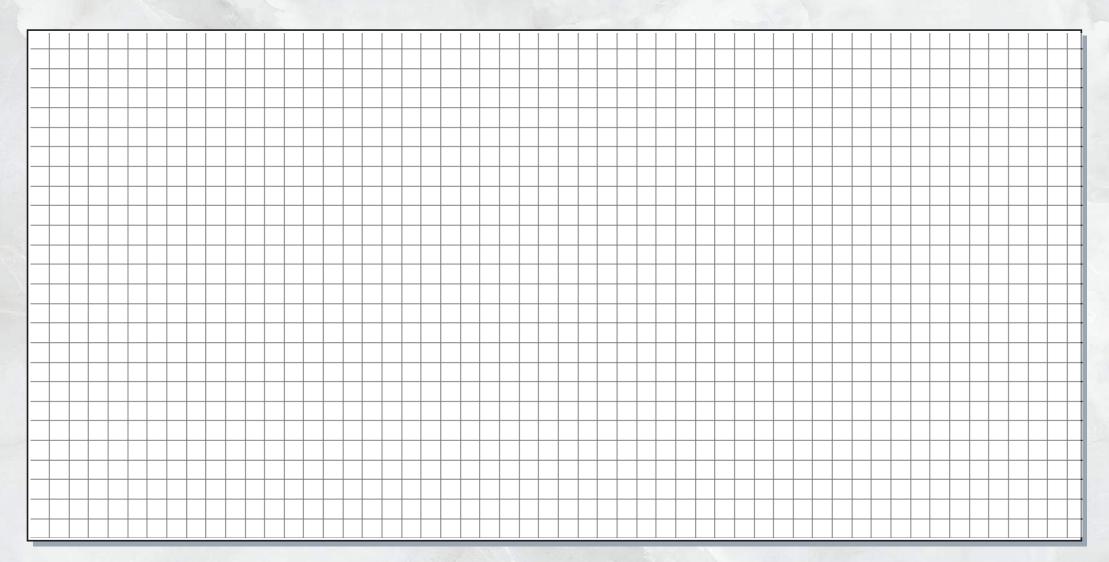

EXAMPLE PAGE



AN EXAMPLE FOR 2X ZIPLOCK BLINDS FOR AN L SHAPED ALFRESCO IN A REVEAL FIT SCENARIO.

IN THIS EXAMPLE, THE CUSTOMER WANTS TO OPERATE BOTH BLINDS FROM THE SAME CENTRAL POST, AND THE CONTROL SIDE HERE WOULD BE DETERMINED FROM THE INSIDE LOOKING OUT.

BLIND NO.	WIDTH (IN MM)	HEIGHT (IN MM)	BLIND TYPE		FABRIC	OPERATION (+ CONTROL SIDE)	NOTES/COMMENTS
1	TOP 3884 BOTTOM 3886	LEFT 2410 RIGHT 2410	Ziplock		Sunscreen Ebony 95	☐ SPRING ☑ GEARBOX L ☐ R ☒ ☐ MOTOR L ☐ R ☐	Ix 1200 long Crank Handle.
2	TOP 1210 BOTTOM 1210	LEFT 2410 RIGHT 2415	Ziplock	TYPE COLOUR	Sunscreen Ebony 95	SPRING SEARBOX L X R MOTOR L R	
	attached to	& Tracks o brick wall eal fit)	3884 24 Alf-r	nd I. 1W X 10H Tesco	attached (r) Br	cets & Tracks I to existing post reveal fit) acket & Tracks ched to brick wall (reveal fit)	Existing Post (IOOXIOOmm) Blind 2. 210W X 2410-2415H

WIDTH: ORDER TO THE SMALLEST WIDTH - WE CAN WORK WITH A VARIANCE OF 10MM; ANYTHING ABOVE THIS REQUIRES SOME PACKING/LEVELLING.
HEIGHT: ORDER TO THE LONGEST SIDE - IT IS NORMAL TO HAVE SOME VARIATION HERE, USUALLY SO THAT WATER CAN SLOPE AWAY FROM THE HOUSE.

READY TO ORDER?

Once you can tick off the below checklist, you are now ready to order your new custom made outdoor blinds.

- Selected Suitable Product.
- Measured Your Area.
- **✓** Chosen Fabric & Colours.







GET IN TOUCH

As well as being approachable, our team are all great at what they do. Collectively we have over 20 years' experience and there's not a single question about Outdoor Blinds we can't answer.

- 1300 559 400
- 30 Smith St, Capalaba, QLD 4157
- www.ozriteblinds.com.au

#ozrite





