




1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

BEST SUITED FOR APPLICATIONS REQUIRING CONTROL OF A SINGLE DOOR OR GATE AND IN APPLICATIONS WHERE CARD READERS OR OTHER EXPANSION OPTIONS ARE NOT REQUIRED

- Provides both resident and visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- PC programmable. Programming and Transaction Analysis software included
- 2 year limited factory warranty

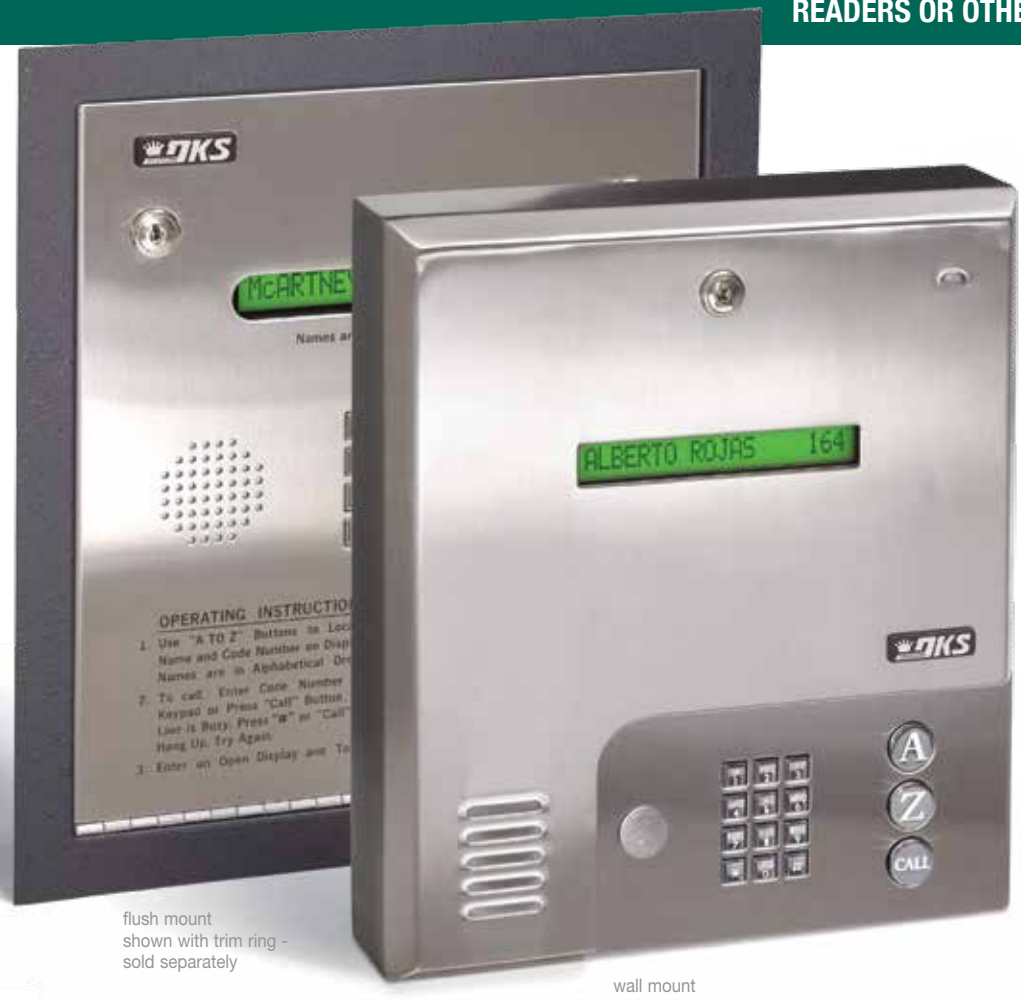

large scroll
and call buttons



big characters
half inch LCD display




stainless steel
plate and anti-vandal features



pc programmable
easy to use Remote Account Manager software included

1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

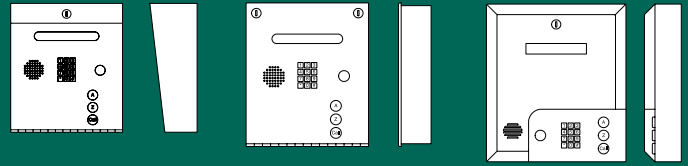

1834 Surface

11.25" W x 13" H x 4.75" D
(285mm W x 330mm H x 120.6mm D)

1834 Flush

12" W x 13.25" H x 3.25" D
(305mm W x 336.5mm H x 82.5mm D)

1834 Wall

13.25" W x 15" H x 3.5" D
(336.5mm W x 381mm H x 88.9mm D)

| 1834 | PHONE # MEMORY | ENTRY CODES | DEVICE CODES | RELAYS | DIRECTORY | ELEVATOR CONTROL | PROGRAMMING OPTIONS | OPTIONS | TRANSACTION BUFFER |
|----------------------|----------------|----------------|--------------|--------|-------------------------|------------------|---------------------------|-----------------------|--------------------|
| Surface Mount | 3000 | 1000 (4-digit) | 0 | 2 | Single Line LCD Display | No | Computer or System Keypad | | 8000 Events |
| Flush Mount | 3000 | 1000 (4-digit) | 0 | 2 | Single Line LCD Display | No | Computer or System Keypad | Gold Plated Faceplate | 8000 Events |
| Wall Mount | 3000 | 1000 (4-digit) | 0 | 2 | Single Line LCD Display | No | Computer or System Keypad | | 8000 Events |

Technical Features

Mechanical

Stainless steel faceplate
Galvanized steel sub-plate
Metal keypad
Offset speaker holes for protection
Hands free voice operation
(Optional handset available on surface or flush mount only)
Surface, Flush or Wall mounting styles
Flush mount requires flush mounting kit
Enclosures are rated NEMA 4x

Connection Methods (for data transfer)

DK IM (Internet Modem) Server, Modem, RS-232, RS-422, Wireless, LAN, Internet (some of these methods will incur additional cost for hardware and/or service subscriptions)
Database import/export capability using CSV file format

Electrical

Single line 20 character super-twist LCD display
1/2 inch characters
16 VAC (2 power transformers included)
Full Duplex voice communication
Stores up to 3000 phone numbers, 255 area codes
Transaction buffer stores last 8000 events
Control 2 entry points
Programmable directory codes (1 to 4 digits)
10 & 11 digit dialing capability
31 security (permission) levels, 29 programmable with 4 time zones each, 32 holiday schedules
Four-digit entry codes
Built-in clock / calendar
Hold open time zones (8)
Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

Miscellaneous

Environmental: 10°F to 145°F (-12°C to 62°C)
Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)
ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
Camera Ready: Optional B&W or Color CCTV camera*
*may require additional CCTV equipment
Shipping weight approximately 15-20 Lbs (6.8-9 kg)



FCC (US) DUF6VT-12874-OT-T
DOC (CAN) 1736 4528 A



Access Control Solutions since 1948

MEMBER:



DOORKING® INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2012 All Rights Reserved. Product specifications may change without notice.
Rev. 9/12

Distributed by: