

SL3000UL SLIDE GATE OPERATOR

SECTION 32 31 00



KEY FEATURES

| | |
|---|---|
| REMOTE CONTROL ACCESS | Security+ 2.0® 3-channel receiver will handle up to 50 remote controls (unlimited remotes with 811LMX/813LMX) |
| INTERNET CONNECTIVITY | myQ® technology monitors and controls the operator through the myQ app |
| MONITORED SAFETY INPUTS | 6 inputs (main and expansion board) |
| DIAGNOSTIC DISPLAY | LED diagnostic display |
| WIRELESS DUAL-GATE COMMUNICATION | Eliminates expensive conduit costs and unsightly driveway scars |
| LIMIT SETTING | Mechanical |
| PROGRAMMABLE AUXILIARY RELAYS | Easily add additional features, such as warning lights/alarms |
| UNAUTHORIZED ACCESS PREVENTION | Can be programmed with anti-tailgate or quick close capabilities |
| HOMELINK® COMPATIBLE | Version 4 and higher |

SPECIFICATIONS

| | |
|-----------------------------------|---|
| OPERATOR SPEED | 12 in. per second |
| POWER | 120VAC single phase |
| ACCESSORY POWER | 24VDC, 500mA output |
| OPERATOR WEIGHT | 140 lbs. |
| WARRANTY | 5 years commercial, 7 years residential |
| TEMPERATURE SPECIFICATIONS | Without heater: -4°F (-20°C) to 140°F (60°C); with optional heater: -40°F (-40°C) to 140°F (60°C) |
| UL USAGE CLASSIFICATION | UL 325 & UL 991 listed – class I, II, III and IV |

CONSTRUCTION

| | |
|-------------------------------|--|
| MOTOR | High-temperature (1/2 HP or 1 HP) AC motor with class H insulation for high cycle, high-temperature applications |
| OPERATOR DUTY RATING | Continuous duty |
| CHASSIS/FRAME | Constructed with 1/4 in. black powder-coated steel for rust prevention |
| GEAR REDUCTION | 30:1 worm gear reducer in synthetic oil bath |
| CHAIN | #41 black oxide (50 ft. included) |
| COVER | High-density UV resistant one piece polyethylene plastic for excellent heat and corrosion resistance |
| RECOMMENDED CAPACITIES | 1/2 HP rated for gates up to 50 ft. in length or weighing up to 1,000 lbs. 1 HP rated for gates up to 50 ft. in length or weighing up to 2,000 lbs. |

ACCESSORIES

Important: This operator requires installation of an external monitored entrapment protection device for each entrapment zone. Use only LiftMaster monitored entrapment protection devices itemized on the accessory page of the operators installation manual to meet UL 325 requirements.




DATA SHEET
SLIDE GATE OPERATOR

LiftMaster

SL3000UL SLIDE GATE OPERATOR

SECTION 32 31 00

DIMENSIONS

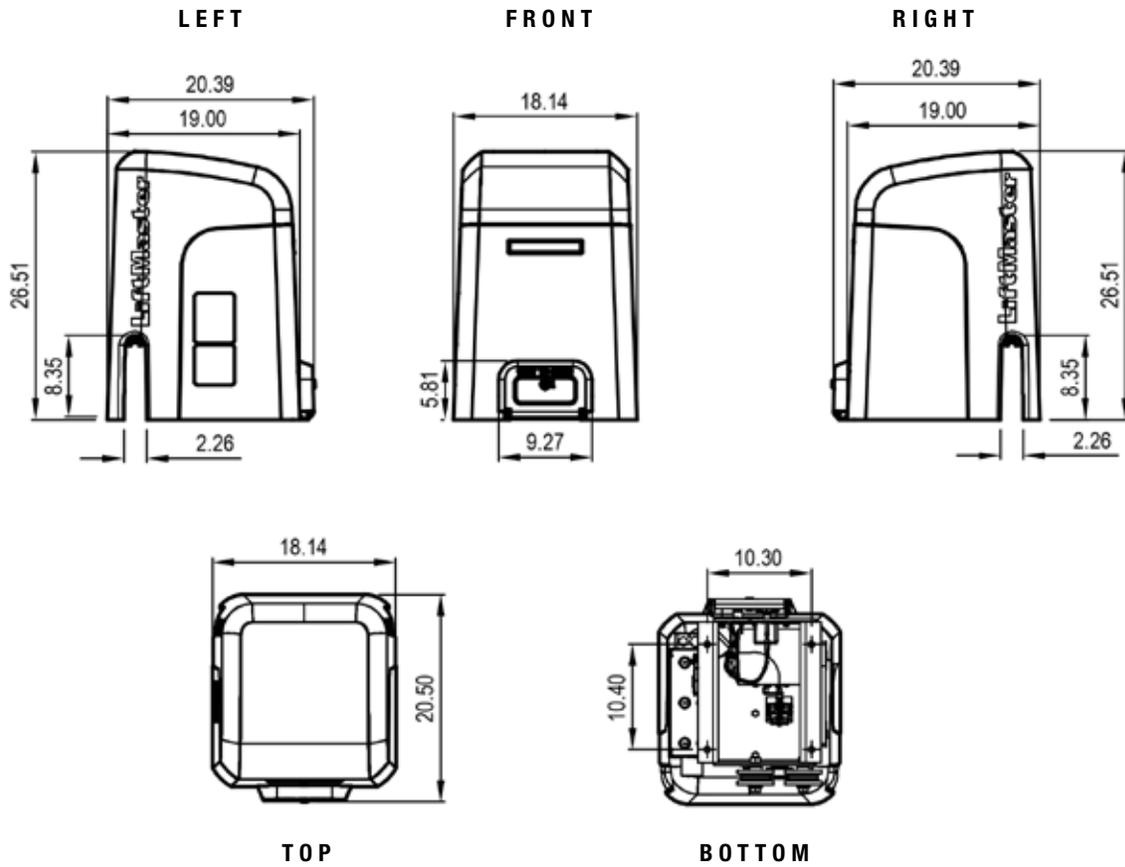

CAPACITY

