

SESTO

PXW75

LWU75 EQUIVALENT


Washed 75mm Drive Pin for use in TS750P.



Drive Pin - Washered

■ Galvanised Nail

GALVANISED Part No.	Description	Washer Dia (mm)	Nail Head width (mm)	Nail Length (mm)	Nail Shank Width (mm)	qty	qty
PXW75	8 x 75mm Washered Drive Pin - LWU75 equivalent	22	8	75	3.7	100	1000

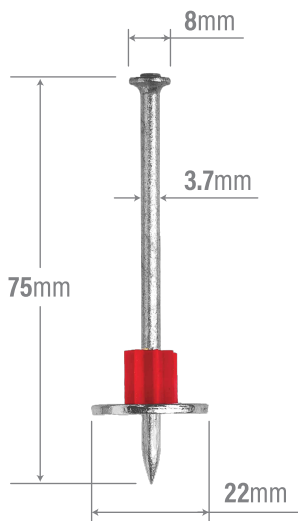

Applications;

Fixing Bottom Plates to Concrete.
Temporary fixing, boxing and formwork to concrete.
LWU75 Equivalent, for use in TS750P.

Features;

75mm Length - Ideal length for fixing 45mm Timber to Concrete.
Low Velocity Pin - Designed to be used in all leading brand piston tools.
22mm Washer Fixed - Washer fixed provides a larger bearing surface for higher loads.
Galvanised Finish - Increased durability.
Ballistic Tip - Machined point provides more consistent penetration.



Performance Information

Allowable Working Load Capacity (32MPa Concrete)

Part No.	Description	Tensile Capacity	Shear Capacity
PXW75	PX DRIVE PIN - With 22mm Metal Washer	0.38kN	0.38kN