


SR Series Rivets | STEEL

The SR Series rivets are blind rivets with a mechanically locked mandrel. They are optimal for structural or demanding applications. Installed easily from one side, the rivet features impressive installed values, excellent hole fill, generous grip range, pressure tight seal and flush breaking mandrel regardless of material thickness.



Material: Body: Steel
Mandrel: Steel

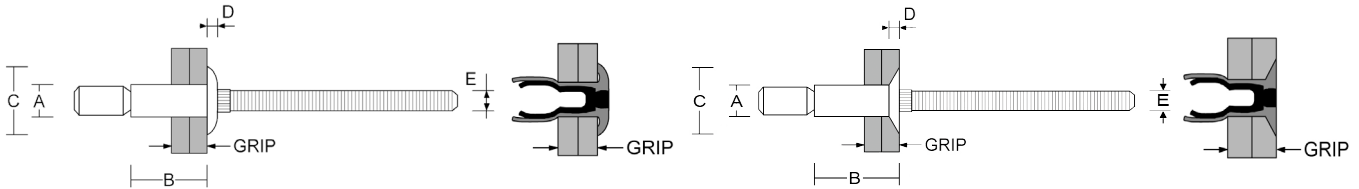

Diameter	Part Code	Grip	Hole	A	B	C	D	E	Shear	Tensile
mm		mm	mm	mm	mm	mm	mm	mm	KN	KN

SRDR | Steel Rivet | Steel Mandrel | Dome Head

4.8	SRDR-0604	1.60 - 6.35	5.00	4.80	10.5	9.80	2.10	3.00	6.40	4.90
	SRDR-0607XG	1.60 - 11.1	5.00	4.80	14.5	9.80	2.10	3.00	6.40	4.90
6.4	SRDR-0806	2.00 - 9.50	6.75	6.40	14.2	13.3	2.80	4.00	12.2	9.80
	SRDR-0810XG	2.00 - 16.0	6.75	6.40	20.5	13.3	2.80	4.00	12.2	9.80
	SRDR-0814XG	9.00 - 22.5	6.75	6.40	26.7	13.3	2.80	4.00	12.2	9.80
	SRDR-0818	21.0 - 28.5	6.75	6.40	33.3	13.3	2.80	4.00	12.2	9.80
	SRDR-0822	25.4 - 35.0	6.75	6.40	39.0	13.3	2.80	4.00	12.2	9.80
7.8	SRDR-1010	3.50 - 16.0	8.00	7.80	21.0	16.0	3.50	5.10	13.7	9.80
9.5	SRDR-1212	3.00 - 15.8	10.0	9.50	21.3	18.4	4.00	5.80	26.7	17.8
	SRDR-1218	16.0 - 29.0	10.0	9.50	35.6	19.2	4.00	5.80	26.7	17.8
	SRDR-1224	25.4 - 38.1	10.0	9.50	45.0	18.9	4.00	5.80	26.7	17.8
12.7	SRDR-1612	3.50 - 16.0	13.4	12.7	27.7	25.1	6.10	7.80	44.4	31.1

SR100 | Steel Rivet | Steel Mandrel | 100° Countersunk Head

4.8	SR100-R605	3.20 - 8.00	5.00	4.80	14.1	8.90	1.80	3.00	6.40	4.90
	SR100-R608	7.00 - 12.7	5.00	4.80	17.1	8.90	1.80	3.00	6.40	4.90
6.4	SR100-R808	4.00 - 12.0	6.75	6.40	16.6	10.0	2.00	4.00	12.2	9.80
	SR100-R812	10.5 - 18.4	6.75	6.40	23.1	11.0	2.00	4.00	12.2	9.80
9.5	SR100-R1212	6.00 - 19.0	10.0	9.50	21.3	15.7	4.00	5.80	26.7	17.8

SRTR | Steel Rivet | Steel Mandrel | Large Flange

4.8	SRTR-0604	1.60 - 6.35	5.00	4.80	10.5	12.7	1.90	2.90	6.40	4.90
	SRTR-0607	5.40 - 11.1	5.00	4.80	14.5	12.7	1.90	2.90	6.40	4.90