


## SR Series Rivets | STAINLESS STEEL

The SR Series rivets are blind rivets with a mechanically locked mandrel. They are optimal for structural or demanding applications. Installed easily from one side, the rivet features impressive installed values, excellent hole fill, generous grip range, pressure tight seal and flush breaking mandrel regardless of material thickness.



**Material:** Body: 304 Stainless Steel  
Mandrel: 304 Stainless Steel

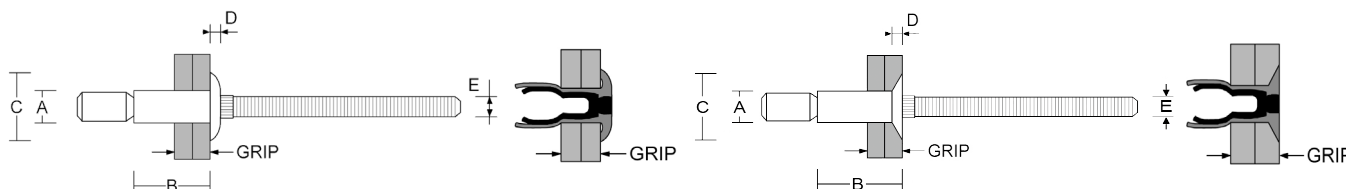

Diameter mm	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	E mm	Shear KN (nominal)	Tensile KN (nominal)
----------------	-----------	------------------	-----------------	---------	---------	---------	---------	---------	--------------------------	----------------------------

### SRDU | Stainless Steel Rivet | Stainless Steel Mandrel | Dome Head

<b>4.8</b>	SRDU-0604	1.60 - 6.40	5.00	4.80	10.5	9.80	2.10	3.00	6.20	4.40
	SRDU-0607XG	1.60 - 11.1	5.00	4.80	14.5	9.80	2.10	3.00	6.20	4.40
<b>6.4</b>	SRDU-0806	2.00 - 9.50	6.75	6.40	14.2	13.3	2.80	4.00	11.28	8.90
	SRDU-0810XG	2.00 - 15.9	6.75	6.40	20.5	13.3	2.80	4.00	11.28	8.90
<b>7.8</b>	SRDU-1010	5.00 - 15.0	8.00	7.80	21.0	16.0	3.50	5.10	17.7	11.8
<b>9.5</b>	SRDU-1212	3.00 - 16.0	10.0	9.50	12.3	20.0	3.50	5.80	26.7	17.8

### SR100 | Stainless Steel Rivet | Stainless Steel Mandrel | 100° Countersunk Head

<b>4.8</b>	SR100-U606	3.20 - 8.00	5.00	4.80	14.1	8.90	1.80	3.00	6.20	4.40
	SR100-U609	7.00 - 12.7	5.00	4.80	17.1	8.90	1.80	3.00	6.20	4.40
<b>6.4</b>	SR100-U808	3.20 - 11.1	6.75	6.40	18.7	10.0	2.00	4.00	11.1	8.30
	SR100-U812	10.5 - 18.4	6.75	6.40	23.1	10.0	2.00	4.00	11.1	8.30