

# PRODUCT DATASHEET

## L 30 W/640

Basic T8 | Tubular fluorescent lamps 26 mm, with G13 bases



**TECHNICAL DATA**


Electrical data

Nominal voltage	96 V
Nominal wattage	30.00 W
Rated wattage	30.00 W

Photometrical data

Color rendering index Ra	≥60
Rated luminous flux	2100 lm
Luminous flux at 25 °C	2100 lm
Light color	4000
Rated color temperature	4000 K
Nominal luminous flux	2100 lm
Light color (designation)	Cool White
Color temperature	4000 K
Luminous flux	2100 lm
Color rendering index Ra	≥60

Dimensions & weight

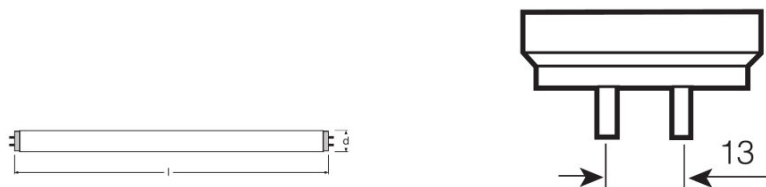

G13  
IEC 7004-51  
DIN 49653 T1

Tube diameter	26 mm
Length	895.0 mm
Length with base excl. base pins/connection	895.00 mm
Diameter	26.0 mm


Lifespan

Service life	5000 h
Lifespan	13000 h <sup>1)</sup>
Rated lamp life time	13000 h
Nominal lamp life time	13000 h

1) With CCG/LLCG

Additional product data

<b>Base (standard designation)</b>	G13
<b>Mercury content</b>	9.0 mg
<b>Show WEEE picto</b>	Yes



Circuit diagram

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4006584096633	L 30 W/640	Shipping carton box 25	943 mm x 151 mm x 153 mm	21.79 dm <sup>3</sup>	3.91 g
4008321582485	L 30 W/640	Shipping carton box 25	943 mm x 151 mm x 153 mm	21.79 dm <sup>3</sup>	3.91 g
4008321959690	L 30 W/640	Shipping carton box 25	937 mm x 142 mm x 145 mm	19.29 dm <sup>3</sup>	3910.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.