

4" & 6" LED J-Box Downlight Canless Series





Project:	Part #:
Type:	

Retrofit Downlights









Detail Specifications: • Finish: White Smooth Standard

- · Black, Bronze, Brushed Nickel (Smooth & Baffle options)
- Wet Location Rated
- Beam Angle: 100° Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° 114° F
 Lens: Frosted PC, non-yellowing
- · Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- · Office and Meeting Rooms
- · Education, Healthcare, Retail, Hospitality

Product Information:

- Select-n-Switch Technology: 5-CCT Selectable
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- · SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installations:

- Cut Out Dimensions:
- 4": 4-1/4" 6": 6-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- · No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- · Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in / 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- · 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
 IC Rated and ASTM-E283 Air-Tight

Ontional Accessories (Order Senarately)

Complies with UL 263, ASTM E119, CAN ULC S101

Series	Emergency
LED DDL IDV 4 44W FOOT WILLOW	(1-11-)
LED-RDL-JBX-4-11W-5CCT-WH-SM	(blank)
11W • 750lm • 120V	No Emergency
LED-RDL-JBX-5/6-15W-5CCT-WH-SM	EMB
15W • 1,125lm • 120V	Emergency Backup


	*	ssories (Order Separater)	···
4" Trims	6" Trims	New Construction Plates	Emergency Backup ¹
RDL-TRIM-4-BLK-SM 4" Black Smooth RDL-TRIM-4-BZ-SM 4" Bronze Smooth RDL-TRIM-4-BN-SM 4" Brushed Nickel Smooth RDL-TRIM-4-WH-BFL 4" White Baffle RDL-TRIM-4-BLK-BFL 4" Black Baffle RDL-TRIM-4-BZ-BFL 4" Bronze Baffle RDL-TRIM-4-BN-BFL 4" Brushed Nickel Baffle RDL-TRIM-4-CUSTOM Custom Color	RDL-TRIM-5/6-BRZ-BFL 5/6" Bronze Baffle RDL-TRIM-5/6-BRZ-BFL 5/6" Bronze Baffle RDL-TRIM-5/6-BN-BFL 5/6" Brushed Nickel Baffle	CUNV-NC-ICAT-7H Universal plate w/ hanging bars C4-JBX-RI 4" Rough in plate C6-JBX-RI 6" Rough in plate CUNV-JBX-RI-XL Universal tough in plate. Extra long	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures 1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.




4" & 6" LED J-Box Downlight Canless Series

FEATURES

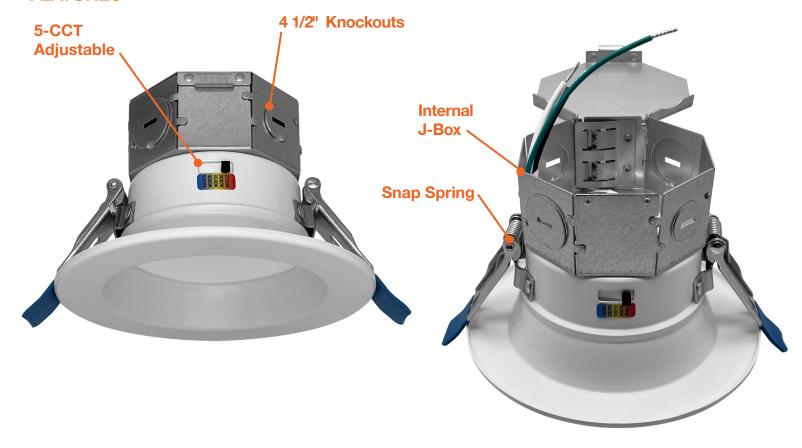



MEASUREMENTS

4 inch



5/6 inch








4" & 6" LED J-Box Downlight Canless Series


ACCESSORIES







C4-JBX-RI 4" Rough In Plate 6 1/2" x 13 1/4"



C6-JBX-RI 6" Rough In Plate 8 1/2" x 17 1/4"



CUNV-JBX-RI-XL

TRIMS

Accessory Model	Description
RDL-TRIM-4-BLK-SM	4" Black Trim Smooth
RDL-TRIM-4-BZ-SM	4" Bronze Trim Smooth
RDL-TRIM-4-BN-SM	4" Brushed Nickel Trim Smooth
RDL-TRIM-4-WH-BFL	4" White Trim Baffle
RDL-TRIM-4-BLK-BFL	4" Black Trim Baffle
RDL-TRIM-4-BZ-BFL	4" Bronze Trim Baffle
RDL-TRIM-4-BN-BFL	4" Brushed Nickel Trim Baffle
RDL-TRIM-4-CUSTOM	4" Custom Trim
RDL-TRIM-5/6-BLK-SM	5/6" Black Trim Smooth
RDL-TRIM-5/6-BZ-SM	5/6" Bronze Trim Smooth
RDL-TRIM-5/6-BN-SM	5/6" Brushed Nickel Trim Smooth
RDL-TRIM-5/6-WH-BFL	5/6" White Trim Baffle
RDL-TRIM-5/6-BLK-BFL	5/6" Black Trim Baffle
RDL-TRIM-5/6-BRZ-BFL	5/6" Bronze Trim Baffle
RDL-TRIM-5/6-BN-BFL	5/6" Brushed Nickel Trim Baffle
RDL-TRIM-5/6-CUSTOM	5/6" Custom Trim

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate
C6-JBX-RI	6" Rough In Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures



LED-EMB-15W-HV-0/10V-2P LED-EMB-25W-HV-0/10V-2P