



# ARCY-Line: 23" Suspended Circular Up/Down Lighting

## 3-CCT Selectable



### Detail Specification:

- Finish: White or Black
- IP Rating: Damp Location
- Beam Angle: 110° Up & Down
- Lumens: 2,500 Up/ 2,500 Down
- CCT Selectable: 30/35/40K
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: LGP Clear Diffuser
  - Creates a clear transfusion between frame and light
- Average life (L70) of 50,000 hours

### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

### Product Information:

- 23" Circumference
- Construction: aluminum housing with lgp clear diffuser
- Finished with corrosion free powder coating
- 6' power cord included on each fixture
- Select-n-Switch Technology: 4-CCT Selectable

### Driver Options:

- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

### Mounting & Installation:

- Suspended installation only
- 5-wire 6' power cord included
- 6' Canopy suspension kit included

### Certifications:


- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

DIRECTION	LUMENS
Up Light	2,500
Down Light	2,500

Series	Length & Wattage	Light Direction	CCT	Finish
<b>LED-SRD - 23-50W - UD - RTRI</b>				
Suspended Circular Up/Down Lighting	23" 50W	50% Up & 50% Downlight	50/40/35/30K	<b>WH</b> White <b>BL</b> Black

Specs and model numbers are subject to change with or without notice

**FEATURES**

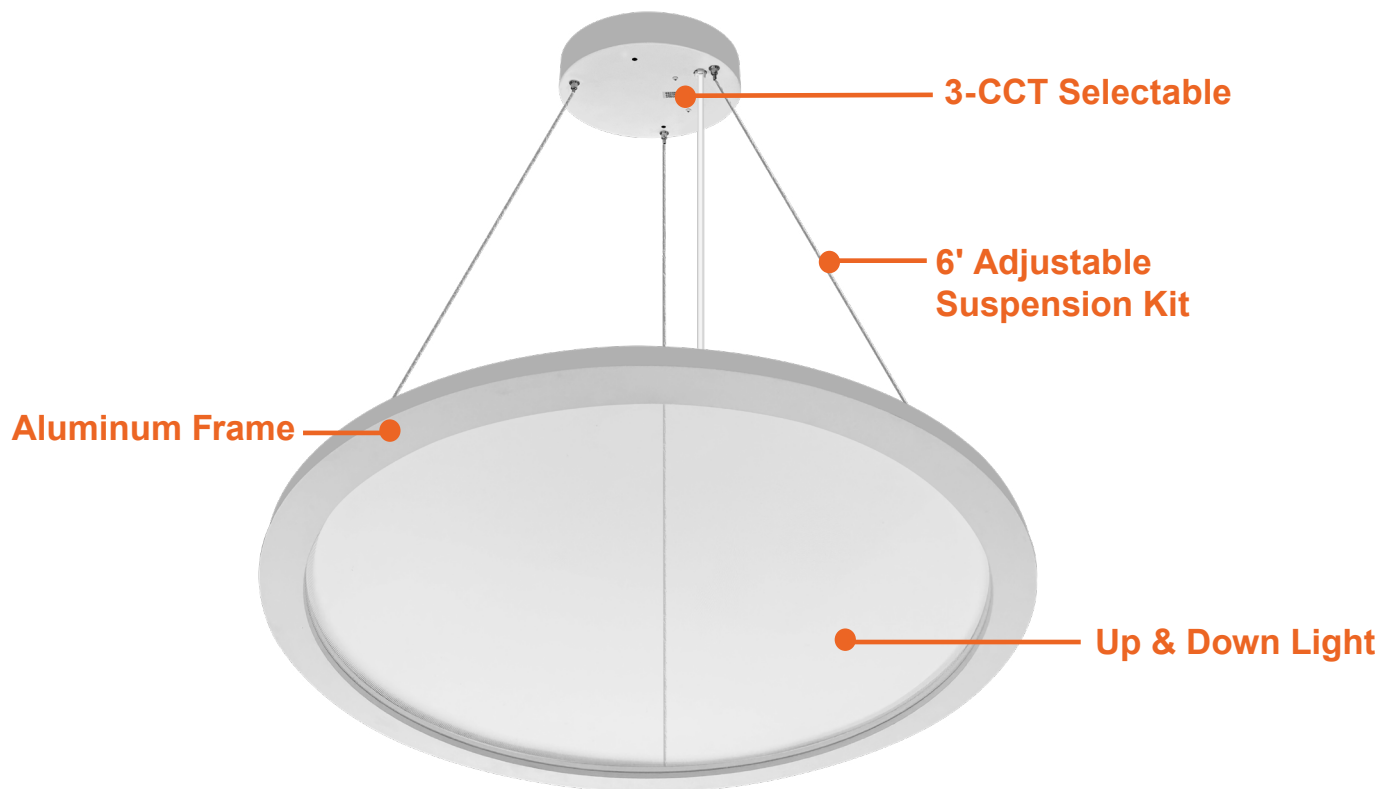

**DIMENSIONS**

