

AFC-Line: Full Cut Off Wall Packs

Adjustable Lens



Detail Specifications

- Finish: Bronze, Black, White, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: 90x110°
- Chip: SMD 2835, R9 >50, CRI >80
- BUG:
 - 30W: B2-U2-G1
 - 5P50W: B3-U3-G1
 - 5P80W: B3-U3-G1
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 3-Power Selectable (30w is single power)

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017


Series	Finish ¹	Photocell	Voltage	Sensor ²	Emergency	Surge Protector	Optional Accessories (Order Separately)
LED-WPFC-ADJ-30W-TRI 30W • 30/40/50K	BZ Bronze (Standard)	(blank) No	(blank) 120-277V	(blank) No Sensor	(blank) No Emergency	(blank) 6KV Built in	Remote for Sensors
LED-WPFC-ADJ-3P50W-TRI 30/40/50W • 30/40/50K	BL Black	PC Button	HV 277-480V	BMS Bi-Level Motion + Daylight Sensor (S-BMS-EXT-1)	EMB Emergency Backup	20KV 20KV Surge Protector	S-LINE-R S-Line Remote
LED-WPFC-ADJ-3P80W-TRI 60/70/80W • 30/40/50K	WH White GRY¹ Gray CS¹ Custom Color	PC Photocell		BMSBT Bi-Level Motion + Daylight Sensor -Bluetooth Control- (S-BMS-EXT-1-BT) (HB01DMS-C)			

1. Standard quickship is bronze. Other colors are custom finishes





2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice.

FEATURES

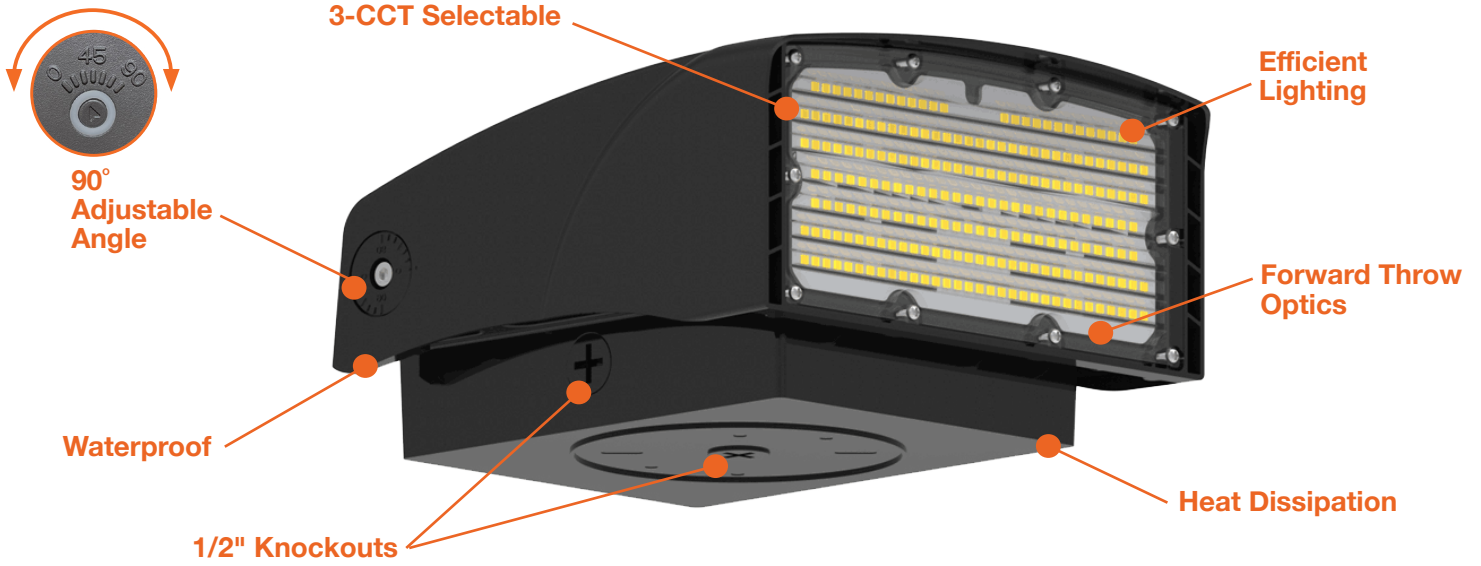

DIMENSIONS

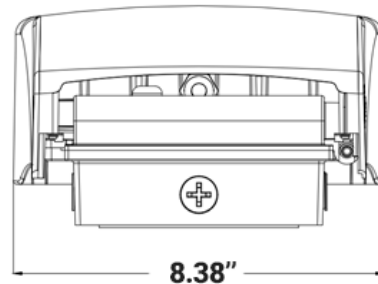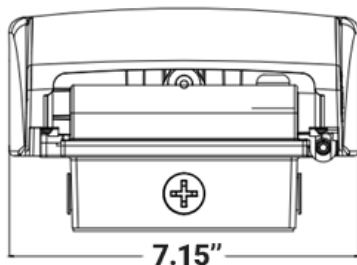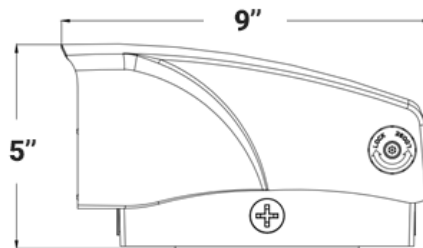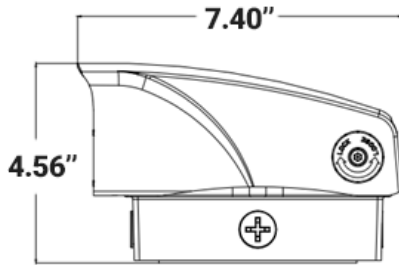

3P50W

3P80W



S-LINE-R



S-BMS-EXT-1
S-BMS-EXT-1-BT

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-ADJ-30W-TRI-BZ	120-277V	30W	145LM/W	30/40/50k	>80
LED-WPFC-ADJ-3P50W-TRI-BZ	120-277V	30/40/50W	145LM/W	30/40/50k	>80
LED-WPFC-ADJ-3P80W-TRI-BZ	120-277V	60/70/80W	145LM/W	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w