



# ARCY-Line: Tubular Linear Fixtures

4-CCT Selectable



### Detail Specifications:

- Finish: White, custom available
- IP Rating: Damp Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: Acrylic Frosted Lens Standard: efficiently emits the light through a high-quality acrylic lens, spreading it evenly and without causing glare
- Average life (L70) of 50,000 hours

### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

### Product Information:

- Construction: aluminum housing with frosted lens
- L-Corner connector available (Does not emit light)
- Finished with corrosion free powder coating
- 6' power cord included on each fixture
- Select-n-Switch Technology: 4-CCT Selectable

### Driver Options:

- Max Run: 600W off one power feed
- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- 3-Power Selectable
- Flicker Free

### Mounting & Installation:

- 5-wire 6' power cord is included. 6-wire power cord is included with emergency models
- 6' Canopy suspension kit (1 power feed) must be purchased separately

### Certifications:

- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

**LUMENS/FT.**

POWER SETTING	DOWNLIGHT
Lowest	975
Middle	1,300
Highest	1,625

**LUMENS/WATTAGE**

WATTAGE	DOWNLIGHT	DOWN/UP LIGHT
30w	3,900	975
40w	5,200	1,300
50w	6,500	1,625



Series	Length & Watt	Light Direction	CCT	Finish <sup>1</sup>	Emergency
<b>LED-TBL</b>	-	-	- <b>4CCT</b> -	-	-
Tubular	<b>2FT-20W</b>	<b>D</b>	30/35	<b>D</b>	<b>Blank</b>
Architectural	20W	Downlight	40/50K	Downlight	None
Linear	<b>4FT-40W</b>	Only		Only	<b>EMB</b>
	40W	<b>UD</b>		<b>UD</b>	Emergency
	<b>8FT-80W</b>	Up		Up	Backup
	80W	& Downlight		& Downlight	


1. Standard quick ship finish is white. Other colors are custom finishes.

### Optional Accessories (Order Separately)




Round Trim Options	Round Trim Options
<b>SK-6FT-I-CP-TH</b>	<b>TBL-L</b>
6' Single Wire	L-Shape
White Finish	Connector

Specs and model numbers are subject to change with or without notice. Customization of product is available.

**FEATURES**

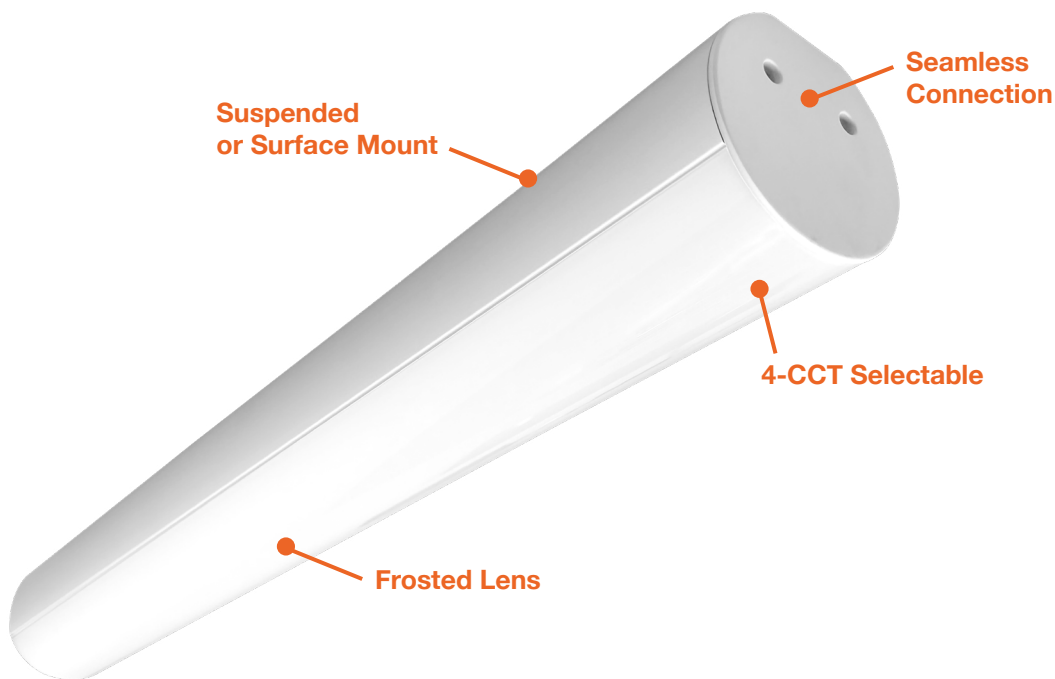

**DIMENSIONS**

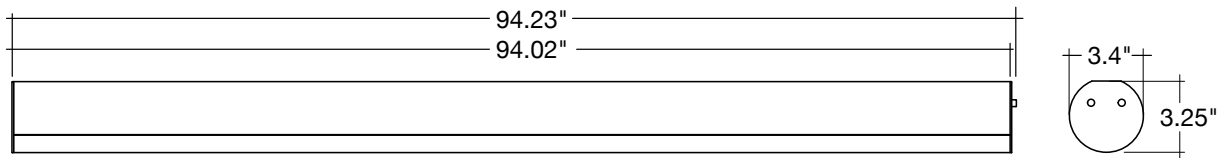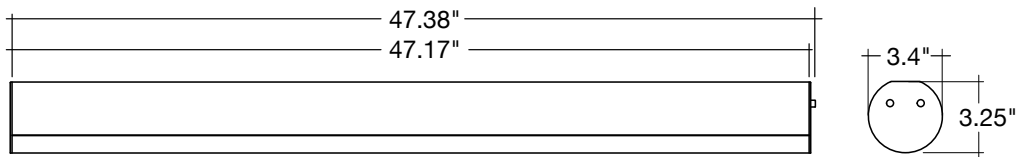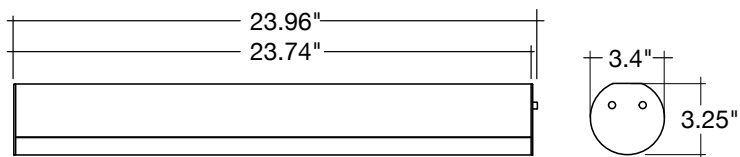

*Specs and model numbers are subject to change with or without notice. Customization of product is available.*

Suspended or Surface Mounted Linear  
Models: Downlight Only

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-D-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-D-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-D-4CCT-WH	120-277V	80w	9,200	50/40/35/30k

Suspended Linear Models: 80% Downlight & 20% Uplight

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-UD-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-UD-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-UD-4CCT-WH	120-277V	80w	9,200	50/40/35/30k

## ACCESSORIES

Model	Description
SK-6FT-I-CP-TH	6" Suspension Kit for ATL
TBL-L	L-Shape Connector

## L CORNER PATTERNS

