

2' & 4' Prismatic LED Wrap

6-CCT Selectable

Project: _____ Part #: _____
Type: _____

Wraps



Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Prismatic Ribbed
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Residential, Commercial and Industrial

Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- Select-n-Switch Technology: 6-CCT + 3-Power Selectable
- 1/2" Knockout on both ends of the fixture

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installation:

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available

Certifications:

- ETL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Size/Power	CCT	Voltage
LED-WRP-PRM -	2FT-20W	-6CCT - UNV	120-277V
	20W • 2,300LM		
	4FT-40W	65/50/40	
	40W • 4,600LM	35/30/27K	


1. Standard quick ship finish is white. Other colors are custom finishes

Optional Accessories (Order Separately)

Sensor	Emergency	Suspension Kits
BMS	EMB	SK-10FT-Y-LC-PD
Bi-Level Motion + Daylight Sensor (HD407VC-R)	Emergency Backup	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
		SK-20FT-Y-LC-PD
		20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
		CK-6FT-V
		6' Chain Hanging Kit

Specs and model numbers are subject to change with or without notice.

FEATURES

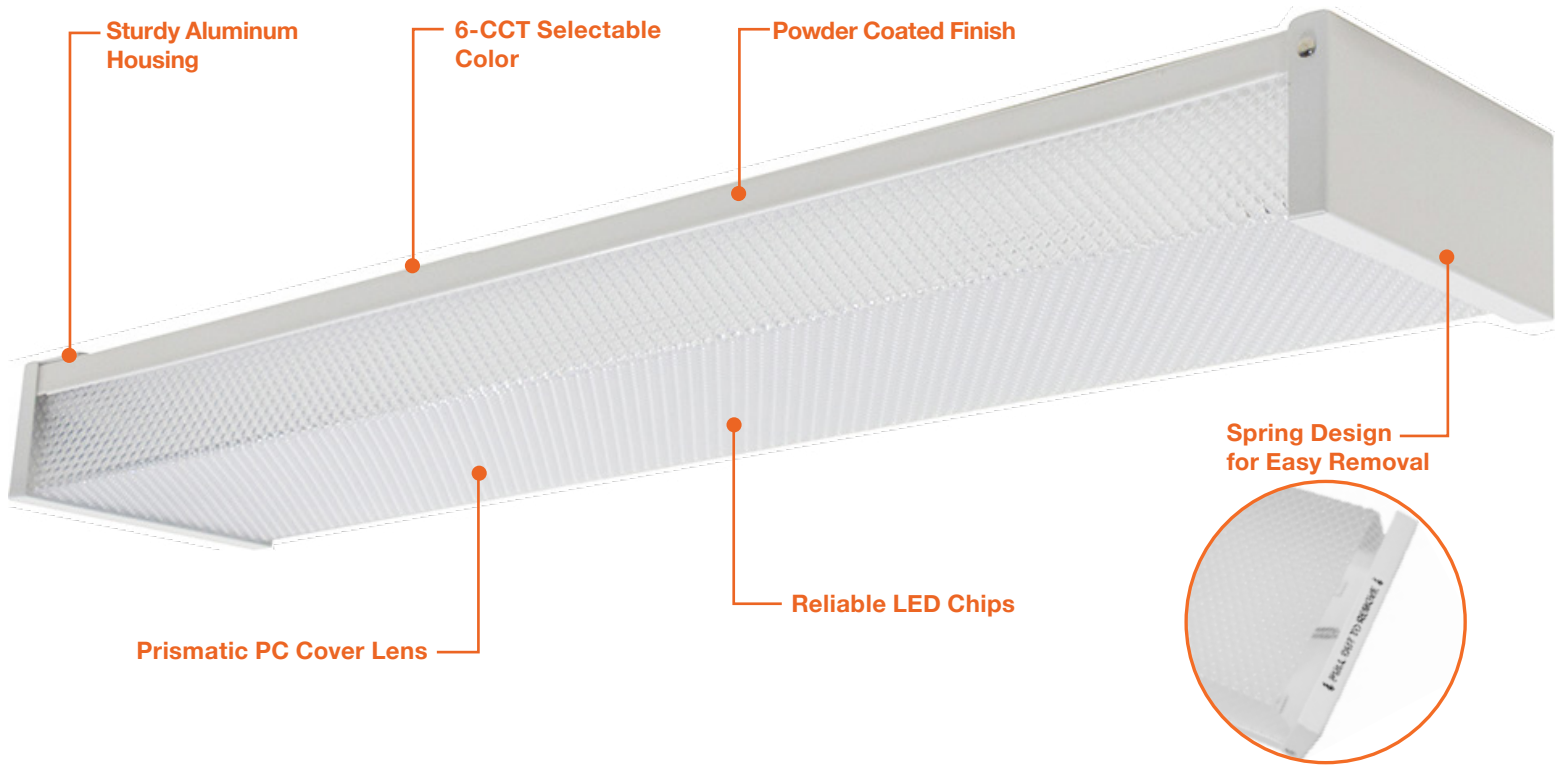


DIMENSIONS

2 Foot



4 Foot

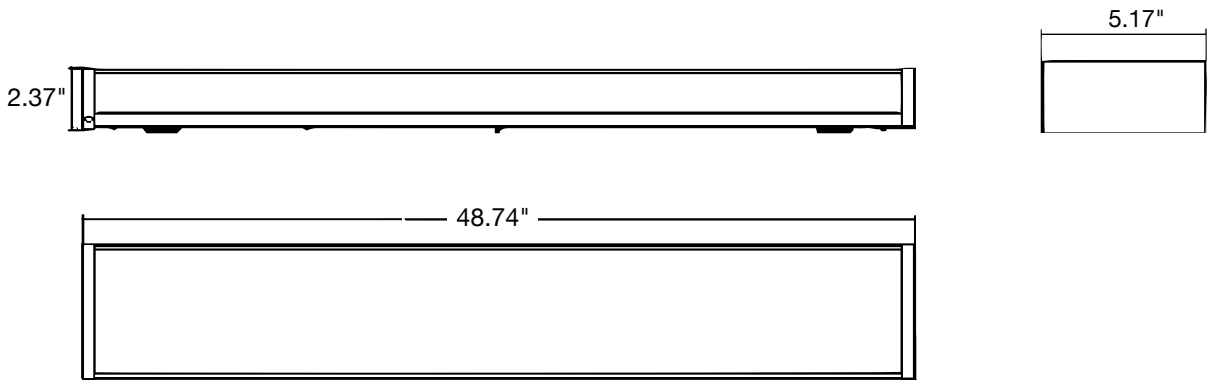



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD



CK-6FT-V



HD407V-CR

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-PRM-2FT-20W-6CCT-UNV	120-277V	20w	2,300	27/30/35/40/50/65k	>80
LED-WRP-PRM-4FT-40W-6CCT-UNV	120-277V	40w	4,600	27/30/35/40/50/65k	>80

SUSPENSION KIT

Model	Description
SK-10FT-Y-LC-PD	Suspension Kit: 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

SENSOR

Model	Item Description	Voltage	Watts
HD407V-CR	Bi Level Motion Sensor w/ Daylight Harvesting Detachable Version w/ external sensor -Remote Control Compatible	120-277V	<1w