



Texas Fluorescents
Reinvented

CATALOG#:

PROJECT:

TYPE:

Series 555

LED Ceiling/Wall Mount Luminaire

Stylish ceiling/wall mounted luminaire in either white or walnut finish with a variety of LED combinations and sizes enhanced by linear sided acrylic diffuser. Designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over or beside mirrors, over bulletin boards, in vanities and in displays.

CONSTRUCTION

All metal parts are die-formed from heavy gauge cold rolled steel with overlapping end caps to insure uniformity and dimensional stability.

MOUNTING

Back plate provided with adequate knockouts and mounting holes for either wall or ceiling installation.

TYPICAL OPTIONS & ACCESSORIES

Custom finishes, internal divider, front baffle, pull chains, convenience outlets. Contact factory for custom options.



DIMENSIONS

4.37"H x 4.52"W x 24.0"L

4.37"H x 4.52"W x 48.3"L


FEATURES & BENEFITS

- Linear sided prismatic lens of extruded acrylic for controlled light.
- The LED color spectrum illuminates indoor building stairways perfectly.
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty




DRAWINGS & IMAGES


2 Ft. - Back

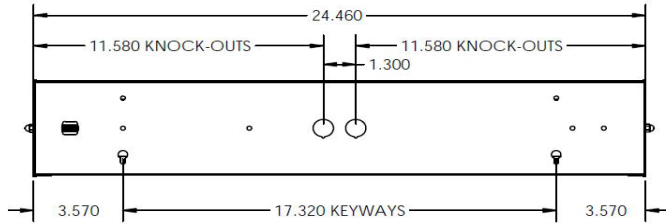

4 Ft. - Back

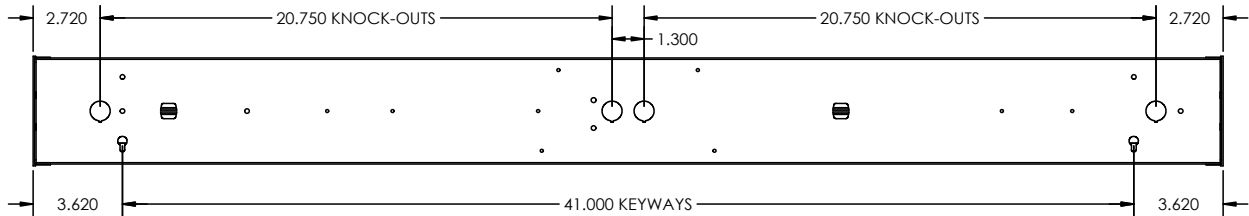

End

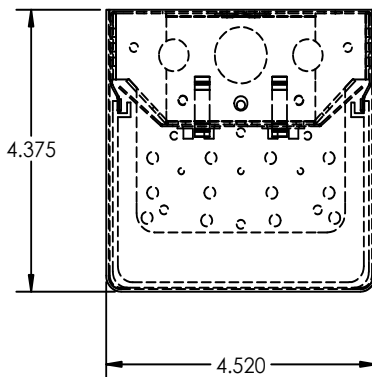



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 555

LED Ceiling/Wall Luminaire

ORDER INFORMATION

4 Ft

| SERIES | LENS MATERIAL | LENGTH | WATTAGE & LUMENS | DIVIDER & FRONT SHIELD | DRIVER |
|--------|---------------------------|---------|--|--|-------------------|
| 555 | A Clear prismatic acrylic | 48L 48" | F30W4100L 30 Watts 4100 Lumens | Blank No divider D Divider only F Front shield only T Top shield only | DMV 0-10V Dimming |
| | MW Smooth white acrylic | | F48W6000L 48 Watts 6000 Lumens F57W6900L 57 Watts 6900 Lumens | | |

| COLOR | FINISH | OPTIONS |
|-----------|--|--|
| 30K 3000K | WH White | SW2 Pull chain, 2 way switching (Use with single ballasts) GCO Grounded convenience outlet (North American 3 prong) |
| 35K 3500K | OAK Simulated oak painted finish | |
| 40K 4000K | WAL Simulated walnut painted finish | |
| 50K 5000K | CH Chrome finish CHEND Chrome finish on end caps only | |

2 Ft

| SERIES | LENS MATERIAL | LENGTH | WATTAGE & LUMENS | DIVIDER & FRONT SHIELD | DRIVER |
|--------|---------------------------|---------|--|--|-------------------|
| 555 | A Clear prismatic acrylic | 24L 24" | F24W2400L 24 Watts 2400 Lumens | Blank No divider D Divider only F Front shield only T Top shield only DF Divider & front shield TF Top & front shield | DMV 0-10V Dimming |
| | MW Smooth white acrylic | | F28W2700L 28 Watts 2700 Lumens F35W3200L 35 Watts 3200 Lumens | | |

| COLOR | FINISH | OPTIONS |
|-----------|--|--|
| 30K 3000K | WH White | SW2 Pull chain, 2 way switching (Use with single ballasts) GCO Grounded convenience outlet (North American 3 prong) |
| 35K 3500K | OAK Simulated oak painted finish | |
| 40K 4000K | WAL Simulated walnut painted finish | |
| 50K 5000K | CH Chrome finish CHEND Chrome finish on end caps only | |



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 555
LED Ceiling/Wall Luminaire

ORDER INFORMATION

DLC Listed Items

| ITEM NUMBER |
|-------------|
| |

- 555A48LF57W6900LDMV35K
- 555A48LF48W6000LDMV35K
- 555A48LF48W6000LDMV35K
- 555A48LF30W4100LDMV35K
- 555A48LF30W4100LDMV35K
- 555A48LF57W6900LDMV35K
- 555A48LF30W4100LDMV35K
- 555A48LF57W6900LDMV35K
- 555A48LF57W6900LDMV35K
- 555A48LF48W6000LDMV35K
- 555A48LF48W6000LDMV35K
- 555A48LF30W4100LDMV35K

