



Item#: **57746**
LED 48" VAPOR TIGHT - 4 LAMP
LED READY FIXTURE

FEATURES

- Diffusing lens for uniform light.
- Gasket formed to housing provides a seamless seal and protects lamps from dust and humidity.
- Die formed galvanized steel mounting brackets.
- Stainless steel clips
- 18 AWG 3 Conductor (10A /-40°C ~ 90°C /Dia .305")

MOUNTING

Surface or suspended mounting.

APPLICATION

Ideal for commercial and industrial environments; tunnels, stairwells, parking garages, cold storage, and airports. *Not designed for use in car washes, truck wash bays, or where exposed to harsh chemicals.*



ELECTRICAL

Lamps Type (not included)	T8
Number of Lamps	4
Voltage	120-277V

ENVIRONMENT

Operating Temperature	-4° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Warranty (Years)	2
------------------	----------

CONSTRUCTIONS

Housing	Polycarbonate
Lens	Vandal Resistant / PC
Sockets	Non-Shunted
Base / Power Supply	Hard Wired
Clips	Stainless Steel
Finish	White

CERTIFICATIONS



Operating temperature may vary depending on the lamps used. • Specifications are subject to change without notice.


Item#: **57746**
LED 48" VAPOR TIGHT - 4 LAMP

DIMENSIONS (Inches)

Length	50"
Width	17"
Height	4.1"
Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

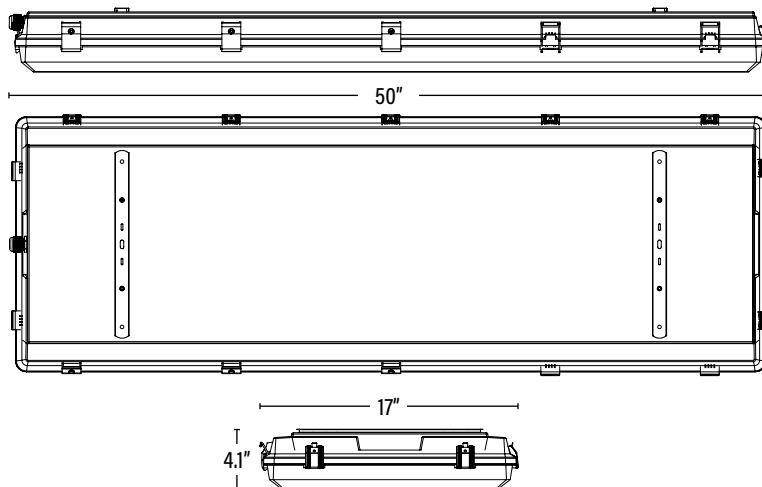

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768027587	50.8" x 17.7" x 3.3"	20.9
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
57746	LED 4FT VAPOR TIGHT FOR 4 T8	1

REPLACEMENT PARTS

57730	STAINLESS STEEL CLIPS	1
57736	REPLACEMENT LENS FOR 4 LAMP VAPOR TIGHT	1

ADDITIONAL INFORMATION:

- Pairs with Direct Wire Single-End or Double-End UL Type B Lamps. Single-end pre-wired fixtures can also be wired double-end by the end- user if needed. Follow specific lamp installation wiring instructions for correct wiring.