





10" 30W



COMMERCIAL DOWNLIGHT

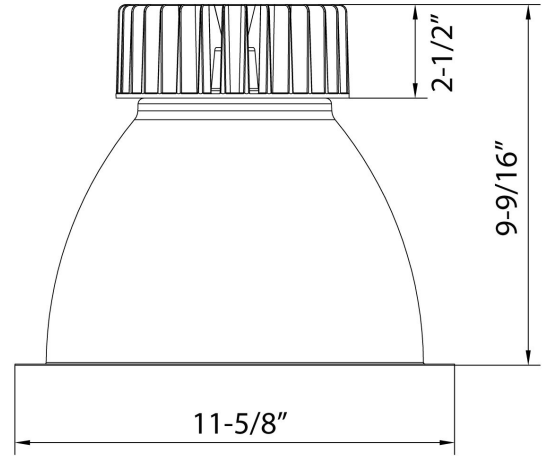

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/Watt	Energy Star
72666	White	30W	2900	4000K	120-277	.2454A	96	Yes

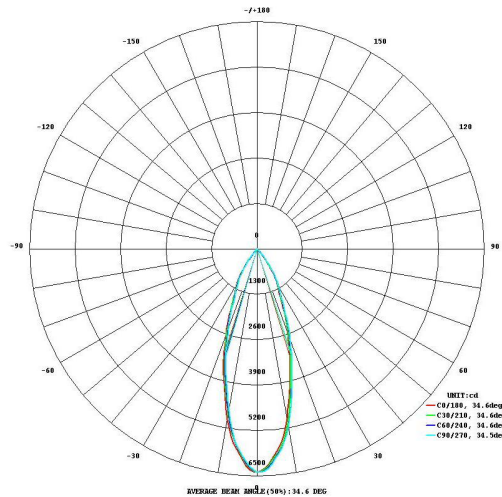

Warehouse-Lighting.com
 2750 South 163rd St
 New Berlin, WI 53151

Warehouse-Lighting.com
 Phone: 888-454-4480
info@warehouse-lighting.com



10" 30W

COMMERCIAL DOWNLIGHT

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .2454A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

30 Watts

Efficacy: 96 lumens per watt

50,000+ LED Life Span

CCT: 4000k (Neutral White)

Chromaticity Measurements:

Beam Angle: 35°

BUG Rating: N/A

CRI: ≥ 82.2

R9: 8

DUV: 0.00034

Chromaticity (x,y): $x=.4638$; $y=.4123$

Chromaticity (u,v): $u=.2642$; $v=.3524$

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts:

Driver Output Amps:

Surge Protection: 2500V

Dimming: 0-10 Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

White Trim

IP Rating: IP43 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: UL, Energy Star

Carton Qty: 1

Weight: 7 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).




WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com




10" 30W COMMERCIAL DOWNLIGHT

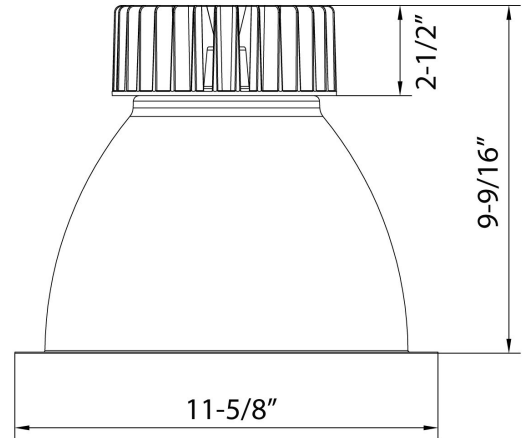

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/Watt	Energy Star
72667	White	30W	2900	5000K	120-277	.2454A	96	Yes

PHOTOMETRY

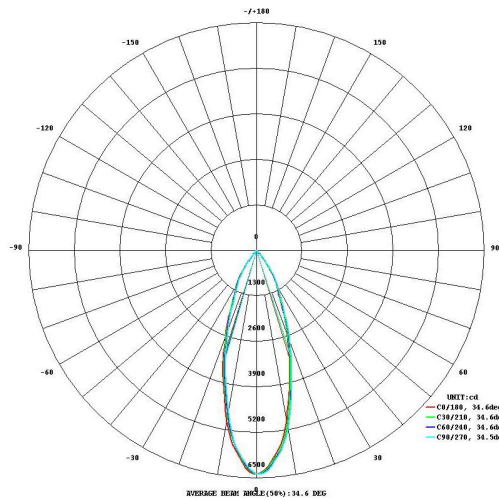

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com



10" 30W

COMMERCIAL DOWNLIGHT

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .2454A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

30 Watts

Efficacy: 96 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 35°

BUG Rating: N/A

CRI: ≥ 82.2

R9: 8

DUV: 0.00034

Chromaticity (x,y): $x=.4638$; $y=.4123$

Chromaticity (u,v): $u=.2642$; $v=.3524$

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts:

Driver Output Amps:

Surge Protection: 2500V

Dimming: 0-10 Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

White Trim

IP Rating: IP43 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: UL, Energy Star

Carton Qty: 1

Weight: 7 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com