





10" 40W COMMERCIAL DOWNLIGHT

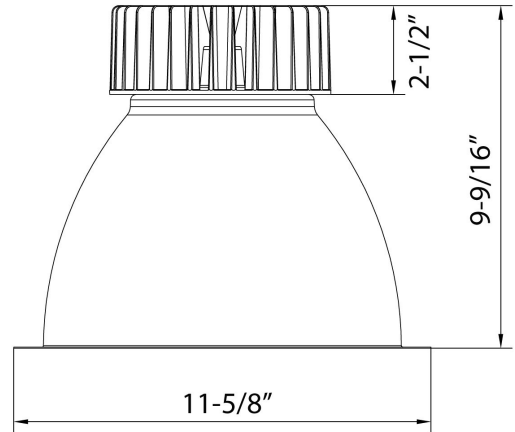

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/Watt	Energy Star
72668	White	40W	4000	4000K	120-277	.3441A	100	Yes

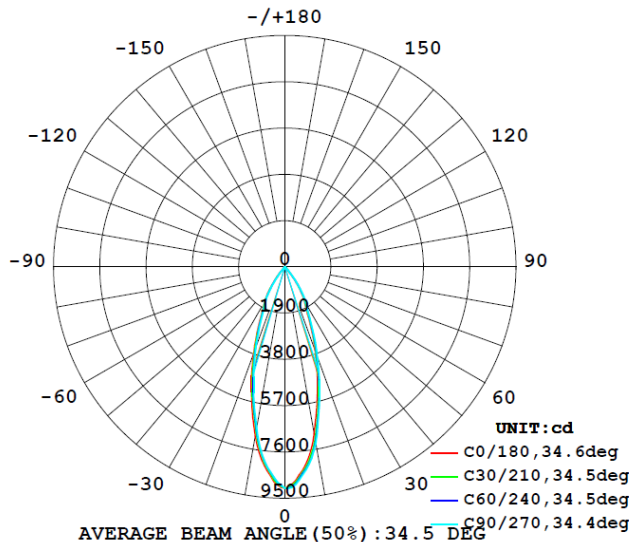

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com



10" 40W

COMMERCIAL DOWNLIGHT

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .3441A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

40 Watts

Efficacy: 96 lumens per watt

50,000+ LED Life Span

CCT: 4000K (Neutral White)

Chromaticity Measurements:

Beam Angle: 35°

BUG Rating: N/A

CRI: ≥ 82.1

R9: 9

DUV: 0.00075

Chromaticity (x,y): $x=.3895$; $y=.3838$

Chromaticity (u,v): $u=.2282$; $v=.3373$

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts:

Driver Output Amps:

Surge Protection: 2500V

Dimming: 0-10 Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

White Trim

IP Rating: IP43 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: UL, Energy Star

Carton Qty: 1

Weight: 7 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).




WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com




10" 40W COMMERCIAL DOWNLIGHT

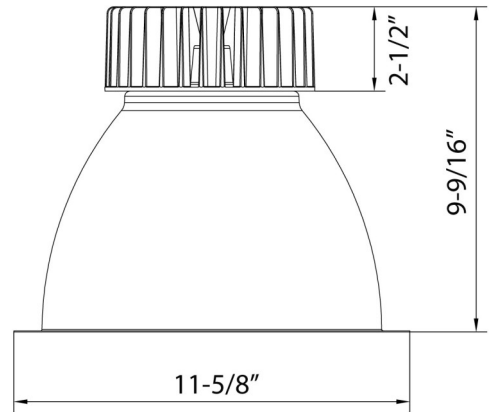

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/ Watt	Energy Star
72669	White	40W	4000	5000K	120-277	.3441A	100	Yes

PHOTOMETRY

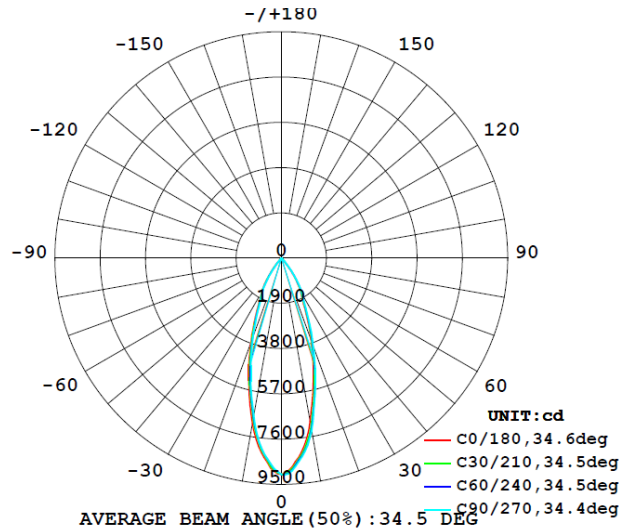

WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com



10" 40W

COMMERCIAL DOWNLIGHT

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .3441A @ 120V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

40 Watts

Efficacy: 96 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 35°

BUG Rating: N/A

CRI: ≥ 82.1

R9: 9

DUV: 0.00075

Chromaticity (x,y): $x=.3895$; $y=.3838$

Chromaticity (u,v): $u=.2282$; $v=.3373$

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts:

Driver Output Amps:

Surge Protection: 2500V

Dimming: 0-10 Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

White Trim

IP Rating: IP43 Wet Indoor Location Rated

Lens Material: Frosted Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: UL, Energy Star

Carton Qty: 1

Weight: 7 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com