




75120A | 75123A | 75126A LED Driverless Gooseneck Flood light 40W, 120/240/277V, White

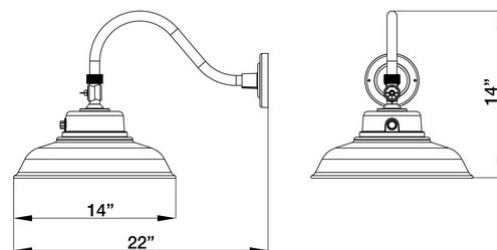


Features:

- Clear Polycarbonate Lens
- Swivel head fixture
- Operating Temperature: -40°F to 122°F
- Photocell Included
- Powder Coated: White
- Aluminum Housing
- Environment: IP65 Rated - Suitable for Wet Locations
- Certification: ETL
- 5 Year Limited Warranty

Part #	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Lighting Pattern	Lumens/Watt
75120A	40W	120/240/277	5,219	3000K	>72	N/A	Outdoor	138lm/W
75123A			4,800	4000K				
75126A			4,800	5000K				

PHOTOMETRY

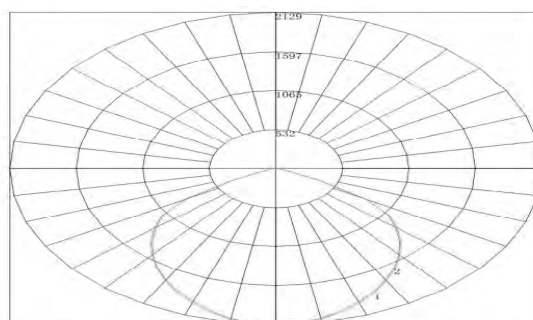

Maximum Candela = 2129.347 - Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

Lighting Supplier Since 2003



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
 2750 South 163rd St
 New Berlin, WI 53151

Warehouse-Lighting.com
 Phone: 888-454-4480
info@warehouse-lighting.com



75120A | 75123A | 75126A

LED Driverless Gooseneck Flood light

40W, 120/240/277V, White

Technical Specifications:

Electrical:

Input Voltage: 120V/240V/277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor: $\geq .9$

THD: <20% @120V

Chromacity

Measurements: Beam

Angle: Outdoor

CRI: >72

R9: 0

Component

Specifications:

LED: LumiLED LUXEON 3030

Driver Voltage: 120/240/277V

Frequency: 50-60Hz

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 122°F

Construction:

Housing: Aluminum Housing

Powder Coat Finish: White

IP Rating: IP65 - Suitable for wet locations

Lens Material: Clear Polycarbonate Lens

Mounting: Wall

Listings: ETL

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Lighting Supplier Since 2003



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com