

Perryton 8 Light Island

6615008 | I.1

GENERATION LIGHTING PENDANTS

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


SAVE THESE INSTRUCTIONS!

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

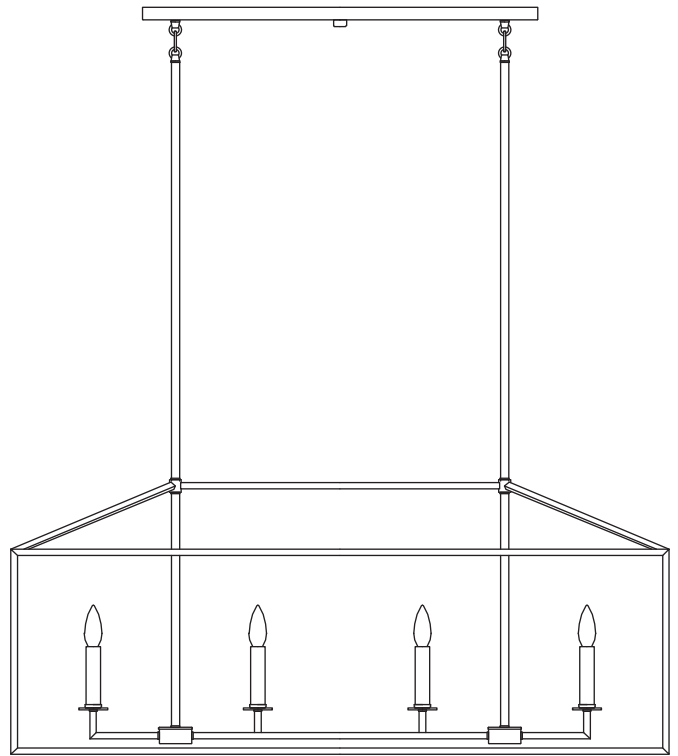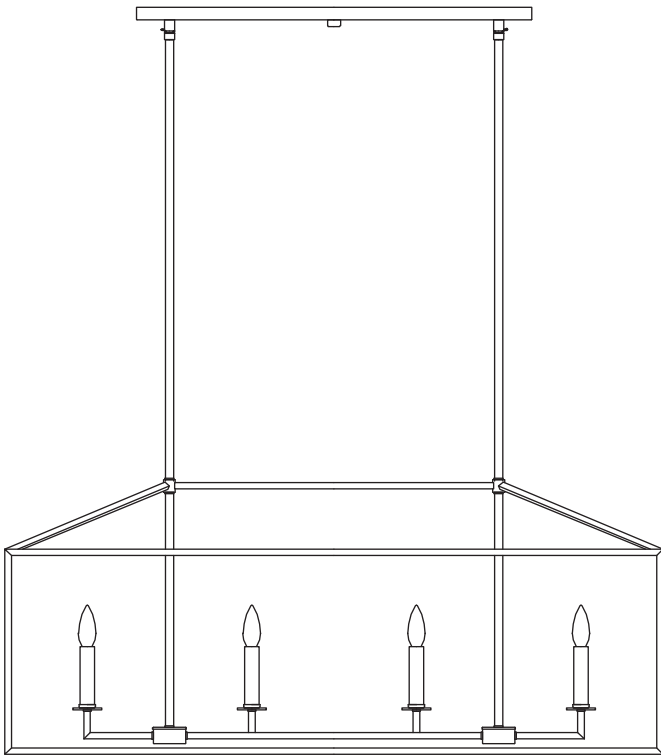

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

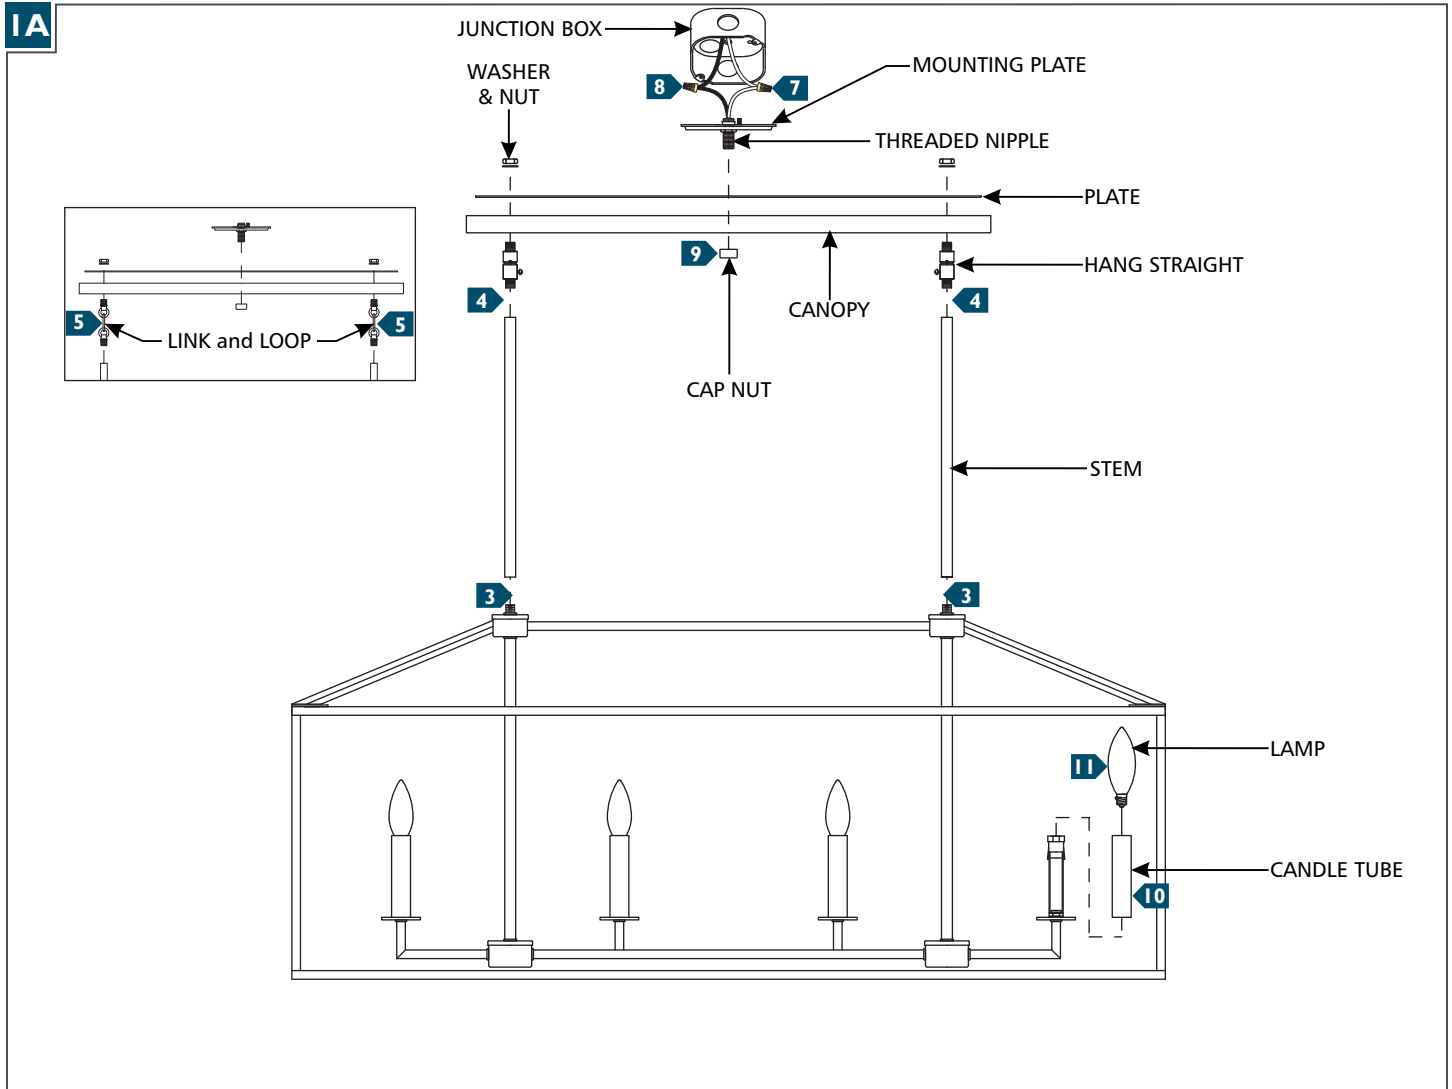

- 1 If necessary, screw the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the junction box.
- 3 Determine the wanted height or look of the fixture with the provided stems, feed the fixture wires through the stems and assemble them by screwing them together, then screw the stem assemblies onto the top of the fixture.
- 4 **For standard ceilings:** Unscrew the hex nuts and washers and remove the hang straights from the canopy. Feed the fixture wires through the hang straight, then screw the hang straight to the stems. Feed the fixture wires through the canopy, plate, washers, and nuts, place the canopy and plate onto the hang straight. Tighten the hex nuts and washers onto the hang straights to secure in place.
- 5 **For sloped ceilings:** Unscrew the hex nuts and washers and remove the hang straights from the canopy. Feed the fixture wires through the link and loop, then the canopy. Screw the link and loop to the stems. Feed the fixture wires through the plate, washers, and nuts, place the canopy and plate onto the link and loop. Tighten the hex nuts and washers onto the link and loops to secure in place.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9 Neatly place all the wires into the junction box, place the canopy onto the threaded nipple, and secure it in place by screwing the cap nut onto the threaded nipple.
- 10 Install the candle tube by sliding it over the socket. Repeat for remaining sockets.
- 11 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.