




INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Beam Direct Series

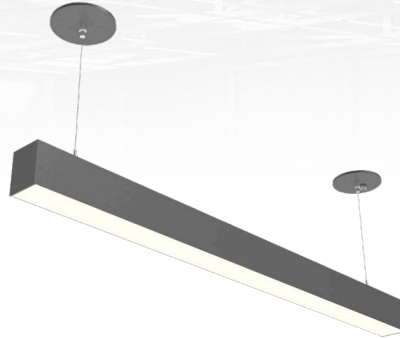

This linear down light fixture can fulfill a number of lighting needs. It is available in 2 foot, 4 foot, 6 foot and 8 foot lengths and in white, black, or silver finishes. It can be surface, wall\*, recessed\* and pendant mounted. Mix and match fixture lengths with L, X, Y, and T shaped connectors.

## Specifications – 4 Foot

CRI	>80	Ratings & Certifications	cULus, Damp Location, DLC v5.1
Light Source	Integrated LED	Beam Angle	Wide
Dimmable	0-10v	Linkable	600 watt maximum
Color Temperature	3000K - 3500K - 4000K - 5000K	Mounting Options	Surface, Suspended, Wall*, T-Bar*, Recessed*
Wattage	40W	Operating Temperature	-20° C to 40° C (-4° F to 104° F)
LPW	110	Lumens	4400-4800
Voltage	120-277v	Lens	Polycarbonate Frosted
Product Dimensions	47.32" L x 2.76" W x 3.35" H	Product Weight	6.61 lbs.
Shipping Dimensions	48.62" L x 2.99" W x 3.74" H	Shipping Weight	7.72 lbs
Finish	Black, White and Silver	Warranty	5 Years

\*Hardware purchased separately.





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

Beam Direct G2				Example: BEAMLED8-80W-4CT-DMV-BK-G2		
Series	Length	Wattage	CCT	Voltage	Finish	Generation
<b>BEAMLED</b>	<b>2</b> 4 Foot	<b>20W</b> 20 Watt	<b>4CT</b> 30K-35K-40K-50K	<b>DMV</b> Universal Voltage (120-277) 0-10v dimming	<b>BK</b> Black	<b>G2</b>
	<b>4</b> 4 Foot	<b>40W</b> 40 Watt			<b>WH</b> White	
	<b>6</b> 6 Foot	<b>60W</b> 60 Watt			<b>SV</b> Silver *4' and 8' only	
	<b>8</b> 8 Foot	<b>80W</b> 80 Watt				

## Mount Options

Suspended (Included)



Wall Mount Kit




Surface Mount Kit (Included)



Mud Flange Kit



Recessed Flange Kit





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_


## DLC Information

Item	DLC Version	DLC ID	Wattage	Lumens*
beamled4-40w-4ct-dmv-wh-g2	5.1 Premium	S-ZIAU9W	40W	4608
beamled8-80w-4ct-dmv-wh-g2	5.1 Premium	S-T11QSR	80W	9263

## Dimensions

Item	Length	Width	Height	Weight
beamled2-20w-4ct-dmv- [bk, wh]-g2	23.9"	2.76"	3.35"	3.74 lbs.
beamled4-40w-4ct-dmv- [bk, wh, sv]-g2	47.32"	2.76"	3.35"	6.61 lbs.
beamled6-60w-4ct-dmv- [bk, wh]-g2	70.71"	2.76"	3.35"	8.81 lbs.
beamled8-80w-4ct-dmv- [bk, wh, sv]-g2	94.17"	2.76"	3.35"	12.13 lbs.


### BEAMLED2




### BEAMLED4



### BEAMLED6



### BEAMLED8






INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Connector Options

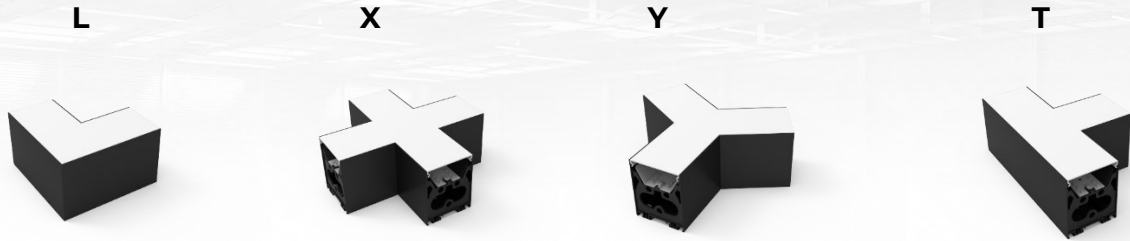

Our Linear Architectural Beam G2 series fixtures are now available with innovative connector pieces that let you arrange them in a practically limitless selection of shapes, configurations, and even patterns.



Item	Joint Type	Dimensions	Weight
BEAM-4CCT-L-CNTR-BK-G2	L	5.79" L x 5.79" W x 3.35" H	1.1 lbs
BEAM-4CCT-L-CNTR-WH-G2	L	5.79" L x 5.79" W x 3.35" H	1.1 lbs
BEAM-4CCT-X-CNTR-BK-G2	X	8.82" L x 8.82" W x 3.35" H	2.2 lbs
BEAM-4CCT-X-CNTR-WH-G2	X	8.82" L x 8.82" W x 3.35" H	2.2 lbs
BEAM-4CCT-Y-CNTR-BK-G2	Y	7.91" L x 6.85" W x 3.35" H	1.1 lbs
BEAM-4CCT-Y-CNTR-WH-G2	Y	7.91" L x 6.85" W x 3.35" H	1.1 lbs
BEAM-4CCT-T-CNTR-BK-G2	T	8.82" L x 5.79" W x 3.35" H	1.76 lbs
BEAM-4CCT-T-CNTR-WH-G2	T	8.82" L x 5.79" W x 3.35" H	1.76 lbs



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Compatible Dimmer List

Brand	Model
Lutron	DVSTV-WH Diva 8 Amp 3-way/Single-Pole 0-10V Dimmer
Eaton	Controls DF10P-C1 Decorator 0-10V Dimmer
Cooper	SF10P-W Slide 0-10V Dimmer
LuxDrive	Dimming Control - 0-10V Low Voltage Wall Mount
Lutron	DVTV-WH Diva 30mA Single Pole 0-10V Fluorescent
Leviton	DS710-10Z