




INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Beam Direct/Indirect G2 Series

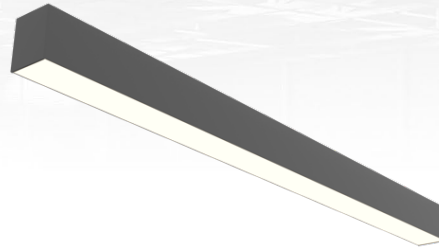

This linear up/down (direct/indirect) light fixture can fulfill a number of lighting needs. This fixture casts 38% of its wattage/lumens up and 62% of the wattage/lumens down. It can be wall and suspended mounted. A switch on top of the fixture allows the selectable CCT (3000K/3500K/4000K/5000K) to be set in the field. It is constructed of extruded aluminum and has a snap in polycarbonate diffuser to help reduce glare. Applications: commercial buildings, retail locations, universities/schools, and libraries. Mix and match fixture lengths with L, X, Y, and T shaped connectors.

Specifications – 6 Foot

CRI	>80	Beam Angle	Wide
Light Source	LED	Mounting Options	Suspended or Wall Mount
Dimmable	0-10v	Operating Temperature	-20° C to 40° C (-4° F to 104° F)
CCT	Selectable 3000K/3500K/4000K/5000K	Lens	Polycarbonate
Wattage	Selectable 45W/60W/75W/100W	Voltage	120-277v
LPW	100-105	Finish	Black or White
Lumens	4,000-7,000	Warranty	5 Years
Ratings and Certifications	cULus		

*Hardware purchased separately.





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information

Linear Architectural Beam G3				Ex: BEAMLED4-ADJ-DID-4CT-DMV-WH-G2			
Series	Length	Selectable	Light	CCT Select	Dimming/Voltage	Finish	Generation
BEAMLED	2 2 Foot	ADJ Adjustable up/down light %	DID Direct/Indirect (up and down light)	4CT 3000K 3500K 4000K 5000K	DMV 0-10v dimming 120-277v	WH white BK black SV Silver *4' and 8' Only	G2
	4 4 Foot						
	6 6 Foot						
	8 8 Foot						

Mount Options

Suspended (Included)

Wall Mount Kit






INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____


Dimensions

Item	Length	Width	Height	Weight
BEAMLED2-ADJ-DID-30W-4CT-DMV-[BK, WH]-G2	23.9"	2.76"	3.35"	4.18 lbs.
BEAMLED4-ADJ-DID-60W-4CT-DMV-[BK, WH, SV]-G2	47.4"	2.75"	3.35"	8.4 lbs.
BEAMLED6-ADJ-DID-90W-4CT-DMV-[BK, WH]-G2	70.71"	2.76"	3.35"	9.36 lbs.
BEAMLED8-ADJ-DID-120W-4CT-DMV-[BK, WH, SV]-G2	94.4"	2.75"	3.35"	14.3 lbs.


BEAMLED2




BEAMLED4



BEAMLED6

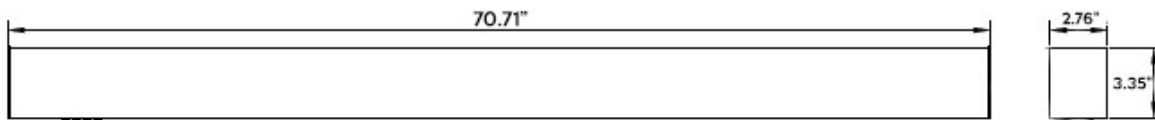

BEAMLED8








INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Connector Options

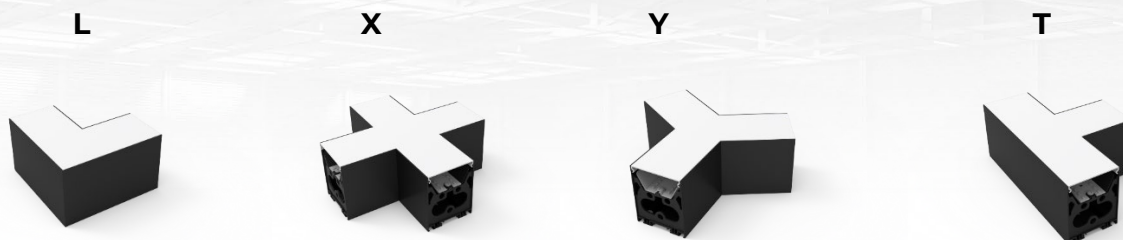

Our Linear Architectural Beam G2 series fixtures are now available with innovative connector pieces that let you arrange them in a practically limitless selection of shapes, configurations, and even patterns.

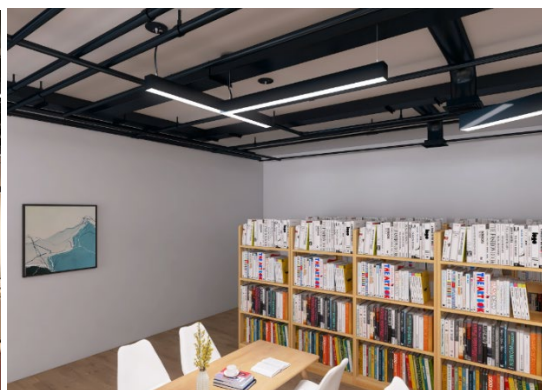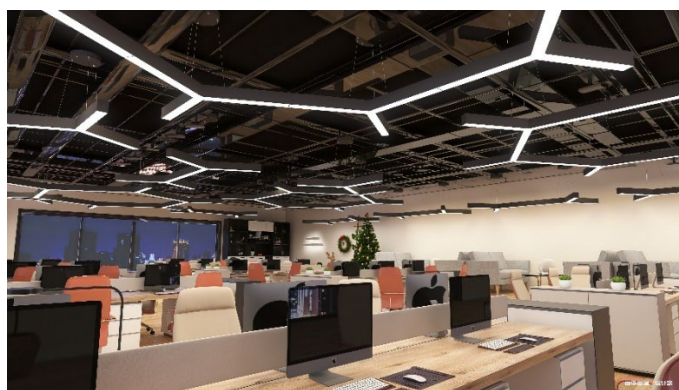

Item	Joint Type	Dimensions	Weight
BEAM-4CCT-L-CNTR-BK-G2	L	5.79" L x 5.79" W x 3.35" H	1.1 lbs
BEAM-4CCT-L-CNTR-WH-G2	L	5.79" L x 5.79" W x 3.35" H	1.1 lbs
BEAM-4CCT-X-CNTR-BK-G2	X	8.82" L x 8.82" W x 3.35" H	2.2 lbs
BEAM-4CCT-X-CNTR-WH-G2	X	8.82" L x 8.82" W x 3.35" H	2.2 lbs
BEAM-4CCT-Y-CNTR-BK-G2	Y	7.91" L x 6.85" W x 3.35" H	1.1 lbs
BEAM-4CCT-Y-CNTR-WH-G2	Y	7.91" L x 6.85" W x 3.35" H	1.1 lbs
BEAM-4CCT-T-CNTR-BK-G2	T	8.82" L x 5.79" W x 3.35" H	1.76 lbs
BEAM-4CCT-T-CNTR-WH-G2	T	8.82" L x 5.79" W x 3.35" H	1.76 lbs



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Compatible Dimmer List

Brand	Model
Lutron	DVSTV-WH Diva 8 Amp 3-way/Single-Pole 0-10V Dimmer
Eaton	Controls DF10P-C1 Decorator 0-10V Dimmer
Cooper	SF10P-W Slide 0-10V Dimmer
LuxDrive	Dimming Control - 0-10V Low Voltage Wall Mount
Lutron	DVTV-WH Diva 30mA Single Pole 0-10V Fluorescent
Leviton	DS710-10Z

Direct/Indirect Light Adjustment Options

	BEAMLEDX-ADJ-DID-XXW-4CT-DMV-G2
Up/Down Adjustments	0% Up and 100% Down
	30% Up and 70% Down
	40% Up and 60% Down
	50% Up and 50% Down
Up/Down CCT Selections**	3000K-35000K-4000K-5000K
	**Up and down can be controlled independently

X represents length and **XX** represents wattage.

